

# Marici 120 Specular TW



IP44-65






Ronde miniatuur tunable white LED downlight met lage inbouwhoogte en gesatineerde PS Microprisma afscherming. Brede bundel (>77°) en lage verblinding op maximaal vermogen (UGR<18). Hoogglans aluminium reflector. Tunable white - dynamisch mengen van licht kleur tussen 2700K en 6500K. Wit gelakte (RAL 9003) aluminium behuizing. Zeer geschikt als basis verlichting in scholen, theaters en musea. Wordt geleverd inclusief externe DALI DT8 driver. Directe aansluiting op 220-240VAC. Kleurstabiliteit Mac Adam <3. Snelle en eenvoudige montage met veren. Onderhoudsvrij en hoge levensduurverwachting (60.000 uur L90B10). Vijf jaar garantie.

Round miniature tunable white modular LED downlight with sated PS Microprism diffuser. Wide beam angle (>77°) and low glare at maximum power (UGR<18). Specular aluminum reflector. Tunable white - dynamic mixing of light colour, linear colour mixing between 2700K and 6500k. White painted die cast aluminum body (RAL9003). Very suitable as general lighting in schools, theatres and museums. Delivered including DALI DT8 driver. Direct connection to 220-240VAC. Colour stability, Mac Adam <3. Low maintenance and high life expectancy (60.000 hours L90B10). Fast and easy mounting with springs. Five years warranty.

Wattage Watts	Kleur Colour	Lumen* Lumen*	CRI CRI	Gewicht (kg) Weight (kg)	Noodvoorz. (u) Emergency (h)	Dali Dali	Casambi Casambi
13w	2700-6500k	1160-1320	>92	0,75	1/3	23008W.13.TW	23008W.13.TWC
19w	2700-6500k	1540-1745	>92	0,75	1/3	23008W.19.TW	23008W.19.TWC
26w	2700-6500k	2025-2300	>92	0,75	1/3	23008W.26.TW	23008W.26.TWC
34w	2700-6500k	2510-2845	>92	0,75	1/3	23008W.34.TW	23008W.34.TWC

\* Lichtstroom van armatuur, tolerantie van +/- 10%

\* Luminaire luminous flux, tolerance of +/- 10%

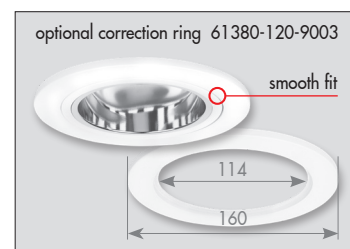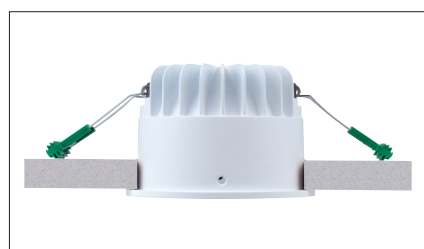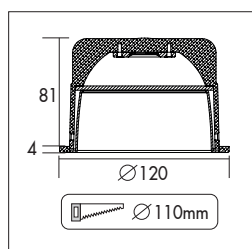

INBOUW DOWNLIGHTS RECESSED DOWNLIGHTS





### Opties:

- GST18i5® connector
- Andere RAL kleur
- IP65

### Options:

- GST18i5® connector
- Different RAL color
- IP65

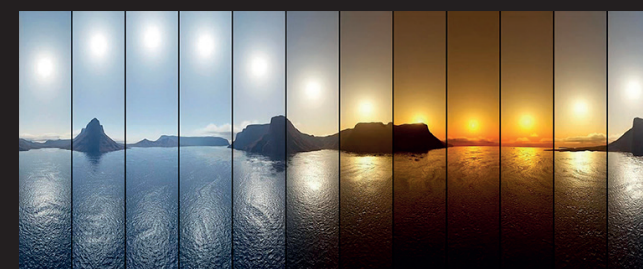

23008W.13.TW  
13w 2700-6500k 1160-1320lm  
ηLB 76%

melis lighting