

Ronde miniatuur LED downlight met een lage inbouwhoogte. Voorzien van decoratieve aluminium (99,9%) hoogglans reflector met brede uitstraling 77°(UGR<18) en hoge efficiency (max 131lm/w) met **CRI>93 (R9>83)**. Gesatineerde PS Microprisma afscherming voor extra comfort. Wit gelakte (RAL 9003) aluminium behuizing. Wordt geleverd inclusief externe driver. Directe aansluiting op 220-240VAC. Snelle en eenvoudige montage met veren. Onderhoudsarm en hoge levensduurverwachting. Hoge kleurconsistentie SDCM <2. Vijf jaar garantie.


Round minature LED downlight with shallow build-in height. High gloss aluminium reflector (99,9%) with wide beam angle 77° (UGR<18) and high efficiency (max 131lm/w) with **CRI>93 (R9>83)**. Satinated PS Microprism diffuser for high comfort. White painted die cast aluminum body (RAL9003). Delivered including external driver. Direct connection to 220-240VAC. Low maintenance and high life expectancy. High color consistency SDCM <2. Fast and easy mounting with springs. Five years warranty.

Wattage Watts	Kleur Colour	Lumen* Lumen*	CRI CRI	Amperage (mA) Amperage (mA)	kg kg	Noodvoorz. (u) Emergency (h)	Artikel nr. Article no.	Dimbaar (1-10V) Dimmable (1-10V)	Dali-2 Dali-2	Casambi Casambi
5w	3000k	657	>93	150	0,6	1/3	23008W.05.30	23008W.05.31	23008W.05.32	23008W.05.35
9w	3000k	1090	>93	250	0,6	1/3	23008W.09.30	23008W.09.31	23008W.09.32	23008W.09.35
13w	3000k	1513	>93	350	0,6	1/3	23008W.13.30	23008W.13.31	23008W.13.32	23008W.13.35
19w	3000k	2128	>93	500	0,6	1/3	23008W.19.30	23008W.19.31	23008W.19.32	23008W.19.35
27w	3000k	2909	>93	700	0,6	1/3	23008W.27.30	23008W.27.31	23008W.27.32	23008W.27.35

5w	4000k	657	>93	150	0,6	1/3	23008W.05.40	23008W.05.41	23008W.05.42	23008W.05.45
9w	4000k	1090	>93	250	0,6	1/3	23008W.09.40	23008W.09.41	23008W.09.42	23008W.09.45
13w	4000k	1513	>93	350	0,6	1/3	23008W.13.40	23008W.13.41	23008W.13.42	23008W.13.45
19w	4000k	2128	>93	500	0,6	1/3	23008W.19.40	23008W.19.41	23008W.19.42	23008W.19.45
27w	4000k	2909	>93	700	0,6	1/3	23008W.27.40	23008W.27.41	23008W.27.42	23008W.27.45

* Lichtstroom van armatuur, tolerantie van +/- 10%

* Luminaire luminous flux, tolerance of +/- 10%

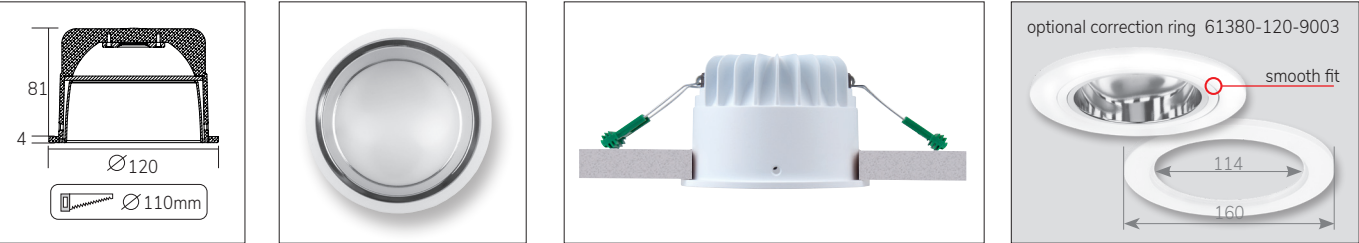

INBOUW DOWNLIGHTS

RECESSED DOWNLIGHTS




- Opties:**
- 1,5 meter snoer met 3-polige Shuko stekker
 - 0,5 meter snoer + GST18i3® connector (niet - dimbaar)
 - 0,5 meter snoer + GST18i3® and BST14i2 connector (dim)
 - 0,5 meter snoer + GST18i5® Blue connector male (dim)
 - Andere RAL kleur
 - 2700K, 3500k, 5000k of hogere CRI waarde 90/97
 - Vlees, brood of Crisp White
 - IP65

- Options:**
- 1,5m cable with Shuko 3-pin plug
 - 0,5 meter cable + GST18i3® connector (non - dimmable)
 - 0,5 meter cable + GST18i3® and BST14i2 connector (dim)
 - 0,5 meter cable + GST18i5® Blue connector male (dim)
 - Different RAL color
 - 2700k, 3500k, 5000k or higher CRI values 90/97
 - Meat, bread or Crisp White
 - IP65



Levensduurverwachting (uren) Life expectancy (hours)		
Watt	L80B10	L90B10
5	154.000	73.000
9	149.000	70.000
13	126.000	60.000
19	112.000	53.000
27	92.000	44.000



23008W.05.30
5w 3000k 657lm
ηLB 100%