Marici 120 Specular


Ronde miniatuur LED downlight met een lage inbouwhoogte. Voorzien van decoratieve aluminium (99,9%) hoogglans reflector met brede uitstraling 77° (UGR<18) en hoge efficiency (max 131lm/w) met **CRI>93 (R9>83)**. Gesatineerde PS Microprisma afscherming voor extra comfort. Wit gelakte (RAL 9003) aluminium behuizing. Wordt geleverd inclusief externe driver. Directe aansluiting op 220-240VAC. Snelle en eenvoudige montage met veren. Onderhoudsarm en hoge levensduurverwachting (L90B10 180.000 uur). Hoge kleurconsistentie SDCM <2. Vijf jaar garantie.

Round minature LED downlight with shallow build-in height. High gloss aluminium reflector (99,9%) with wide beam angle 77° (UGR<18) and high efficiency (max 131lm/w) with ***CRI>93 (R9>83)****. Satinated PS Microprism diffuser for high comfort. White painted die cast aluminum body (RAL9003). Delivered including external driver. Direct connection to 220-240VAC. Fast and easy mounting with springs. Low maintenance and high life expectancy (L90B10 180.000 hours). High color consistency SDCM <2. Five years warranty.*


Wattage Watts	**Kleur** Colour	**Lumen*** Lumen*	**CRI** CRI	**Amperage (mA)** Amperage (mA)	**kg** kg	**Noodvoorz. (u)** Emergency (h)	**Artikel nr.** Article no.	**Dimbaar (1-10V)** Dimmable (1-10V)	**Dali-2** Dali-2	**Casambi** Casambi
5w	3000k	657	>93	150	0,6	1/3	23008W.05.30	23008W.05.31	23008W.05.32	23008W.05.35
9w	3000k	1090	>93	250	0,6	1/3	23008W.09.30	23008W.09.31	23008W.09.32	23008W.09.35
13w	3000k	1513	>93	350	0,6	1/3	23008W.13.30	23008W.13.31	23008W.13.32	23008W.13.35
19w	3000k	2128	>93	500	0,6	1/3	23008W.19.30	23008W.19.31	23008W.19.32	23008W.19.35
27w	3000k	2909	>93	700	0,6	1/3	23008W.27.30	23008W.27.31	23008W.27.32	23008W.27.35
5w	4000k	657	>93	150	0,6	1/3	23008W.05.40	23008W.05.41	23008W.05.42	23008W.05.45
9w	4000k	1090	>93	250	0,6	1/3	23008W.09.40	23008W.09.41	23008W.09.42	23008W.09.45
13w	4000k	1513	>93	350	0,6	1/3	23008W.13.40	23008W.13.41	23008W.13.42	23008W.13.45
19w	4000k	2128	>93	500	0,6	1/3	23008W.19.40	23008W.19.41	23008W.19.42	23008W.19.45
27w	4000k	2909	>93	700	0,6	1/3	23008W.27.40	23008W.27.41	23008W.27.42	23008W.27.45


* Lichtstroom van armatuur, tolerantie van +/- 10%

* *Luminaire luminous flux, tolerance of +/- 10%*





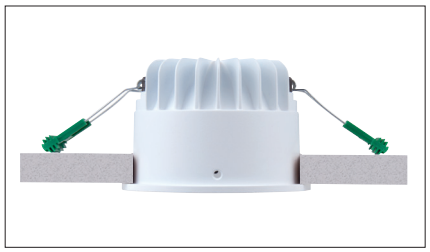

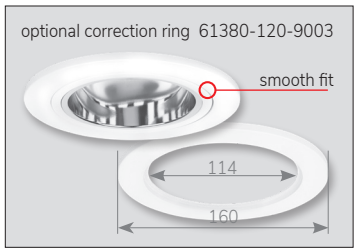




Opties:
- 1,5 meter snoer met 3-polige Shuko stekker
- 0,5 meter snoer + GST18i3® connector (niet - dimbaar)
- 0,5 meter snoer + GST18i3® and BST14i2 connector (dim)
- 0,5 meter snoer + GST18i5® Blue connector male (dim)
- Andere RAL kleur
- 2700K, 3500k, 5000k of hogere CRI waarde 90/97
- Vlees, brood of Crisp White
- IP65

Options:
- *1,5m cable with Shuko 3-pin plug*
- *0,5 meter cable + GST18i3® connector (non - dimmable)*
- *0,5 meter cable + GST18i3® and BST14i2 connector (dim)*
- *0,5 meter cable + GST18i5® Blue connector male (dim)*
- *Different RAL color*
- *2700k, 3500k, 5000k or higher CRI values 90/97*
- *Meat, bread or Crisp White*
- *IP65*





23008W.05.30
5w 3000k 657lm
ηLB 100%

melis lighting