

Marici 120 White RGB-TW







RGB en Tunable white LED downlight met witte reflector en gesatineerde PS Microprisma afscherming. Hoog rendement met wit gelakte aluminium reflector (>80%). Voorzien van dimbaar RGB + tunable white LED technology (>100lm/w, 2500-7000k, CRI>90). Aanstuurbaar via DALI DT8 (slechts 1 BUS adres). RGB dimming 0-100%, CCT dimming 5-100%. Wit gelakte (RAL 9003) aluminium behuizing. Zeer geschikt als basis verlichting in theaters, musea en ziekenhuizen. Wordt geleverd inclusief externe DALI driver. Directe aansluiting op 48VDC of 220-240VAC. Zeer hoge initiële kleurstabiliteit Mac Adam <1. Snelle en eenvoudige montage met veren. Onderhoudsvrij en hoge levensduurverwachting (50.000 uur L90B10). Vijf jaar garantie.

RGB and tunable white modular LED downlight with white high efficiency (>80%) white painted aluminum reflector and sated PS Microprism diffuser. Build-in RGB + tuneable white LED technology (>100lm/w, 2500-7000k, CRI>90). RGB dimming 0-100%, CCT dimming 5-100%. White painted die cast aluminum body (RAL9003). Ideal for museums, theaters and hospitals. Standard 0,5m cable. Delivered including external DALI driver. Direct connection to 48VDC or 220-240VAC. Very high initial colour stability, Mac Adam <1. Low maintenance and high life expectancy (50.000 hours L90B10). Fast and easy mounting with springs. Five years warranty.

Wattage Watts	Lumen* Lumen*	CRI CRI	Gewicht (kg) Weight (kg)	48VDC 48VDC	220-240VAC 220-240VAC	Casambi Casambi
22w	1630	>90	0,75	23008W.22D.RGBW	23008W.22A.RGBW	23008W.22C.RGBW
31w	2130	>90	0,75	23008W.31D.RGBW	23008W.31A.RGBW	23008W.31C.RGBW

* Lichtstroom van armatuur, tolerantie van +/- 10%

* Luminaire luminous flux, tolerance of +/- 10%

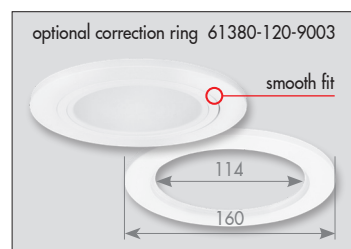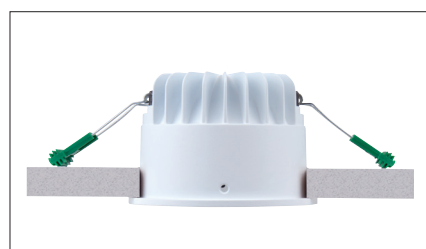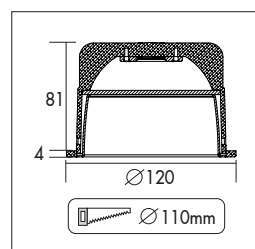

INBOUW DOWNLIGHTS RECESSED DOWNLIGHTS




Opties:

- GST18i5® connector
- Andere RAL kleur
- IP65

Options:

- GST18i5® connector
- Different RAL color
- IP65



23008W.31D.RGBW
31w 2130lm
ηLB 71%

melis lighting