Marici 130-140 FACET SUSPENDED


Ronde LED pendel downlight. Voorzien van decoratieve aluminium (99,9%) semi hoogglans facet reflector (UGR<21). Brede bundel >71,1° (UGR<19 - <1800lm) en hoge efficiency (max 161lm/w) met **CRI>93 (R9>83)**. Wit gelakte (RAL 9003) stalen behuizing. Wordt geleverd inclusief interne driver. Directe aansluiting op netspanning. Zeer geschikt als basis verlichting in gangen, kantoren, vides, kerken en moskeeën. Inclusief 3 meter snoer. Snelle en eenvoudige montage. Onderhoudsarm en hoge levensduurverwachting (L90B10 180.000 uur). Hoge kleurconsistentie SDCM <2.
Vijf jaar garantie.

Round suspended LED downlight. Semi specular faceted aluminum reflector (99,9%) (UGR<21). Wide beam angle >71,1° (UGR<19 - <1800lm) and high efficiency (max 161lm/w) with **CRI>93 (R9>83)**. *White painted steel body (RAL9003). Very suitable as general lighting in hallways, offices, high rooms like lobby's, churches and mosques. Delivered including internal driver and 3 meter cable. Direct connection to mains. Low maintenance and high life expectancy (L90B10 180.000 hours). High color consistency SDCM <2. Five years warranty.*


Wattage *Watts*	**Kleur** *Colour*	**Lumen*** *Lumen**	**CRI** *CRI*	**Amperage (mA)** *Amperage (mA)*	**kg** *kg*	**Noodvoorz. (u)** *Emergency (h)*	**Artikel nr.** *Article no.*	**Dimbaar (1-10V)** *Dimmable (1-10V)*	**Dali-2** *Dali-2*	**Casambi** *Casambi*
5w	3000k	804	>93	150	0,6	1/3	23008WPN.05.30F	23008WPN.05.31F	23008WPN.05.32F	23008WPN.05.35F
9w	3000k	1335	>93	250	0,6	1/3	23008WPN.09.30F	23008WPN.09.31F	23008WPN.09.32F	23008WPN.09.35F
13w	3000k	1851	>93	350	0,6	1/3	23008WPN.13.30F	23008WPN.13.31F	23008WPN.13.32F	23008WPN.13.35F
19w	3000k	2605	>93	500	0,6	1/3	23008WPN.19.30F	23008WPN.19.31F	23008WPN.19.32F	23008WPN.19.35F
5w	4000k	804	>93	150	0,6	1/3	23008WPN.05.40F	23008WPN.05.41F	23008WPN.05.42F	23008WPN.05.45F
9w	4000k	1335	>93	250	0,6	1/3	23008WPN.09.40F	23008WPN.09.41F	23008WPN.09.42F	23008WPN.09.45F
13w	4000k	1851	>93	350	0,6	1/3	23008WPN.13.40F	23008WPN.13.41F	23008WPN.13.42F	23008WPN.13.45F
19w	4000k	2605	>93	500	0,6	1/3	23008WPN.19.40F	23008WPN.19.41F	23008WPN.19.42F	23008WPN.19.45F

* Lichtstroom van armatuur, tolerantie van +/- 10%

* *Luminaire luminous flux, tolerance of +/- 10%*






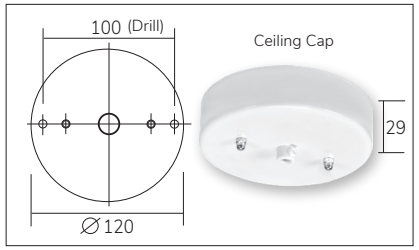



Opties:
- Vlees, Brood of Crisp white
- 2700k of 3500k

Opties:
- Meat, Bread or Crisp white
- 2700k or 3500k



23008WPN.05.30F
5w 3000k 804lm
ηLB 100%

melis lighting