

Marici 130-140 DARKLIGHT SUSPENDED


Ronde LED pendel downlight. Voorzien van trompetvormige darklight reflector van 99,98% hoogglans aluminium met medium bundel (>50°) en hoge efficiency (max 158lm/w) met **CRI>93**. Zeer lage verblinding (UGR<19) en minimale helderheid door uniek darklight reflector ontwerp. Wit gelakte (RAL 9003) stalen behuizing. Wordt geleverd inclusief interne driver en 3 meter snoer. Directe aansluiting op 220-240VAC. Onderhoudsarm en hoge levensduurverwachting. Hoge kleurconsistentie SDCM <2. Vijf jaar garantie.

Round suspended LED downlight. Trumpet shaped darklight reflector made of 99,98% specular aluminium with medium beam angle (>50°) and high efficiency (max 158lm/w) with **CRI>93**. Very low glare (UGR<19) and minimal brightness due to unique darklight reflector design. White painted steel body (RAL9003). Delivered including internal driver and 3 meter cable. Direct connection to 220-240VAC. Low maintenance and high life expectancy. High color consistency SDCM <2. Five years warranty.

Wattage Watts	Kleur Colour	Lumen* Lumen*	CRI CRI	Amperage (mA) Amperage (mA)	kg kg	Noodvoorz. (u) Emergency (h)	Artikel nr. Article no.	Dimbaar (1-10V) Dimmable (1-10V)	Dali-2 Dali-2	Casambi Casambi
5w	3000k	759	>93	150	1,4	1/3	23007WPN.05.30	23007WPN.05.31	23007WPN.05.32	23007WPN.05.35
9w	3000k	1208	>93	250	1,4	1/3	23007WPN.09.30	23007WPN.09.31	23007WPN.09.32	23007WPN.09.35
13w	3000k	1628	>93	350	1,4	1/3	23007WPN.13.30	23007WPN.13.31	23007WPN.13.32	23007WPN.13.35
19w	3000k	2344	>93	500	1,4	1/3	23007WPN.19.30	23007WPN.19.31	23007WPN.19.32	23007WPN.19.35
5w	4000k	759	>93	150	1,4	1/3	23007WPN.05.40	23007WPN.05.41	23007WPN.05.42	23007WPN.05.45
9w	4000k	1208	>93	250	1,4	1/3	23007WPN.09.40	23007WPN.09.41	23007WPN.09.42	23007WPN.09.45
13w	4000k	1628	>93	350	1,4	1/3	23007WPN.13.40	23007WPN.13.41	23007WPN.13.42	23007WPN.13.45
19w	4000k	2344	>93	500	1,4	1/3	23007WPN.19.40	23007WPN.19.41	23007WPN.19.42	23007WPN.19.45

* Lichtstroom van armatuur, tolerantie van +/- 10%

* Luminaire luminous flux, tolerance of +/- 10%

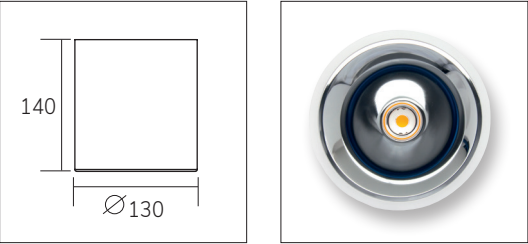


PENDEL ARMATUREN SUSPENDED LUMINAIRES



- Opties:**
- Vlees, Brood of Crisp white (2700k of 3500k)
 - 90CRI of 97CRI

- Opties:**
- Meat, Bread or Crisp white (2700k or 3500k)
 - 90CRI or 97CRI

Levensduurverwachting (uren) Life expectancy (hours)	
Watt	L90B10
5	73.000
9	70.000
13	60.000
19	53.000



23007WPN.05.30
5w 3000k 759lm
ηLB 100%