Marici 130-140 DARKLIGHT SUSPENDED

Ronde LED pendel downlight. Voorzien van trompetvormige darklight reflector van 99,98% hoogglans aluminium met medium bundel (>50°) en hoge efficiency (max 158lm/w) met **CRI>93 (R9>83)**. Zeer lage verblinding (UGR<19) en minimale helderheid door uniek darklight reflector ontwerp. Wit gelakte (RAL 9003) stalen behuizing. Wordt geleverd inclusief interne driver en 3 meter snoer. Directe aansluiting op 220-240VAC. Onderhoudsarm en hoge levensduurverwachting (L90B10 180.000 uur). Hoge kleurconsistentie SDCM <2. Vijf jaar garantie.

Round suspended LED downlight. Trumpet shaped darklight reflector made of 99,98% specular aluminium with medium beam angle (>50°) and high efficiency (max 158lm/w) with **CRI>93 (R9>83)**. *Very low glare (UGR<19) and minimal brightness due to unique darklight reflector design. White painted steel body (RAL9003). Delivered including internal driver and 3 meter cable. Direct connection to 220-240VAC. Low maintenance and high life expectancy (L90B10 180.000 hours). High color consistency SDCM <2. Five years warranty.*

Wattage Watts	**Kleur** Colour	**Lumen*** Lumen*	**CRI** CRI	**Amperage (mA)** Amperage (mA)	**kg** kg	**Artikel nr.** Article no.	**Dimbaar (1-10V)** Dimmable (1-10V)	**Dali-2** Dali-2	**Casambi** Casambi
5w	3000k	759	>93	150	1,4	23007WPN.05.30	23007WPN.05.31	23007WPN.05.32	23007WPN.05.35
9w	3000k	1208	>93	250	1,4	23007WPN.09.30	23007WPN.09.31	23007WPN.09.32	23007WPN.09.35
13w	3000k	1628	>93	350	1,4	23007WPN.13.30	23007WPN.13.31	23007WPN.13.32	23007WPN.13.35
19w	3000k	2344	>93	500	1,4	23007WPN.19.30	23007WPN.19.31	23007WPN.19.32	23007WPN.19.35
5w	4000k	759	>93	150	1,4	23007WPN.05.40	23007WPN.05.41	23007WPN.05.42	23007WPN.05.45
9w	4000k	1208	>93	250	1,4	23007WPN.09.40	23007WPN.09.41	23007WPN.09.42	23007WPN.09.45
13w	4000k	1628	>93	350	1,4	23007WPN.13.40	23007WPN.13.41	23007WPN.13.42	23007WPN.13.45
19w	4000k	2344	>93	500	1,4	23007WPN.19.40	23007WPN.19.41	23007WPN.19.42	23007WPN.19.45

* Lichtstroom van armatuur, tolerantie van +/- 10%

* *Luminaire luminous flux, tolerance of +/- 10%*





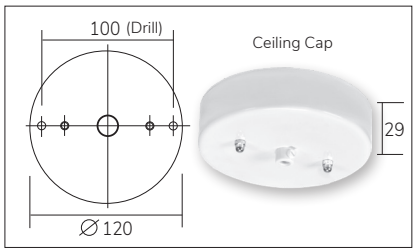



Opties:
- Vlees, Brood of Crisp white (2700k of 3500k)
- 90CRI of 97CRI

Opties:
- *Meat, Bread or Crisp white (2700k or 3500k)*
- *90CRI or 97CRI*



23007WPN.05.30
5w 3000k 759lm
ηLB 100%

melis lighting