

Marici 130-140 MATT SUSPENDED




Ronde LED pendel downlight. Voorzien van decoratieve aluminium (99,9%) matte reflector (UGR<21). Gesatineerde PS Microprisma afscherming voor extra comfort. Brede bundel (>73,0°) en hoge efficiency (max 117lm/w) met **CRI>93**. Wit gelakte (RAL 9003) stalen behuizing. Wordt geleverd inclusief interne driver. Directe aansluiting op netspanning. Zeer geschikt als basis verlichting in gangen, kantoren, vides, kerken en moskeeën. Inclusief 3 meter snoer. Snelle en eenvoudige montage. Onderhoudsarm en hoge levensduurverwachting. Hoge kleurconsistentie SDCM <2. Vijf jaar garantie.

Round suspended LED downlight. High gloss aluminium reflector (99,9%) with matt finish (UGR<21). Wide beam angle (>77,0°) and high efficiency (max 117lm/w) with **CRI>93**. Satinated PS Microprism diffuser for high comfort. White painted steel body (RAL9003). Direct connection to mains. Very suitable as general lighting in hallways, offices, high rooms like lobby's, churches and mosques. Including 3 meter cable. Low maintenance and high life expectancy. High color consistency SDCM <2. Fast and easy mounting. Five years warranty.

Wattage Watts	Kleur Colour	Lumen* Lumen*	CRI CRI	Amperage (mA) Amperage (mA)	kg kg	Noodvoorz. (u) Emergency (h)	Artikel nr. Article no.	Dimbaar (1-10V) Dimmable (1-10V)	Dali-2 Dali-2	Casambi Casambi
5w	3000k	565	>93	140	1,4	1/3	23008WPN.05.30M	23008WPN.05.31M	23008WPN.05.32M	23008WPN.05.35M
9w	3000k	938	>93	250	1,4	1/3	23008WPN.09.30M	23008WPN.09.31M	23008WPN.09.32M	23008WPN.09.35M
13w	3000k	1301	>93	350	1,4	1/3	23008WPN.13.30M	23008WPN.13.31M	23008WPN.13.32M	23008WPN.13.35M
19w	3000k	1830	>93	500	1,4	1/3	23008WPN.19.30M	23008WPN.19.31M	23008WPN.19.32M	23008WPN.19.35M
5w	4000k	565	>93	140	1,4	1/3	23008WPN.05.40M	23008WPN.05.41M	23008WPN.05.42M	23008WPN.05.45M
9w	4000k	938	>93	250	1,4	1/3	23008WPN.09.40M	23008WPN.09.41M	23008WPN.09.42M	23008WPN.09.45M
13w	4000k	1301	>93	350	1,4	1/3	23008WPN.13.40M	23008WPN.13.41M	23008WPN.13.42M	23008WPN.13.45M
19w	4000k	1830	>93	500	1,4	1/3	23008WPN.19.40M	23008WPN.19.41M	23008WPN.19.42M	23008WPN.19.45M

* Lichtstroom van armatuur, tolerantie van +/- 10%

* Luminaire luminous flux, tolerance of +/- 10%

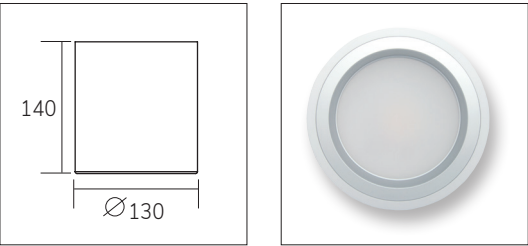


PENDEL ARMATUREN SUSPENDED LUMINAIRES



- Opties:**
- Vlees, Brood of Crisp white
 - 2700k of 3500k

- Opties:**
- Meat, Bread or Crisp white
 - 2700k or 3500k

Levensduurverwachting (uren) Life expectancy (hours)	
Watt	L90B10
5	73.000
9	70.000
13	60.000
19	53.000



23008WPN.05.30M
5w 3000k 565lm
ηLB 100%