Marici 130-140 MATT SUSPENDED

Ronde LED pendel downlight. Voorzien van decoratieve aluminium (99,9%) matte reflector (UGR<21). Gesatineerde PS Microprisma afscherming voor extra comfort. Brede bundel (>73,0°) en hoge efficiency (max 117lm/w) met **CRI>93 (R9>83)**. Wit gelakte (RAL 9003) stalen behuizing. Wordt geleverd inclusief interne driver. Directe aansluiting op netspanning. Zeer geschikt als basis verlichting in gangen, kantoren, vides, kerken en moskeeën. Inclusief 3 meter snoer. Snelle en eenvoudige montage. Onderhoudsarm en hoge levensduurverwachting (L90B10 180.000 uur). Hoge kleurconsistentie SDCM <2. Vijf jaar garantie.

Round suspended LED downlight. High gloss aluminium reflector (99,9%) with matt finish (UGR<21). Wide beam angle (>77,0°) and high efficiency (max 117lm/w) with **CRI>93 (R9>83)**. *Satinated PS Microprism diffuser for high comfort. White painted steel body (RAL9003). Direct connection to mains. Very suitable as general lighting in hallways, offices, high rooms like lobby's, churches and mosques. Including 3 meter cable. Low maintenance and high life expectancy (L90B10 180.000 hours). High color consistency SDCM <2. Five years warranty.*



Wattage Watts	**Kleur** Colour	**Lumen*** Lumen*	**CRI** CRI	**Amperage (mA)** Amperage (mA)	**kg** kg	**Artikel nr.** Article no.	**Dimbaar (1-10V)** Dimmable (1-10V)	**Dali-2** Dali-2	**Casambi** Casambi
5w	3000k	565	>93	150	1,4	23008WPN.05.30M	23008WPN.05.31M	23008WPN.05.32M	23008WPN.05.35M
9w	3000k	938	>93	250	1,4	23008WPN.09.30M	23008WPN.09.31M	23008WPN.09.32M	23008WPN.09.35M
13w	3000k	1301	>93	350	1,4	23008WPN.13.30M	23008WPN.13.31M	23008WPN.13.32M	23008WPN.13.35M
19w	3000k	1830	>93	500	1,4	23008WPN.19.30M	23008WPN.19.31M	23008WPN.19.32M	23008WPN.19.35M
5w	4000k	565	>93	150	1,4	23008WPN.05.40M	23008WPN.05.41M	23008WPN.05.42M	23008WPN.05.45M
9w	4000k	938	>93	250	1,4	23008WPN.09.40M	23008WPN.09.41M	23008WPN.09.42M	23008WPN.09.45M
13w	4000k	1301	>93	350	1,4	23008WPN.13.40M	23008WPN.13.41M	23008WPN.13.42M	23008WPN.13.45M
19w	4000k	1830	>93	500	1,4	23008WPN.19.40M	23008WPN.19.41M	23008WPN.19.42M	23008WPN.19.45M

* Lichtstroom van armatuur, tolerantie van +/- 10%

* *Luminaire luminous flux, tolerance of +/- 10%*





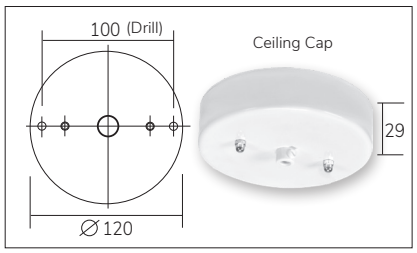

Opties:
- Vlees, Brood of Crisp white
- 2700k of 3500k

Opties:
- *Meat, Bread or Crisp white*
- *2700k or 3500k*



23008WPN.05.30M
5w 3000k 565lm
ηLB 100%

melis lighting