

Marici 130-140 White Track


Ronde LED downlight met adapter voor 3-fase rail systemen. Voorzien van decoratieve aluminium (99,9%) wit gelakte reflector met brede uitstraling >66°, (UGR<21) en hoge efficiency (max 117lm/w) met **CRI>93 (R9>83)**. Gesatineerde PS Microprisma afscherming voor extra comfort. Zeer geschikt als basis verlichting in gangen of kantoren. Wit gelakte (RAL 9003) stalen behuizing. Wordt geleverd inclusief interne driver. Directe aansluiting op 220-240VAC. Onderhoudsarm en hoge levensduurverwachting. Hoge kleurconsistentie SDCM <2. Vijf jaar garantie.

Round LED downlight with adapter for 3-phase track systems. White painted aluminium reflector (99,9%) with wide beam angle >66°, (UGR<21) and high efficiency (max 117lm/w) with **CRI>93 (R9>83)**. Satinated PS Microprism diffuser for high comfort. White painted steel body (RAL9003). Very suitable as general lighting in hallways and offices. Delivered including internal driver. Direct connection to 220-240VAC. Low maintenance and high life expectancy. High color consistency SDCM <2. Five years warranty.

Wattage Watts	Kleur Colour	Lumen* Lumen*	CRI CRI	Amperage (mA) Amperage (mA)	kg kg	Artikel nr. Article no.	Dimbaar (1-10V) Dimmable (1-10V)	Dali-2 Dali-2	Casambi Casambi
5w	3000k	569	>93	150	1,2	23008WT.05.30W	23008WT.05.31W	23008WT.05.32W	23008WT.05.35W
9w	3000k	945	>93	250	1,2	23008WT.09.30W	23008WT.09.31W	23008WT.09.32W	23008WT.09.35W
13w	3000k	1310	>93	350	1,2	23008WT.13.30W	23008WT.13.31W	23008WT.13.32W	23008WT.13.35W
19w	3000k	1843	>93	500	1,2	23008WT.19.30W	23008WT.19.31W	23008WT.19.32W	23008WT.19.35W
5w	4000k	569	>93	150	1,2	23008WT.05.40W	23008WT.05.41W	23008WT.05.42W	23008WT.05.45W
9w	4000k	945	>93	250	1,2	23008WT.09.40W	23008WT.09.41W	23008WT.09.42W	23008WT.09.45W
13w	4000k	1310	>93	350	1,2	23008WT.13.40W	23008WT.13.41W	23008WT.13.42W	23008WT.13.45W
19w	4000k	1843	>93	500	1,2	23008WT.19.40W	23008WT.19.41W	23008WT.19.42W	23008WT.19.45W

* Lichtstroom van armatuur, tolerantie van +/- 10%

* Luminaire luminous flux, tolerance of +/- 10%

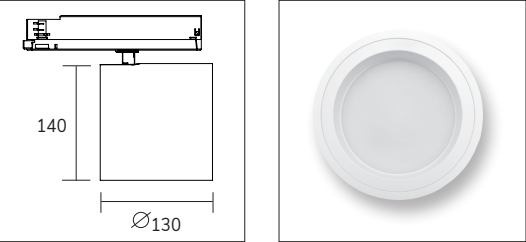

TRACK SYSTEEM TRACK SYSTEM



Accessoires:

- 3-fase rails en connectors

Opties:

- Vlees, Brood of Crisp white
(2700k, 3000k of 3500k)


Accessories:

- 3-phase tracks and connectors

Opties:

- Meat, Bread or Crisp white
(2700k, 3000k or 3500k)

Levensduurverwachting (uren) Life expectancy (hours)	
Watt	L90B10
5	73.000
9	70.000
13	60.000
19	53.000



23008WT.05.30W
5w 569lm 3000K
ηLB 100%