

Marici 130-140 White

Ronde LED opbouw downlight. Voorzien van decoratieve aluminium (99,9%) wit gelakte reflector (UGR<21) met brede uitstraling >66°, en hoge efficiency (max 117lm/w) met **CRI>93**. Gesatineerde PS Microprisma afscherming voor extra comfort. Zeer geschikt als basis verlichting in gangen of kantoren. Wit gelakte (RAL 9003) stalen behuizing. Wordt geleverd inclusief interne driver met mogelijkheid tot doorlussen. Directe aansluiting op 220-240VAC. Onderhoudsarm en hoge levensduurverwachting. Hoge kleurconsistentie SDCM <2. Vijf jaar garantie.




Round surface mounted LED downlight. White painted aluminium reflector (99,9%) with wide beam angle >66°, (UGR<21) and high efficiency (max 117lm/w) with **CRI>93**. Satinated PS Microprism diffuser for high comfort. White painted steel body (RAL9003). Very suitable as general lighting in hallways and offices. Delivered including internal driver with possibility for through-wiring. Direct connection to 220-240VAC. Low maintenance and high life expectancy. High color consistency SDCM <2. Five years warranty.

Wattage Watts	Kleur Colour	Lumen* Lumen*	CRI CRI	Amperage (mA) Amperage (mA)	kg kg	Noodvoorz. (u) Emergency (h)	Artikel nr. Article no.	Dimbaar (1-10V) Dimmable (1-10V)	Dali-2 Dali-2	Casambi Casambi
5w	3000k	569	>93	140	1,2	1/3	23008WPB.05.30W	23008WPB.05.31W	23008WPB.05.32W	23008WPB.05.35W
9w	3000k	945	>93	250	1,2	1/3	23008WPB.09.30W	23008WPB.09.31W	23008WPB.09.32W	23008WPB.09.35W
13w	3000k	1310	>93	350	1,2	1/3	23008WPB.13.30W	23008WPB.13.31W	23008WPB.13.32W	23008WPB.13.35W
19w	3000k	1843	>93	500	1,2	1/3	23008WPB.19.30W	23008WPB.19.31W	23008WPB.19.32W	23008WPB.19.35W
5w	4000k	569	>93	140	1,2	1/3	23008WPB.05.40W	23008WPB.05.41W	23008WPB.05.42W	23008WPB.05.45W
9w	4000k	945	>93	250	1,2	1/3	23008WPB.09.40W	23008WPB.09.41W	23008WPB.09.42W	23008WPB.09.45W
13w	4000k	1310	>93	350	1,2	1/3	23008WPB.13.40W	23008WPB.13.41W	23008WPB.13.42W	23008WPB.13.45W
19w	4000k	1843	>93	500	1,2	1/3	23008WPB.19.40W	23008WPB.19.41W	23008WPB.19.42W	23008WPB.19.45W

* Lichtstroom van armatuur, tolerantie van +/- 10%

* Luminaire luminous flux, tolerance of +/- 10%

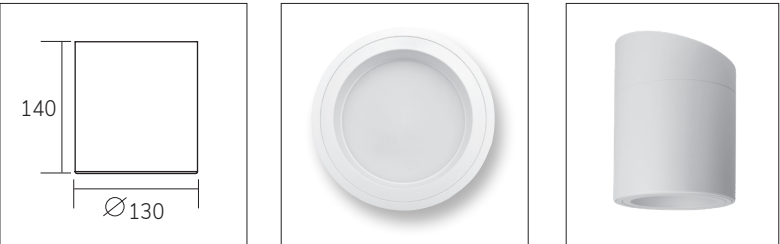

OPBOUW DOWNLIGHTS

SURFACE MOUNTED DOWNLIGHTS




Opties:

- Vlees, Brood of Crisp white (2700k of 3500k)
- Schuinstelling voor aflopende plafonds op aanvraag
- Andere RAL kleur

Opties:

- Meat, Bread or Crisp white (2700k or 3500k)
- Diagonal attachment for sloped ceilings on request
- Different RAL Colour

Levensduurverwachting (uren) Life expectancy (hours)	
Watt	L90B10
5	73.000
9	70.000
13	60.000
19	53.000



23008WPB.05.30W

5w 3000k 569lm
ηLB 100%