Marici 150 Darklight


Ronde LED downlight met extreem hoog rendement tot 170 lm/w en een lage inbouw-hoogte. Voorzien van trompetvormige darklight reflector van 99,98% hoogglans aluminium met brede bundel (>70°) **CRI>93 (R9>88)**. Zeer lage verblinding (UGR<19, 5-18w) en minimale helderheid door uniek darklight reflector ontwerp. Wit gelakte (RAL 9003) aluminium behuizing. Snelle montage met veren. Wordt geleverd inclusief externe driver. Directe aansluiting op 220-240VAC. Snelle en eenvoudige montage met veren. Onderhoudsarm en hoge levensduurverwachting (L90B10 180.000 uur). Hoge kleurconsistentie SDCM <2. Vijf jaar garantie.

Round LED downlight with extremely high efficiency up to 170 lm/w and shallow build-in height. Trumpet shaped darklight reflector made of 99,98% specular aluminum with wide beam angle (>70°) **CRI>93 (R9>88)**. *Very low glare (UGR<19, 5-18w) and minimal brightness due to unique darklight reflector design. White painted die cast aluminium body (RAL9003). Delivered including external driver. Direct connection to 220-240VAC. Fast and easy mounting with springs. Low maintenance and high life expectancy (L90B10 180.000 hours). High color consistency SDCM <2. Five years warranty.*


Wattage *Watts*	**Kleur** *Colour*	**Lumen*** *Lumen**	**CRI** *CRI*	**Amperage (mA)** *Amperage (mA)*	**Gewicht (kg)** *Weight (kg)*	**Noodvoorz. (u)** *Emergency (h)*	**Artikel nr.** *Article no.*	**Dimbaar (1-10V)** *Dimmable (1-10V)*	**Dali-2** *Dali-2*	**Casambi** *Casambi*
5w	3000k	823	>93	150	0,75	1/3	23006W.05.30	23006W.05.31	23006W.05.32	23006W.05.35
9w	3000k	1366	>93	250	0,75	1/3	23006W.09.30	23006W.09.31	23006W.09.32	23006W.09.35
12w	3000k	1895	>93	350	0,75	1/3	23006W.12.30	23006W.12.31	23006W.12.32	23006W.12.35
18w	3000k	2663	>93	500	0,75	1/3	23006W.18.30	23006W.18.31	23006W.18.32	23006W.18.35
26w	3000k	3635	>93	700	0,75	1/3	23006W.26.30	23006W.26.31	23006W.26.32	23006W.26.35
34w	3000k	4552	>93	900	0,75	1/3	23006W.34.30	23006W.34.31	23006W.34.32	23006W.34.35
5w	4000k	823	>93	150	0,75	1/3	23006W.05.40	23006W.05.41	23006W.05.42	23006W.05.45
9w	4000k	1366	>93	250	0,75	1/3	23006W.09.40	23006W.09.41	23006W.09.42	23006W.09.45
12w	4000k	1895	>93	350	0,75	1/3	23006W.12.40	23006W.12.41	23006W.12.42	23006W.12.45
18w	4000k	2663	>93	500	0,75	1/3	23006W.18.40	23006W.18.41	23006W.18.42	23006W.18.45
26w	4000k	3635	>93	700	0,75	1/3	23006W.26.40	23006W.26.41	23006W.26.42	23006W.26.45
34w	4000k	4552	>93	900	0,75	1/3	23006W.34.40	23006W.34.41	23006W.34.42	23006W.34.45


* Lichtstroom van armatuur, tolerantie van +/- 10%

* *Luminaire luminous flux, tolerance of +/- 10%*





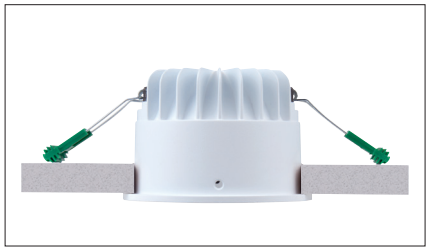

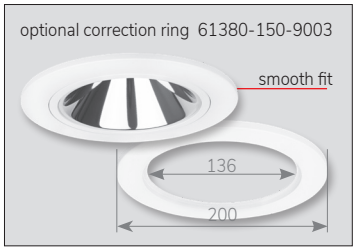






Opties:
- 1,5 meter snoer met 3-polige Shuko stekker
- 0,5 meter snoer + GST18i3® connector (niet - dimbaar)
- 0,5 meter snoer + GST18i3® and BST14i2 connector (dim)
- 0,5 meter snoer + GST18i5® Blue connector male (dim)
- Andere RAL kleur
- 2700K, 3500k, 5000k of hogere CRI waarde 90/97
- Vlees, brood of Crisp White

Options:
- *1,5m cable with Shuko 3-pin plug*
- *0,5 meter cable + GST18i3® connector (non - dimmable)*
- *0,5 meter cable + GST18i3® and BST14i2 connector (dim)*
- *0,5 meter cable + GST18i5® Blue connector male (dim)*
- *Different RAL color*
- *2700k, 3500k, 5000k or higher CRI values 90/97*
- *Meat, bread or Crisp White*



23006W.05.30
5w 3000k 823lm
ηLB 100%

melis lighting