

Marici 150 Matt Oval Lens

PF>0,95



IP44-65







Ronde LED downlight met een lage inbouwhoogte (91mm). Voorzien van decoratieve aluminium (99,9%) matte reflector (UGR<22) met brede uitstraling (>77°) en hoge efficiency (max 125lm/w) met CRI>80. Gesatineerde PS Microprisma afscherming voor extra comfort. Wit gelakte (RAL 9003) aluminium behuizing. Wordt geleverd inclusief externe driver. Snelle en eenvoudige montage met veren. Directe aansluiting op 220-240VAC. Zeer geschikt als basis verlichting in gangen. Onderhoudsarm en hoge levensduurverwachting. Kleur stabiliteit, Mac Adam <3. Vijf jaar garantie.

Round LED downlight with shallow build-in height (91mm). Matt aluminium reflector (99,9%), (UGR<22) with wide beam angle (>77°) and high efficiency (max 125lm/w) with CRI>80. Satinated PS Microprism diffuser for high comfort. White painted die cast aluminum body (RAL9003). Delivered including external driver. Direct connection to 220-240VAC. Ideal for use in corridors. Low maintenance and high life expectancy. Colour stability, Mac Adam <3. Fast and easy mounting with springs. Five years warranty.

Wattage Watts	Kleur Colour	Lumen* Lumen*	Amperage (mA) Amperage (mA)	kg	Noodvoorz. (u) Emergency (h)	Artikel nr. Article no.	Dimbaar (1-10V) Dimmable (1-10V)	Dali Dali	Casambi Casambi
5w	3000k	630	150	0,75	1/3	23013W.05.30.O	23013W.05.31.O	23013W.05.32.O	23013W.05.35.O
9w	3000k	1050	250	0,75	1/3	23013W.09.30.O	23013W.09.31.O	23013W.09.32.O	23013W.09.35.O
12w	3000k	1470	350	0,75	1/3	23013W.12.30.O	23013W.12.31.O	23013W.12.32.O	23013W.12.35.O
18w	3000k	2100	500	0,75	1/3	23013W.18.30.O	23013W.18.31.O	23013W.18.32.O	23013W.18.35.O
25w	3000k	2940	700	0,75	1/3	23013W.25.30.O	23013W.25.31.O	23013W.25.32.O	23013W.25.35.O
33w	3000k	3780	900	0,75	1/3	23013W.33.30.O	23013W.33.31.O	23013W.33.32.O	23013W.33.35.O
5w	4000k	662	150	0,75	1/3	23013W.05.40.O	23013W.05.41.O	23013W.05.42.O	23013W.05.45.O
9w	4000k	1103	250	0,75	1/3	23013W.09.40.O	23013W.09.41.O	23013W.09.42.O	23013W.09.45.O
12w	4000k	1544	350	0,75	1/3	23013W.12.40.O	23013W.12.41.O	23013W.12.42.O	23013W.12.45.O
18w	4000k	2205	500	0,75	1/3	23013W.18.40.O	23013W.18.41.O	23013W.18.42.O	23013W.18.45.O
25w	4000k	3087	700	0,75	1/3	23013W.25.40.O	23013W.25.41.O	23013W.25.42.O	23013W.25.45.O
33w	4000k	3969	900	0,75	1/3	23013W.33.40.O	23013W.33.41.O	23013W.33.42.O	23013W.33.45.O

* Lichtstroom van armatuur, tolerantie van +/- 10%

* Luminaire luminous flux, tolerance of +/- 10%

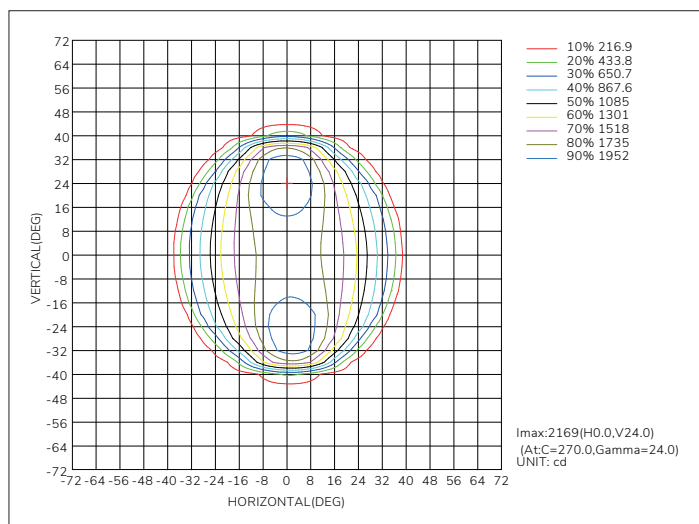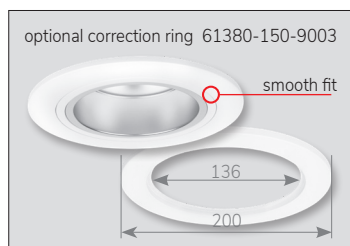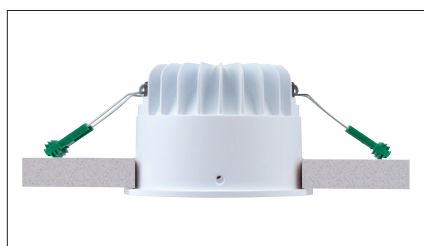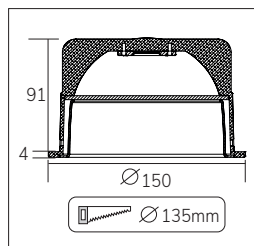

INBOUW DOWNLIGHTS RECESSED DOWNLIGHTS



Opties:


- 1,5 meter snoer met 3-polige Shuko stekker
- 0,5 meter snoer + GST18i3® connector (niet - dimbaar)
- 0,5 meter snoer + GST18i3® and BST14i2 connector (dim)
- 0,5 meter snoer + GST18i5® Blue connector male (dim)
- Andere RAL kleur
- 2700K, 3500k, 5000k of hogere CRI waarde 90/97
- Vlees, brood of Crisp White
- IP65

Options:

- 1,5m cable with Shuko 3-pin plug
- 0,5 meter cable + GST18i3® connector (non - dimmable)
- 0,5 meter cable + GST18i3® and BST14i2 connector (dim)
- 0,5 meter cable + GST18i5® Blue connector male (dim)
- Different RAL color
- 2700k, 3500k, 5000k or higher CRI values 90/97
- Meat, bread or Crisp White
- IP65



optional dust cover 61396-150



23013W.05.30.O

5w 3000k 630lm
ηLB 74%

melis lighting