

Marici 150 Matt Oval Lens







Ronde LED downlight met een lage inbouwhoogte (91mm). Voorzien van decoratieve aluminium (99,9%) matte reflector (UGR<22) met brede uitstraling (>77°) en hoge efficiency (max 148lm/w) met CRI>93 (R9>83). Gesatineerde PS Microprisma afscherming voor extra comfort. Wit gelakte (RAL 9003) aluminium behuizing. Wordt geleverd inclusief externe driver. Snelle en eenvoudige montage met veren. Directe aansluiting op 220-240VAC. Zeer geschikt als basis verlichting in gangen. Onderhoudsarm en hoge levensduurverwachting. Hoge kleurconsistentie SDCM <2. Vijf jaar garantie.

Round LED downlight with shallow build-in height (91mm). Matt aluminium reflector (99,9%), (UGR<22) with wide beam angle (>77°) and high efficiency (max 148lm/w) with CRI>93 (R9>83). Satinated PS Microprism diffuser for high comfort. White painted die cast aluminum body (RAL9003). Delivered including external driver. Direct connection to 220-240VAC. Ideal for for use in corridors. Low maintenance and high life expectancy. High color consistency SDCM <2. Fast and easy mounting with springs. Five years warranty.

| Wattage<br>Watts | Kleur<br>Colour | Lumen*<br>Lumen* | CRI<br>CRI | Amperage (mA)<br>Amperage (mA) | kg<br>kg | Noodvoorz. (u)<br>Emergency (h) | Artikel nr.<br>Article no. | Dimbaar (1-10V)<br>Dimmable (1-10V) | Dali-2<br>Dali-2 | Casambi<br>Casambi |
|------------------|-----------------|------------------|------------|--------------------------------|----------|---------------------------------|----------------------------|-------------------------------------|------------------|--------------------|
| 5w               | 3000k           | 722              | >93        | 150                            | 0,75     | 1/3                             | 23013W.05.30.O             | 23013W.05.31.O                      | 23013W.05.32.O   | 23013W.05.35.O     |
| 9w               | 3000k           | 1183             | >93        | 250                            | 0,75     | 1/3                             | 23013W.09.30.O             | 23013W.09.31.O                      | 23013W.09.32.O   | 23013W.09.35.O     |
| 13w              | 3000k           | 1622             | >93        | 350                            | 0,75     | 1/3                             | 23013W.13.30.O             | 23013W.13.31.O                      | 23013W.13.32.O   | 23013W.13.35.O     |
| 19w              | 3000k           | 2243             | >93        | 500                            | 0,75     | 1/3                             | 23013W.19.30.O             | 23013W.19.31.O                      | 23013W.19.32.O   | 23013W.19.35.O     |
| 27w              | 3000k           | 2993             | >93        | 700                            | 0,75     | 1/3                             | 23013W.27.30.O             | 23013W.27.31.O                      | 23013W.27.32.O   | 23013W.27.35.O     |
| 5w               | 4000k           | 722              | >93        | 150                            | 0,75     | 1/3                             | 23013W.05.40.O             | 23013W.05.41.O                      | 23013W.05.42.O   | 23013W.05.45.O     |
| 9w               | 4000k           | 1183             | >93        | 250                            | 0,75     | 1/3                             | 23013W.09.40.O             | 23013W.09.41.O                      | 23013W.09.42.O   | 23013W.09.45.O     |
| 13w              | 4000k           | 1622             | >93        | 350                            | 0,75     | 1/3                             | 23013W.13.40.O             | 23013W.13.41.O                      | 23013W.13.42.O   | 23013W.13.45.O     |
| 19w              | 4000k           | 2243             | >93        | 500                            | 0,75     | 1/3                             | 23013W.19.40.O             | 23013W.19.41.O                      | 23013W.19.42.O   | 23013W.19.45.O     |
| 27w              | 4000k           | 2993             | >93        | 700                            | 0,75     | 1/3                             | 23013W.27.40.O             | 23013W.27.41.O                      | 23013W.27.42.O   | 23013W.27.45.O     |

\* Lichtstroom van armatuur, tolerantie van +/- 10%

\* Luminaire luminous flux, tolerance of +/- 10%

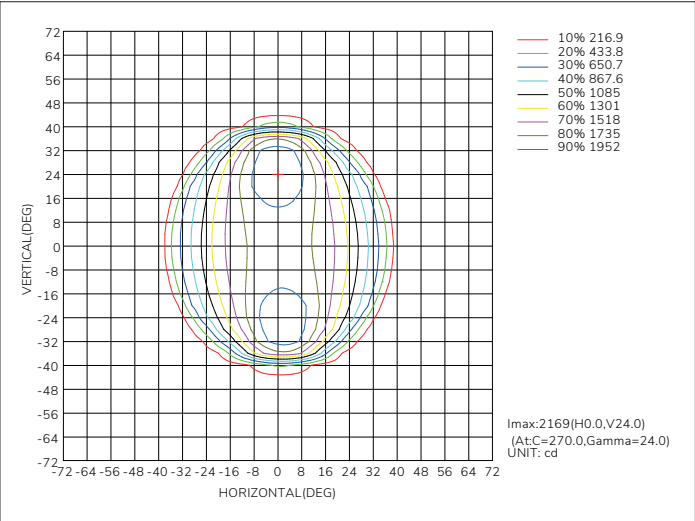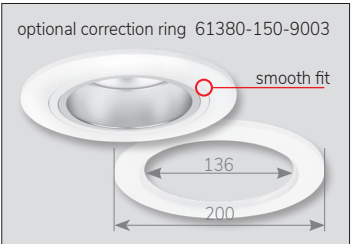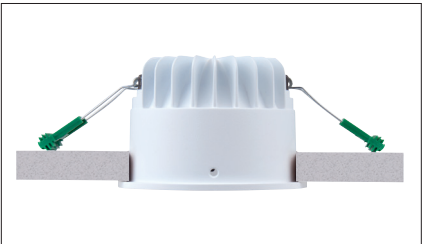

INBOUW DOWNLIGHTS RECESSED DOWNLIGHTS




Opties:

- 1,5 meter snoer met 3-polige Shuko stekker
- 0,5 meter snoer + GST18i3® connector (niet - dimbaar)
- 0,5 meter snoer + GST18i3® and BST14i2 connector (dim)
- 0,5 meter snoer + GST18i5® Blue connector male (dim)
- Andere RAL kleur
- 2700K, 3500k, 5000k of hogere CRI waarde 90/97
- Vlees, brood of Crisp White
- IP65

Options:

- 1,5m cable with Shuko 3-pin plug
- 0,5 meter cable + GST18i3® connector (non - dimmable)
- 0,5 meter cable + GST18i3® and BST14i2 connector (dim)
- 0,5 meter cable + GST18i5® Blue connector male (dim)
- Different RAL color
- 2700k, 3500k, 5000k or higher CRI values 90/97
- Meat, bread or Crisp White
- IP65



23013W.05.30.O  
5w 3000k 722lm  
ηLB 100%

melis lighting