Marici 150 Matt Oval Lens

DALI 2 | PF>0,95 | MAX 50 mm | IP44-65 | RoHS


Ronde LED downlight met een lage inbouwhoogte (91mm). Voorzien van decoratieve aluminium (99,9%) matte reflector (UGR<22) met brede uitstraling (>77°) en hoge efficiency (max 148lm/w) met **CRI>93 (R9>83)**. Gesatineerde PS Microprisma afscherming voor extra comfort. Wit gelakte (RAL 9003) aluminium behuizing. Wordt geleverd inclusief externe driver. Snelle en eenvoudige montage met veren. Directe aansluiting op 220-240VAC. Zeer geschikt als basis verlichting in gangen. Onderhoudsarm en hoge levensduurverwachting (L90B10 180.000 uur). Hoge kleurconsistentie SDCM <2. Vijf jaar garantie.


Round LED downlight with shallow build-in height (91mm). Matt aluminium reflector (99,9%), (UGR<22) with wide beam angle (>77°) and high efficiency (max 148lm/w) with ***CRI>93 (R9>83)****. Satinated PS Microprism diffuser for high comfort. White painted die cast aluminum body (RAL9003). Delivered including external driver. Direct connection to 220-240VAC. Fast and easy mounting with springs. Ideal for for use in corridors. Low maintenance and high life expectancy (L90B10 180.000 hours). High color consistency SDCM <2. Five years warranty.*


Wattage Watts	**Kleur** *Colour*	**Lumen*** *Lumen**	**CRI** *CRI*	**Amperage (mA)** *Amperage (mA)*	**kg** kg	**Noodvoorz. (u)** *Emergency (h)*	**Artikel nr.** *Article no.*	**Dimbaar (1-10V)** *Dimmable (1-10V)*	**Dali-2** *Dali-2*	**Casambi** *Casambi*
5w	3000k	722	>93	150	0,75	1/3	23013W.05.30.O	23013W.05.31.O	23013W.05.32.O	23013W.05.35.O
9w	3000k	1183	>93	250	0,75	1/3	23013W.09.30.O	23013W.09.31.O	23013W.09.32.O	23013W.09.35.O
13w	3000k	1622	>93	350	0,75	1/3	23013W.13.30.O	23013W.13.31.O	23013W.13.32.O	23013W.13.35.O
19w	3000k	2243	>93	500	0,75	1/3	23013W.19.30.O	23013W.19.31.O	23013W.19.32.O	23013W.19.35.O
27w	3000k	2993	>93	700	0,75	1/3	23013W.27.30.O	23013W.27.31.O	23013W.27.32.O	23013W.27.35.O
5w	4000k	722	>93	150	0,75	1/3	23013W.05.40.O	23013W.05.41.O	23013W.05.42.O	23013W.05.45.O
9w	4000k	1183	>93	250	0,75	1/3	23013W.09.40.O	23013W.09.41.O	23013W.09.42.O	23013W.09.45.O
13w	4000k	1622	>93	350	0,75	1/3	23013W.13.40.O	23013W.13.41.O	23013W.13.42.O	23013W.13.45.O
19w	4000k	2243	>93	500	0,75	1/3	23013W.19.40.O	23013W.19.41.O	23013W.19.42.O	23013W.19.45.O
27w	4000k	2993	>93	700	0,75	1/3	23013W.27.40.O	23013W.27.41.O	23013W.27.42.O	23013W.27.45.O


* Lichtstroom van armatuur, tolerantie van +/- 10%

* *Luminaire luminous flux, tolerance of +/- 10%*



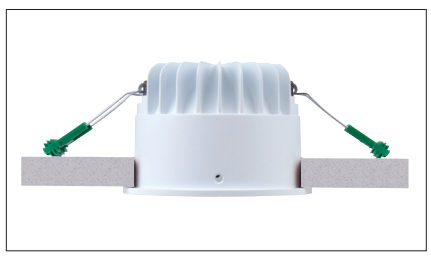

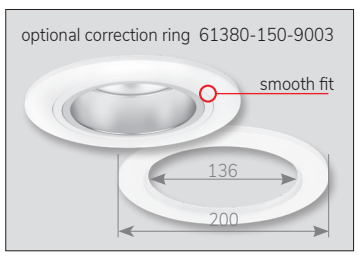

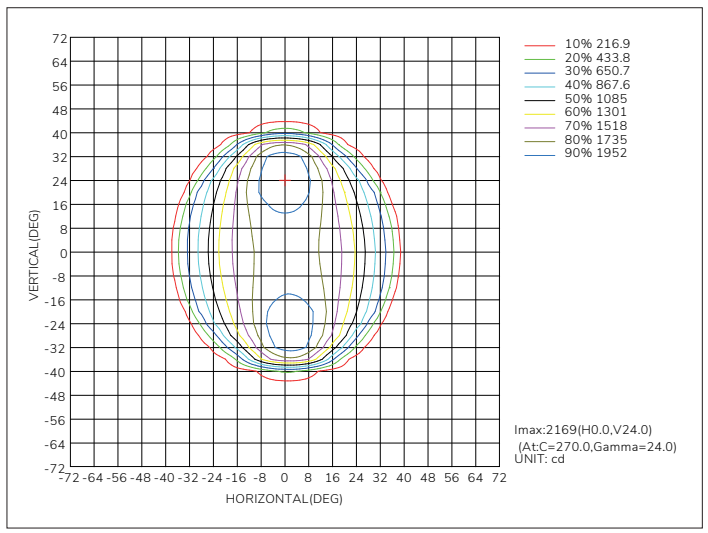




INBOUW DOWNLIGHTS *RECESSED DOWNLIGHTS*



Opties:
- 1,5 meter snoer met 3-polige Shuko stekker
- 0,5 meter snoer + GST18i3® connector (niet - dimbaar)
- 0,5 meter snoer + GST18i3® and BST14i2 connector (dim)
- 0,5 meter snoer + GST18i5® Blue connector male (dim)
- Andere RAL kleur
- 2700K, 3500k, 5000k of hogere CRI waarde 90/97
- Vlees, brood of Crisp White
- IP65

Options:
- *1,5m cable with Shuko 3-pin plug*
- *0,5 meter cable + GST18i3® connector (non - dimmable)*
- *0,5 meter cable + GST18i3® and BST14i2 connector (dim)*
- *0,5 meter cable + GST18i5® Blue connector male (dim)*
- *Different RAL color*
- *2700k, 3500k, 5000k or higher CRI values 90/97*
- *Meat, bread or Crisp White*
- *IP65*





23013W.05.30.O
5w 3000k 722lm
ηLB 100%

melis lighting