Marici 150 Matt

DALI 2 | PF>0,95 | MAX 50 mm | IP44-65 | RoHS


Ronde LED downlight met een lage inbouwhoogte (91mm). Voorzien van decoratieve aluminium (99,9%) matte reflector (UGR<22) met brede uitstraling (>77°) en hoge efficiency (max 126lm/w) met **CRI>93 (R9>83)**. Gesatineerde PS Microprisma afscherming voor extra comfort. Wit gelakte (RAL 9003) aluminium behuizing. Wordt geleverd inclusief externe driver. Snelle en eenvoudige montage met veren. Directe aansluiting op 220-240VAC. Onderhoudsarm en hoge levensduurverwachting (L90B10 180.000 uur). Hoge kleurconsistentie SDCM <2. Vijf jaar garantie.

Round LED downlight with shallow build-in height (91mm). Matt aluminium reflector (99,9%), (UGR<22) with wide beam angle (>77°) and high efficiency (max 126lm/w) with **CRI>93 (R9>83)**. *Satinated PS Microprism diffuser for high comfort. White painted die cast aluminum body (RAL9003). Delivered including external driver. Direct connection to 220-240VAC. Fast and easy mounting with springs. Low maintenance and high life expectancy (L90B10 180.000 hours). High color consistency SDCM <2. Five years warranty.*


Wattage Watts	**Kleur** Colour	**Lumen*** Lumen*	**CRI** **Amperage (mA)** Amperage (mA)	**kg** kg	**Noodvoorz. (u)** Emergency (h)	**Artikel nr.** Article no.	**Dimbaar (1-10V)** Dimmable (1-10V)	**Dali-2** Dali-2	**Casambi** Casambi
5w	3000k	594	>93 150	0,75	1/3	23013W.05.30M	23013W.05.31M	23013W.05.32M	23013W.05.35M
9w	3000k	986	>93 250	0,75	1/3	23013W.09.30M	23013W.09.31M	23013W.09.32M	23013W.09.35M
12w	3000k	1368	>93 350	0,75	1/3	23013W.12.30M	23013W.12.31M	23013W.12.32M	23013W.12.35M
18w	3000k	1924	>93 500	0,75	1/3	23013W.18.30M	23013W.18.31M	23013W.18.32M	23013W.18.35M
26w	3000k	2630	>93 700	0,75	1/3	23013W.26.30M	23013W.26.31M	23013W.26.32M	23013W.26.35M
34w	3000k	3300	>93 900	0,75	1/3	23013W.34.30M	23013W.34.31M	23013W.34.32M	23013W.34.35M
5w	4000k	594	>93 150	0,75	1/3	23013W.05.40M	23013W.05.41M	23013W.05.42M	23013W.05.45M
9w	4000k	986	>93 250	0,75	1/3	23013W.09.40M	23013W.09.41M	23013W.09.42M	23013W.09.45M
12w	4000k	1368	>93 350	0,75	1/3	23013W.12.40M	23013W.12.41M	23013W.12.42M	23013W.12.45M
18w	4000k	1924	>93 500	0,75	1/3	23013W.18.40M	23013W.18.41M	23013W.18.42M	23013W.18.45M
26w	4000k	2630	>93 700	0,75	1/3	23013W.26.40M	23013W.26.41M	23013W.26.42M	23013W.26.45M
34w	4000k	3300	>93 900	0,75	1/3	23013W.34.40M	23013W.34.41M	23013W.34.42M	23013W.34.45M


* Lichtstroom van armatuur, tolerantie van +/- 10%

** Luminaire luminous flux, tolerance of +/- 10%*





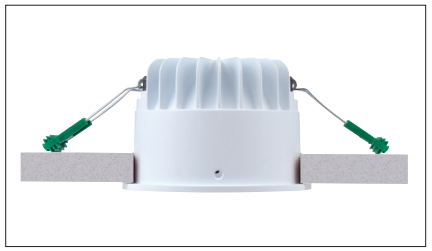


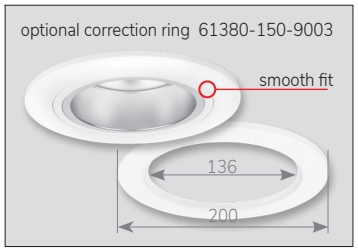




Opties:
- 1,5 meter snoer met 3-polige Shuko stekker
- 0,5 meter snoer + GST18i3® connector (niet - dimbaar)
- 0,5 meter snoer + GST18i3® and BST14i2 connector (dim)
- 0,5 meter snoer + GST18i5® Blue connector male (dim)
- Andere RAL kleur
- 2700K, 3500k, 5000k of hogere CRI waarde 90/97
- Vlees, brood of Crisp White
- IP65

Options:
- *1,5m cable with Shuko 3-pin plug*
- *0,5 meter cable + GST18i3® connector (non - dimmable)*
- *0,5 meter cable + GST18i3® and BST14i2 connector (dim)*
- *0,5 meter cable + GST18i5® Blue connector male (dim)*
- *Different RAL color*
- *2700k, 3500k, 5000k or higher CRI values 90/97*
- *Meat, bread or Crisp White*
- *IP65*

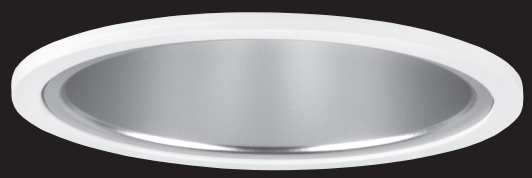



23013W.05.30M
5w 3000k 594lm
ηLB 100%

melis lighting