

Marici 150 Specular TW






Compacte tunable white LED downlight met lage inbouwhoogte en gesatineerde PS Microprisma afscherming voor extra comfort. Brede bundel (>80°) en lage verblinding op maximaal vermogen (UGR<22). Hoogglans aluminium reflector. Tunable white - dynamisch mengen van licht kleur tussen 2700K en 6500K. Wit gelakte (RAL 9003) aluminium behuizing. Zeer geschikt als basis verlichting in scholen, theaters en musea. Wordt geleverd inclusief externe DALI driver. Directe aansluiting op 220-240VAC. Kleurstabiliteit Mac Adam <3. Snelle en eenvoudige montage met veren. Onderhoudsvrij en hoge levensduurverwachting (60.000 uur L90B10). Vijf jaar garantie.

Compact tunable white modular LED downlight with satinated PS Microprism diffuser for high comfort. Wide beam angle (>80°) and low glare at maximum power (UGR<22). Specular aluminum reflector. Tunable white - dynamic mixing of light colour, linear colour mixing between 2700K and 6500K. White painted die cast aluminum body (RAL9003). Very suitable as general lighting in schools, theatres and museums. Delivered including external DALI driver. Direct connection to 220-240VAC. Colour stability, Mac Adam <3. Low maintenance and high life expectancy (60.000 hours L90B10). Fast and easy mounting with springs. Five years warranty.

| Wattage Watts | Kleur Colour | Lumen* Lumen* | CRI CRI | Gewicht (kg) Weight (kg) | Noodvoorz. (u) Emergency (h) | Dali Dali | Casambi Casambi |
|------------------|-----------------|------------------|------------|-----------------------------|---------------------------------|--------------|--------------------|
| 13w | 2700-6500k | 1195-1395 | >92 | 0,75 | 1/3 | 23013W.13.TW | 23013W.13.TWC |
| 19w | 2700-6500k | 1635-1910 | >92 | 0,75 | 1/3 | 23013W.19.TW | 23013W.19.TWC |
| 27w | 2700-6500k | 2310-2720 | >92 | 0,75 | 1/3 | 23013W.27.TW | 23013W.27.TWC |
| 32w | 2700-6500k | 2790-3205 | >92 | 0,75 | 1/3 | 23013W.32.TW | 23013W.32.TWC |

* Lichtstroom van armatuur, tolerantie van +/- 10%

* Luminaire luminous flux, tolerance of +/- 10%

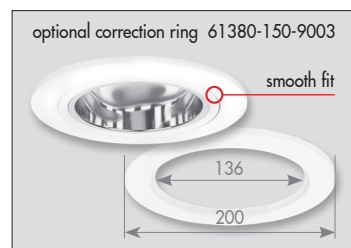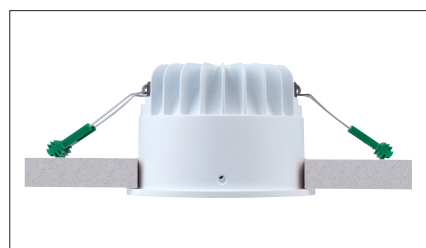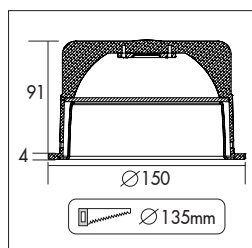


Opties:

- GST18i5® connector
- Andere RAL kleur
- IP65

Options:

- GST18i5® connector
- Different RAL color
- IP65



23013W.13.TW
13w 2700-6500K 1195-1395lm
ηLB 77%

melis lighting