# Marici 160-150 FACET SUSPENDED




Ronde LED pendel downlight. Voorzien van decoratieve aluminium (99,9%) semi hoogglans facet reflector (UGR<19 - <2500lm) met brede uitstraling (>72,2°) en hoge efficiency (max 166lm/w) met **CRI>93 (R9>88)**. Wit gelakte (RAL 9003) stalen behuizing. Wordt geleverd inclusief interne driver. Directe aansluiting op netspanning. Zeer geschikt als basis verlichting in gangen, kantoren, vides, kerken en moskeeën. Inclusief 3 meter snoer. Snelle en eenvoudige montage. Onderhoudsarm en hoge levensduurverwachting (L90B10 180.000 uur). Hoge kleurconsistentie SDCM <2. Vijf jaar garantie.

*Round suspended LED downlight. Semi specular faceted aluminum reflector (99,9%) (UGR<19 - <2500lm) with wide beam angle (>72,2°) and high efficiency (max 166lm/w) with* **CRI>93 (R9>88)**. *White painted steel body (RAL9003). Very suitable as general lighting in hallways, offices, high rooms like lobby's, churches and mosques. Delivered including internal driver and 3 meter cable. Direct connection to mains. Low maintenance and high life expectancy (L90B10 180.000 hours). High color consistency SDCM <2. Five years warranty.*


| **Wattage**<br>Watts | **Kleur**<br>Colour | **Lumen***<br>Lumen* | **CRI**<br>CRI | **Amperage (mA)**<br>Amperage (mA) | **kg**<br>kg | **Noodvoorz. (u)**<br>Emergency (h) | **Artikel nr.**<br>Article no. | **Dimbaar (1-10V)**<br>Dimmable (1-10V) | **Dali-2**<br>Dali-2 | **Casambi**<br>Casambi |
|---|---|---|---|---|---|---|---|---|---|---|
| 5w | 3000k | 828 | >93 | 150 | 1,6 | 1/3 | 23013WPN.05.30F | 23013WPN.05.31F | 23013WPN.05.32F | 23013WPN.05.35F |
| 9w | 3000k | 1374 | >93 | 250 | 1,6 | 1/3 | 23013WPN.09.30F | 23013WPN.09.31F | 23013WPN.09.32F | 23013WPN.09.35F |
| 12w | 3000k | 1906 | >93 | 350 | 1,6 | 1/3 | 23013WPN.12.30F | 23013WPN.12.31F | 23013WPN.12.32F | 23013WPN.12.35F |
| 18w | 3000k | 2682 | >93 | 500 | 1,6 | 1/3 | 23013WPN.18.30F | 23013WPN.18.31F | 23013WPN.18.32F | 23013WPN.18.35F |
| 26w | 3000k | 3667 | >93 | 700 | 1,6 | 1/3 | 23013WPN.26.30F | 23013WPN.26.31F | 23013WPN.26.32F | 23013WPN.26.35F |
| 5w | 4000k | 828 | >93 | 150 | 1,6 | 1/3 | 23013WPN.05.40F | 23013WPN.05.41F | 23013WPN.05.42F | 23013WPN.05.45F |
| 9w | 4000k | 1374 | >93 | 250 | 1,6 | 1/3 | 23013WPN.09.40F | 23013WPN.09.41F | 23013WPN.09.42F | 23013WPN.09.45F |
| 12w | 4000k | 1906 | >93 | 350 | 1,6 | 1/3 | 23013WPN.12.40F | 23013WPN.12.41F | 23013WPN.12.42F | 23013WPN.12.45F |
| 18w | 4000k | 2682 | >93 | 500 | 1,6 | 1/3 | 23013WPN.18.40F | 23013WPN.18.41F | 23013WPN.18.42F | 23013WPN.18.45F |
| 26w | 4000k | 3667 | >93 | 700 | 1,6 | 1/3 | 23013WPN.26.40F | 23013WPN.26.41F | 23013WPN.26.42F | 23013WPN.26.45F |

* Lichtstroom van armatuur, tolerantie van +/- 10%

* *Luminaire luminous flux, tolerance of +/- 10%*






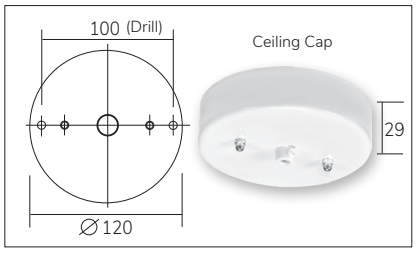


**Opties:**
- Vlees, Brood of Crisp white
- 2700k of 3500k

**Opties:**
- Meat, Bread or Crisp white
- 2700k or 3500k



**23013WPN.05.30F**
5w 3000k 828lm
ηLB 100%

melis lighting