

Marici 160-150 DARKLIGHT SUSPENDED


Ronde LED pendel downlight. Voorzien van trompetvormige darklight reflector van 99,98% hoogglans aluminium met medium bundel (>50°). Zeer lage verblinding (UGR<19, 5-18w) en minimale helderheid door uniek darklight reflector ontwerp. Uitgerust met hoge efficiency (max 170lm/w) met **CRI>93**. Wit (RAL 9003) gelakte stalen behuizing. Wordt geleverd inclusief interne driver. Directe aansluiting op netspanning. Zeer goed toepasbaar in vides, kerken en moskeeën. Inclusief 3 meter snoer. Snelle en eenvoudige montage. Onderhoudsarm en hoge levensduurverwachting. Hoge kleurconsistentie SDCM <2. Vijf jaar garantie.

Round suspended LED downlight. Trumpet shaped darklight reflector made of 99,98% specular aluminium with medium beam angle (>50°). Very low glare (UGR<19, 5-18w) and minimal brightness due to unique darklight reflector design. Equipped with high efficiency (max 170lm/w) with **CRI>93**. White painted steel body (RAL9003). Delivered including internal driver and connector block. Direct connection to mains. Ideal for lighting high rooms like lobby's, churches and mosques. Delivered including 3 meter cable. Low maintenance and high life expectancy. High color consistency SDCM <2. Fast and easy mounting. Five years warranty.

Wattage Watts	Kleur Colour	Lumen* Lumen*	CRI	Amperage (mA) Amperage (mA)	Gewicht (kg) Weight (kg)	Noodvoorz. (u) Emergency (h)	Artikel nr. Article no.	Dimbaar (1-10V) Dimmable (1-10V)	Dali-2 Dali-2	Casambi Casambi
5w	3000k	823	>93	150	1,6	1/3	23006WPN.05.30	23006WPN.05.31	23006WPN.05.32	23006WPN.05.35
9w	3000k	1366	>93	250	1,6	1/3	23006WPN.09.30	23006WPN.09.31	23006WPN.09.32	23006WPN.09.35
12w	3000k	1895	>93	350	1,6	1/3	23006WPN.12.30	23006WPN.12.31	23006WPN.12.32	23006WPN.12.35
18w	3000k	2663	>93	500	1,6	1/3	23006WPN.18.30	23006WPN.18.31	23006WPN.18.32	23006WPN.18.35
26w	3000k	3635	>93	700	1,6	1/3	23006WPN.26.30	23006WPN.26.31	23006WPN.26.32	23006WPN.26.35
5w	4000k	823	>93	150	1,6	1/3	23006WPN.05.40	23006WPN.05.41	23006WPN.05.42	23006WPN.05.45
9w	4000k	1366	>93	250	1,6	1/3	23006WPN.09.40	23006WPN.09.41	23006WPN.09.42	23006WPN.09.45
12w	4000k	1895	>93	350	1,6	1/3	23006WPN.12.40	23006WPN.12.41	23006WPN.12.42	23006WPN.12.45
18w	4000k	2663	>93	500	1,6	1/3	23006WPN.18.40	23006WPN.18.41	23006WPN.18.42	23006WPN.18.45
26w	4000k	3635	>93	700	1,6	1/3	23006WPN.26.40	23006WPN.26.41	23006WPN.26.42	23006WPN.26.45

* Lichtstroom van armatuur, tolerantie van +/- 10%

* Luminaire luminous flux, tolerance of +/- 10%

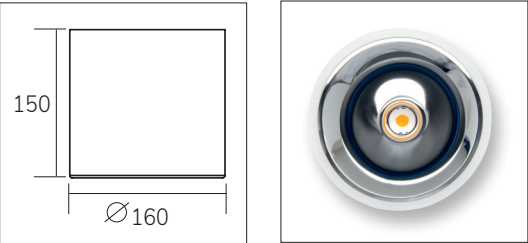


PENDEL ARMATUREN SUSPENDED LUMINAIRES



- Opties:**
- Vlees, Brood of Crisp white
 - 2700k of 3500k

- Opties:**
- Meat, Bread or Crisp white
 - 2700k or 3500k



23006WPN.05.30
5w 3000k 823lm
ηLB 100%