Marici 160-150 MATT SUSPENDED


Ronde LED pendel downlight. Voorzien van decoratieve aluminium (99,9%) matte reflector (UGR<22). Gesatineerde PS Microprisma afscherming voor extra comfort. Zeer brede bundel (>77,0°) en hoge efficiency (max 125lm/w) met **CRI>93 (R9>83)**. Wit gelakte (RAL 9003) stalen behuizing. Wordt geleverd inclusief interne driver. Directe aansluiting op netspanning. Zeer geschikt als basis verlichting in gangen, kantoren, vides, kerken en moskeeën. Inclusief 3 meter snoer. Snelle en eenvoudige montage. Onderhoudsarm en hoge levensduurverwachting (L90B10 180.000 uur). Hoge kleurconsistentie SDCM <2. Vijf jaar garantie.

Round suspended LED downlight. High gloss aluminium reflector (99,9%) with matt finish (UGR<22). Extra wide beam angle (>77,0°) and high efficiency (max 125lm/w) with **CRI>93 (R9>83)**. *Satinated PS Microprism diffuser for high comfort. White painted steel body (RAL9003). Direct connection to mains. Very suitable as general lighting in hallways, offices, high rooms like lobby's, churches and mosques. Including 3 meter cable. Low maintenance and high life expectancy (L90B10 180.000 hours). High color consistency SDCM <2. Five years warranty.*


Wattage Watts	**Kleur** *Colour*	**Lumen*** *Lumen**	**CRI** *CRI*	**Amperage (mA)** *Amperage (mA)*	**kg** kg	**Artikel nr.** *Article no.*	**Dimbaar (1-10V)** *Dimmable (1-10V)*	**Dali-2** *Dali-2*	**Casambi** *Casambi*
5w	3000k	594	>93	150	1,8	23013WPN.05.30M	23013WPN.05.31M	23013WPN.05.32M	23013WPN.05.35M
9w	3000k	986	>93	250	1,8	23013WPN.09.30M	23013WPN.09.31M	23013WPN.09.32M	23013WPN.09.35M
12w	3000k	1368	>93	350	1,8	23013WPN.12.30M	23013WPN.12.31M	23013WPN.12.32M	23013WPN.12.35M
18w	3000k	1924	>93	500	1,8	23013WPN.18.30M	23013WPN.18.31M	23013WPN.18.32M	23013WPN.18.35M
26w	3000k	2630	>93	700	1,8	23013WPN.26.30M	23013WPN.26.31M	23013WPN.26.32M	23013WPN.26.35M
5w	4000k	594	>93	150	1,8	23013WPN.05.40M	23013WPN.05.41M	23013WPN.05.42M	23013WPN.05.45M
9w	4000k	986	>93	250	1,8	23013WPN.09.40M	23013WPN.09.41M	23013WPN.09.42M	23013WPN.09.45M
12w	4000k	1368	>93	350	1,8	23013WPN.12.40M	23013WPN.12.41M	23013WPN.12.42M	23013WPN.12.45M
18w	4000k	1924	>93	500	1,8	23013WPN.18.40M	23013WPN.18.41M	23013WPN.18.42M	23013WPN.18.45M
26w	4000k	2630	>93	700	1,8	23013WPN.26.40M	23013WPN.26.41M	23013WPN.26.42M	23013WPN.26.45M

* Lichtstroom van armatuur, tolerantie van +/- 10%

* *Luminaire luminous flux, tolerance of +/- 10%*






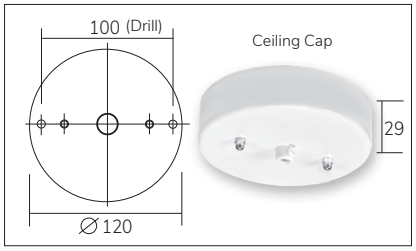



Opties:
- Vlees, Brood of Crisp white
- 2700k of 3500k

Opties:
- Meat, Bread or Crisp white
- 2700k or 3500k



23013WPN.05.30M
5w 3000k 594lm
ηLB 100%

melis lighting