Marici 160-150 SPECULAR SUSPENDED


Ronde LED pendel downlight. Voorzien van decoratieve aluminium (99,9%) hoogglans reflector (UGR<22). Zeer brede bundel (>80,0°) en hoge efficiency (max 150lm/w) met **CRI>93 (R9>83)**. Gesatineerde PS Microprisma afscherming voor extra comfort. Wit gelakte (RAL 9003) stalen behuizing. Wordt geleverd inclusief interne driver. Directe aansluiting op netspanning. Zeer geschikt als basis verlichting in gangen, kantoren, vides, kerken en moskeeën. Inclusief 3 meter snoer. Snelle en eenvoudige montage. Onderhoudsarm en hoge levensduurverwachting (L90B10 180.000 uur). Hoge kleurconsistentie SDCM <2. Vijf jaar garantie.

Round suspended LED downlight. High gloss aluminium reflector (99,9%) with specular finish (UGR<22). Extra wide beam angle (>80,0°) and high efficiency (max 150lm/w) with ***CRI>93 (R9>83)****. Satinated PS Microprism diffuser for high comfort. White painted steel body (RAL9003). Direct connection to mains. Very suitable as general lighting in hallways, offices, high rooms like lobby's, churches and mosques. Including 3 meter cable. Low maintenance and high life expectancy (L90B10 180.000 hours). High color consistency SDCM <2. Five years warranty.*


Wattage Watts	**Kleur** Colour	**Lumen*** Lumen*	**CRI** CRI	**Amperage (mA)** Amperage (mA)	**kg** kg	**Artikel nr.** Article no.	**Dimbaar (1-10V)** Dimmable (1-10V)	**Dali-2** Dali-2	**Casambi** Casambi
5w	3000k	715	>93	150	1,8	23013WPN.05.30	23013WPN.05.31	23013WPN.05.32	23013WPN.05.35
9w	3000k	1187	>93	250	1,8	23013WPN.09.30	23013WPN.09.31	23013WPN.09.32	23013WPN.09.35
12w	3000k	1646	>93	350	1,8	23013WPN.12.30	23013WPN.12.31	23013WPN.12.32	23013WPN.12.35
18w	3000k	2316	>93	500	1,8	23013WPN.18.30	23013WPN.18.31	23013WPN.18.32	23013WPN.18.35
26w	3000k	3166	>93	700	1,8	23013WPN.26.30	23013WPN.26.31	23013WPN.26.32	23013WPN.26.35
5w	4000k	715	>93	150	1,8	23013WPN.05.40	23013WPN.05.41	23013WPN.05.42	23013WPN.05.45
9w	4000k	1187	>93	250	1,8	23013WPN.09.40	23013WPN.09.41	23013WPN.09.42	23013WPN.09.45
12w	4000k	1646	>93	350	1,8	23013WPN.12.40	23013WPN.12.41	23013WPN.12.42	23013WPN.12.45
18w	4000k	2316	>93	500	1,8	23013WPN.18.40	23013WPN.18.41	23013WPN.18.42	23013WPN.18.45
26w	4000k	3166	>93	700	1,8	23013WPN.26.40	23013WPN.26.41	23013WPN.26.42	23013WPN.26.45

* Lichtstroom van armatuur, tolerantie van +/- 10%

* *Luminaire luminous flux, tolerance of +/- 10%*






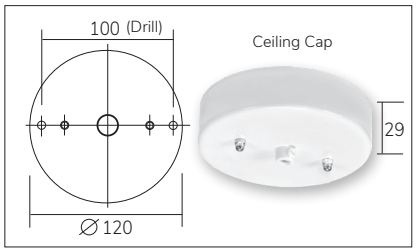



Opties:
- Vlees, Brood of Crisp white
- 2700k of 3500k

Opties:
- *Meat, Bread or Crisp white*
- *2700k or 3500k*



23013WPN.05.30
5w 3000k 715lm
ηLB 100%

melis lighting