

Marici 160-150 WHITE SUSPENDED



Ronde LED pendel downlight. Voorzien van decoratieve aluminium (99,9%) witte reflector (UGR<22). Brede bundel (>68,0°) en hoge efficiency (max 136lm/w) met **CRI>93**. Gesatineerde PS Microprisma afscherming voor extra comfort. Wit gelakte (RAL 9003) stalen behuizing. Wordt geleverd inclusief interne driver. Directe aansluiting op netspanning. Zeer geschikt als basis verlichting in gangen, kantoren, vides, kerken en moskeeën. Inclusief 3 meter snoer. Snelle en eenvoudige montage. Onderhoudsarm en hoge levensduurverwachting. Hoge kleurconsistentie SDCM <2. Vijf jaar garantie.


Round suspended LED downlight. High gloss aluminium reflector (99,9%) with white finish (UGR<22). Wide beam angle (>68,0°) and high efficiency (max 136lm/w) with **CRI>93**. Satinated PS Microprism diffuser for high comfort. White painted steel body (RAL9003). Direct connection to mains. Very suitable as general lighting in hallways, offices, high rooms like lobby's, churches and mosques. Including 3 meter cable. Low maintenance and high life expectancy. High color consistency SDCM <2. Fast and easy mounting. Five years warranty.

Wattage Watts	Kleur Colour	Lumen* Lumen*	CRI	Amperage (mA) Amperage (mA)	kg	Noodvoorz. (u) Emergency (h)	Artikel nr. Article no.	Dimbaar (1-10V) Dimmable (1-10V)	Dali-2 Dali-2	Casambi Casambi
5w	3000k	649	>93	150	1,8	1/3	23013WPN.05.30W	23013WPN.05.31W	23013WPN.05.32W	23013WPN.05.35W
9w	3000k	1077	>93	250	1,8	1/3	23013WPN.09.30W	23013WPN.09.31W	23013WPN.09.32W	23013WPN.09.35W
12w	3000k	1494	>93	350	1,8	1/3	23013WPN.12.30W	23013WPN.12.31W	23013WPN.12.32W	23013WPN.12.35W
18w	3000k	2102	>93	500	1,8	1/3	23013WPN.18.30W	23013WPN.18.31W	23013WPN.18.32W	23013WPN.18.35W
26w	3000k	2874	>93	700	1,8	1/3	23013WPN.26.30W	23013WPN.26.31W	23013WPN.26.32W	23013WPN.26.35W

5w	4000k	649	>93	150	1,8	1/3	23013WPN.05.40W	23013WPN.05.41W	23013WPN.05.42W	23013WPN.05.45W
9w	4000k	1077	>93	250	1,8	1/3	23013WPN.09.40W	23013WPN.09.41W	23013WPN.09.42W	23013WPN.09.45W
12w	4000k	1494	>93	350	1,8	1/3	23013WPN.12.40W	23013WPN.12.41W	23013WPN.12.42W	23013WPN.12.45W
18w	4000k	2102	>93	500	1,8	1/3	23013WPN.18.40W	23013WPN.18.41W	23013WPN.18.42W	23013WPN.18.45W
26w	4000k	2874	>93	700	1,8	1/3	23013WPN.26.40W	23013WPN.26.41W	23013WPN.26.42W	23013WPN.26.45W

* Lichtstroom van armatuur, tolerantie van +/- 10%

* Luminaire luminous flux, tolerance of +/- 10%

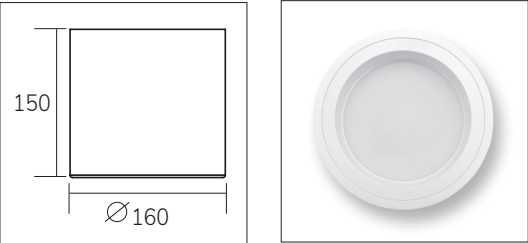


PENDEL ARMATUREN SUSPENDED LUMINAIRES



- Opties:**
- Vlees, Brood of Crisp white
 - 2700k of 3500k

- Opties:**
- Meat, Bread or Crisp white
 - 2700k or 3500k



23013WPN.05.30W
5w 3000k 649lm
ηLB 100%