

Marici 160-150 White Track


Ronde LED downlight met adapter voor 3-fase rail systemen. Voorzien van decoratieve aluminium (99,9%) wit gelakte reflector (UGR<22) met brede uitstraling (>68°) en hoge efficiency (max 136lm/w) met **CRI>93**. Gesatineerde PS Microprisma afscherming voor extra comfort. Zeer geschikt als basis verlichting in gangen of kantoren. Wit gelakte (RAL 9003) stalen behuizing. Wordt geleverd inclusief interne driver. Directe aansluiting op 220-240VAC. Onderhoudsarm en hoge levensduurverwachting (50.000 uur L90B10). Hoge kleurconsistentie SDCM <2. Vijf jaar garantie.

Round LED downlight with adapter for 3-phase track systems. White painted aluminium reflector (99,9%) (UGR<22) with wide beam angle (>68°) and high efficiency (max 136lm/w) with **CRI>93**. Satinated PS Microprism diffuser for high comfort. White painted steel body (RAL9003). Very suitable as general lighting in hallways and offices. Delivered including internal driver. Direct connection to 220-240VAC. Low maintenance and high life expectancy (50.000 hours L90B10). High color consistency SDCM <2. Five years warranty.

Wattage Watts	Kleur Colour	Lumen* Lumen*	CRI	Amperage (mA) Amperage (mA)	kg	Noodvoorz. (u) Emergency (h)	Artikel nr. Article no.	Dimbaar (1-10V) Dimmable (1-10V)	Dali-2 Dali-2	Casambi Casambi
5w	3000k	649	>93	150	1,6	1/3	23013WT.05.30W	23013WT.05.31W	23013WT.05.32W	23013WT.05.35W
9w	3000k	1077	>93	250	1,6	1/3	23013WT.09.30W	23013WT.09.31W	23013WT.09.32W	23013WT.09.35W
12w	3000k	1494	>93	350	1,6	1/3	23013WT.12.30W	23013WT.12.31W	23013WT.12.32W	23013WT.12.35W
18w	3000k	2102	>93	500	1,6	1/3	23013WT.18.30W	23013WT.18.31W	23013WT.18.32W	23013WT.18.35W
26w	3000k	2874	>93	700	1,6	1/3	23013WT.26.30W	23013WT.26.31W	23013WT.26.32W	23013WT.26.35W
5w	4000k	649	>93	150	1,6	1/3	23013WT.05.40W	23013WT.05.41W	23013WT.05.42W	23013WT.05.45W
9w	4000k	1077	>93	250	1,6	1/3	23013WT.09.40W	23013WT.09.41W	23013WT.09.42W	23013WT.09.45W
12w	4000k	1494	>93	350	1,6	1/3	23013WT.12.40W	23013WT.12.41W	23013WT.12.42W	23013WT.12.45W
18w	4000k	2102	>93	500	1,6	1/3	23013WT.18.40W	23013WT.18.41W	23013WT.18.42W	23013WT.18.45W
26w	4000k	2874	>93	700	1,6	1/3	23013WT.26.40W	23013WT.26.41W	23013WT.26.42W	23013WT.26.45W

* Lichtstroom van armatuur, tolerantie van +/- 10%

* Luminaire luminous flux, tolerance of +/- 10%

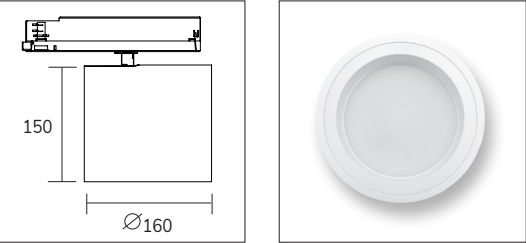

TRACK SYSTEEM TRACK SYSTEM



Accessoires:

- 3-fase rails en connectors

Opties:


- Vlees, Brood of Crisp white
- 2700k, 3000k of 3500k

Accessories:

- 3-phase tracks and connectors

Opties:

- Meat, Bread or Crisp white
- 2700k, 3000k or 3500k



23013WT.05.30W
5w 3000k 649lm
ηLB 100%