

Marici 195 Cross TW



IP44-65





Tunable white LED downlight met een lage inbouw-hoogte. Voorzien van decoratieve aluminium (99,9%) hoogglans reflector met kruisraaster lage verblinding (UGR<17). Gesatineerde PS Microprisma afscherming voor extra comfort. Zeer geschikt als basis verlichting in gangen of kantoren. Zeer brede bundel (>93,0°). Wit gelakte (RAL 9003) aluminium behuizing. Tunable white - dynamisch mengen van licht kleur tussen 2700K en 6500K (CRI>92). Wordt geleverd inclusief externe driver. Snelle en eenvoudige montage met veren. Directe aansluiting op 220-240VAC. Onderhoudsarm en hoge levensduurverwachting (60.000 uur L90B10). Kleur stabiliteit, Mac Adam <3. Vijf jaar garantie.

Tunable white modular LED downlight with shallow build-in height. High gloss aluminum reflector (99,9%) with decorative cross louvre and wide beam angle (>93,0°) and low glare (UGR<17). Satinated PS Microprism diffuser for high comfort. White painted aluminum die cast body (RAL9003). Tunable white - dynamic mixing of light colour, linear colour mixing between 2700K and 6500K (CRI>92). Very suitable as general lighting in hallways and offices. Direct connection to 220-240VAC. Low maintenance and high life expectancy (60.000 hours L90B10). Color stability, Mac Adam <3. Fast and easy mounting with springs. Five years warranty.


Wattage Watts	Kleur Colour	Lumen* Lumen*	CRI CRI	Gewicht (kg) Weight (kg)	Noodvoorz. (u) Emergency (h)	Artikel nr. Article no.	Casambi Casambi
13w	2700-6500k	1055-1230	>92	1,3	1/3	62009W.13.TWCR	62009W.13.TWCRC
19w	2700-6500k	1440-1690	>92	1,3	1/3	62009W.19.TWCR	62009W.19.TWCRC
27w	2700-6500k	2040-2400	>92	1,3	1/3	62009W.27.TWCR	62009W.27.TWCRC
32w	2700-6500k	2460-2830	>92	1,3	1/3	62009W.32.TWCR	62009W.32.TWCRC
37w	2700-6500k	2810-3290	>92	1,3	1/3	62009W.37.TWCR	62009W.37.TWCRC
48w	2700-6500k	3535-4150	>92	1,3	1/3	62009W.48.TWCR	62009W.48.TWCRC

* Lichtstroom van armatuur, tolerantie van +/- 10%

* Luminaire luminous flux, tolerance of +/- 10%

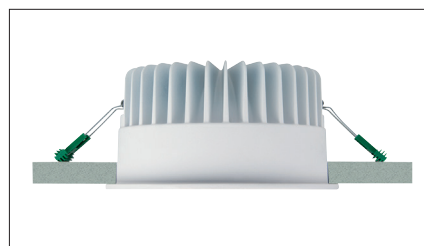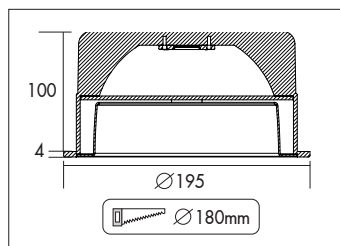

INBOUW DOWNLIGHTS RECESSED DOWNLIGHTS

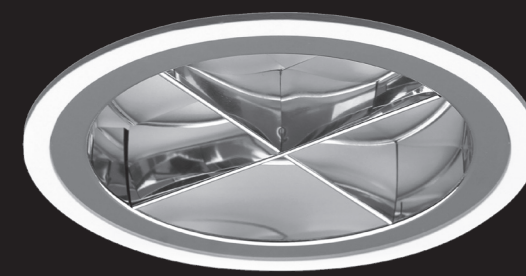


Opties:

- 1,5 meter snoer met 3-polige Shuko stekker
- 0,5 meter snoer + GST18i3® connector (niet - dimbaar)
- 0,5 meter snoer + GST18i3® and BST14i2 connector (dim)
- 0,5 meter snoer + GST18i5® Blue connector male (dim)
- Andere RAL kleur
- 2700K, 3500k, 5000k of hogere CRI waarde 90/97
- Vlees, brood of Crisp White
- IP65

Options:

- 1,5m cable with Shuko 3-pin plug
- 0,5 meter cable + GST18i3® connector (non - dimmable)
- 0,5 meter cable + GST18i3® and BST14i2 connector (dim)
- 0,5 meter cable + GST18i5® Blue connector male (dim)
- Different RAL color
- 2700k, 3500k, 5000k or higher CRI values 90/97
- Meat, bread or Crisp White
- IP65



62009W.13.TWCR
13w 2700k-6500k 1055-1230lm
ηLB 68,0%

melis lighting

