Marici 195 Cross TW

Tunable White

Tunable white LED downlight met een lage inbouw-hoogte. Voorzien van decoratieve aluminium (99,9%) hoogglans reflector met kruisraster lage verblinding (UGR<17). Gesatineerde PS Microprisma afscherming voor extra comfort. Zeer geschikt als basis verlichting in gangen of kantoren. Zeer brede bundel (>93,0°). Wit gelakte (RAL 9003) aluminium behuizing. Tunable white - dynamisch mengen van licht kleur tussen 2700K en 6500K (**CRI>93, R9>83**). Wordt geleverd inclusief externe driver. Snelle en eenvoudige montage met veren. Directe aansluiting op 220-240VAC. Onderhoudsarm en hoge levensduurverwachting (L90B10 125.000 uur). Hoge kleurconsistentie SDCM <2. Vijf jaar garantie.

*Tunable white modular LED downlight with shallow build-in height. High gloss aluminum reflector (99,9%) with decorative cross louvre and wide beam angle (>93,0°) and low glare (UGR<17). Satinated PS Microprism diffuser for high comfort. White painted aluminum die cast body (RAL9003). Tunable white - dynamic mixing of light colour, linear colour mixing between 2700K and 6500K (**CRI>93, R9>83**). Very suitable as general lighting in hallways and offices. Direct connection to 220-240VAC. Fast and easy mounting with springs. Low maintenance and high life expectancy (L90B10 125.000 hours). High color consistency SDCM <2. Five years warranty.*

Wattage Watts	**Kleur** *Colour*	**Lumen*** *Lumen**	**CRI** *CRI*	**Gewicht (kg)** *Weight (kg)*	**Noodvoorz. (u)** *Emergency (h)*	**Dali-2** *Dali-2*	**Casambi** *Casambi*
5w	2700-6500k	566-604	>93	1,3	1/3	62009W.5.TWCR	62009W.5.TWCRC
8w	2700-6500k	917-978	>93	1,3	1/3	62009W.8.TWCR	62009W.8.TWCRC
12w	2700-6500k	1259-1344	>93	1,3	1/3	62009W.12.TWCR	62009W.12.TWCRC
18w	2700-6500k	1768-1886	>93	1,3	1/3	62009W.18.TWCR	62009W.18.TWCRC
26w	2700-6500k	2593-2767	>93	1,3	1/3	62009W.26.TWCR	62009W.26.TWCRC
34w	2700-6500k	3115-3324	>93	1,3	1/3	62009W.34.TWCR	62009W.34.TWCRC
40w	2700-6500k	3604-3846	>93	1,3	1/3	62009W.40.TWCR	62009W.40.TWCRC
48w	2700-6500k	4129-4407	>93	1,3	1/3	62009W.48.TWCR	62009W.48.TWCRC

* Lichtstroom van armatuur, tolerantie van +/- 10%

* *Luminaire luminous flux, tolerance of +/- 10%*





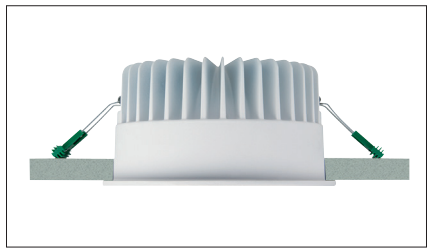

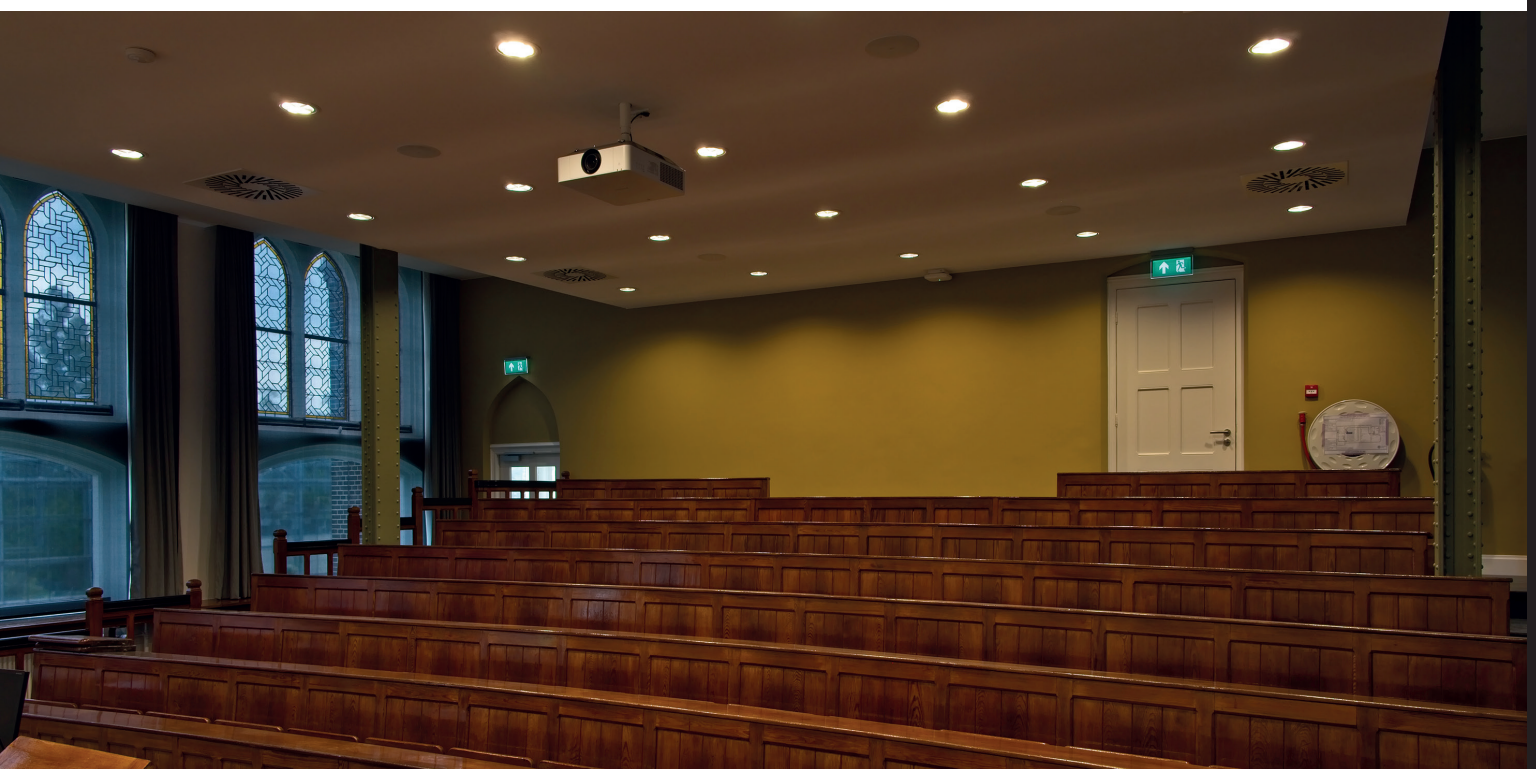

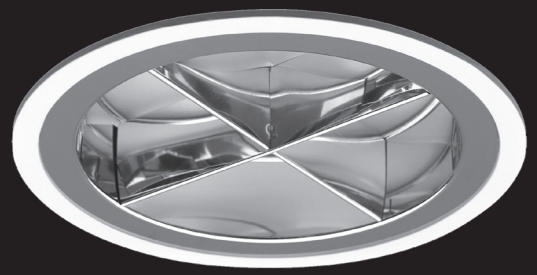

Opties:
- 1,5 meter snoer met 3-polige Shuko stekker
- 0,5 meter snoer + GST18i3® connector (niet - dimbaar)
- 0,5 meter snoer + GST18i3® and BST14i2 connector (dim)
- 0,5 meter snoer + GST18i5® Blue connector male (dim)
- Andere RAL kleur
- 2700K, 3500k, 5000k of hogere CRI waarde 90/97
- Vlees, brood of Crisp White
- IP65

Options:
- *1,5m cable with Shuko 3-pin plug*
- *0,5 meter cable + GST18i3® connector (non - dimmable)*
- *0,5 meter cable + GST18i3® and BST14i2 connector (dim)*
- *0,5 meter cable + GST18i5® Blue connector male (dim)*
- *Different RAL color*
- *2700k, 3500k, 5000k or higher CRI values 90/97*
- *Meat, bread or Crisp White*
- *IP65*



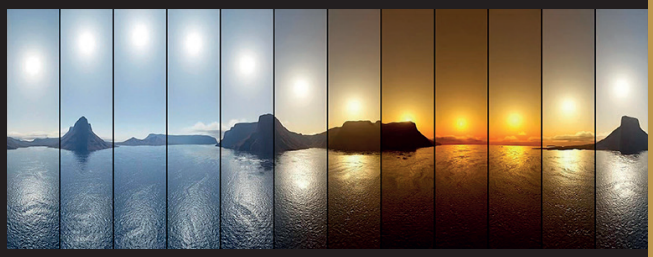



62009W.5.TWCR
5w 2700k-6500k 566-604 lm
ηLB 100%

melis lighting