

Marici 195 Darklight





Ronde LED downlight met een lage inbouwhoogte. Voorzien van trompetvormige darklight reflector van 99,98% hoogglans aluminium met brede bundel (>79°) en hoge efficiency (max 177lm/w) met **CRI>93 (R9>88)**. Zeer lage verblinding (UGR<19, 9-18w) en minimale helderheid door uniek darklight reflector ontwerp. Wit gelakte (RAL 9003) aluminium behuizing. Wordt geleverd inclusief externe driver. Directe aansluiting op 220-240VAC. Snelle en eenvoudige montage met veren. Onderhoudsarm en hoge levensduurverwachting. Hoge kleurconsistentie SDCM <2. Vijf jaar garantie.

Round LED downlight with shallow build-in height. Trumpet shaped darklight reflector made of 99,98% specular aluminium with wide beam angle (>79°) with high efficiency (max 177lm/w) and **CRI>93 (R9>88)**. Very low glare (UGR<19, 9-18w) and minimal brightness due to unique darklight reflector design. White painted die cast aluminium body (RAL9003). Delivered including external driver. Direct connection to 220-240VAC. Low maintenance and high life expectancy. High color consistency SDCM <2. Fast and easy mounting with springs. Five years warranty.

Wattage Watts	Kleur Colour	Lumen* Lumen*	Amperage (mA) Amperage (mA)	Gewicht (kg) Weight (kg)	Noodvoorz. (u) Emergency (h)	Artikel nr. Article no.	Dimbaar (1-10V) Dimmable (1-10V)	Dali-2 Dali-2	Casambi Casambi
5w	3000k	841	150	1,3	1/3	62020WS.00.DK	62020WS.01.DK	62020WS.02.DK	62020WS.05.DK
9w	3000k	1395	250	1,3	1/3	62020W.00.DK	62020W.01.DK	62020W.02.DK	62020W.05.DK
12w	3000k	1935	350	1,3	1/3	62006W.00.DK	62006W.01.DK	62006W.02.DK	62006W.05.DK
18w	3000k	2723	500	1,3	1/3	62017W.00.DK	62017W.01.DK	62017W.02.DK	62017W.05.DK
26w	3000k	3723	700	1,3	1/3	62010W.00.DK	62010W.01.DK	62010W.02.DK	62010W.05.DK
34w	3000k	4671	900	1,3	1/3	62015W.00.DK	62015W.01.DK	62015W.02.DK	62015W.05.DK
40w	3000k	5313	1050	1,3	1/3	62013W.00.DK	62013W.01.DK	62013W.02.DK	62013W.05.DK
5w	4000k	841	150	1,3	1/3	62021WS.00.DK	62021WS.01.DK	62021WS.02.DK	62021WS.05.DK
9w	4000k	1395	250	1,3	1/3	62021W.00.DK	62021W.01.DK	62021W.02.DK	62021W.05.DK
12w	4000k	1935	350	1,3	1/3	62007W.00.DK	62007W.01.DK	62007W.02.DK	62007W.05.DK
18w	4000k	2723	500	1,3	1/3	62018W.00.DK	62018W.01.DK	62018W.02.DK	62018W.05.DK
26w	4000k	3723	700	1,3	1/3	62012W.00.DK	62012W.01.DK	62012W.02.DK	62012W.05.DK
34w	4000k	4671	900	1,3	1/3	62016W.00.DK	62016W.01.DK	62016W.02.DK	62016W.05.DK
40w	4000k	5313	1050	1,3	1/3	62014W.00.DK	62014W.01.DK	62014W.02.DK	62014W.05.DK

* Lichtstroom van armatuur, tolerantie van +/- 10%

* Luminaire luminous flux, tolerance of +/- 10%

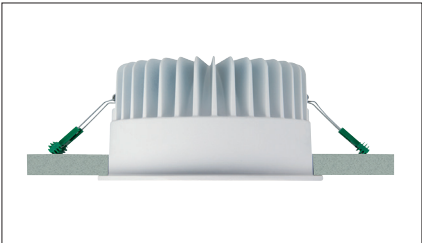

INBOUW DOWNLIGHTS RECESSED DOWNLIGHTS




Opties:

- 1,5 meter snoer met 3-polige Shuko stekker
- 0,5 meter snoer + GST18i3® connector (niet - dimbaar)
- 0,5 meter snoer + GST18i3® and BST14i2 connector (dim)
- 0,5 meter snoer + GST18i5® Blue connector male (dim)
- Andere RAL kleur
- 2700K, 3500k, 5000k of hogere CRI waarde 90/97
- Vlees, brood of Crisp White

Options:

- 1,5m cable with Shuko 3-pin plug
- 0,5 meter cable + GST18i3® connector (non - dimmable)
- 0,5 meter cable + GST18i3® and BST14i2 connector (dim)
- 0,5 meter cable + GST18i5® Blue connector male (dim)
- Different RAL color
- 2700k, 3500k, 5000k or higher CRI values 90/97
- Meat, bread or Crisp White



62020WS.00.DK
5w 3000k 841lm
ηLB 100%

melis lighting