

Marici 195 Facet






Ronde LED downlight met een lage inbouwhoogte. Voorzien van decoratieve aluminium (99,9%) facet reflector (UGR<19 - <3000lm). Zeer brede bundel (83°) en hoge efficiency (max 163lm/w) met **CRI>93 (R9>88)**. Wit gelakte (RAL 9003) aluminium behuizing. Zeer geschikt als basis verlichting in gangen of kantoren. Wordt geleverd inclusief externe driver. Directe aansluiting op 220-240VAC. Onderhoudsarm en hoge levensduurverwachting. Hoge kleurconsistentie SDCM <2. Vijf jaar garantie.

Round LED downlight with shallow build-in height. Faceted aluminum reflector (99,9%) (UGR<19 - <3000lm) with specular finish. Extra wide beam angle (83°) and high efficiency (max 163lm/w) with **CRI>93 (R9>88)**. White painted aluminum die cast body (RAL9003). Very suitable as general lighting in hallways and offices. Delivered including external driver. Direct connection to 220-240VAC. Low maintenance and high life expectancy. High color consistency SDCM <2. Fast and easy mounting with springs. Five years warranty.


Wattage Watts	Kleur Colour	Lumen* Lumen*	CRI CRI	Amperage (mA) Amperage (mA)	Gewicht (kg) Weight (kg)	Noodvoorz. (u) Emergency (h)	Artikel nr. Article no.	Dimbaar (1-10V) Dimmable (1-10V)	Dali-2 Dali-2	Casambi Casambi
5w	3000k	817	>93	150	1,3	1/3	62020WS.00F	62020WS.01F	62020WS.02F	62020WS.05F
8w	3000k	1356	>93	250	1,3	1/3	62020W.00F	62020W.01F	62020W.02F	62020W.05F
12w	3000k	1881	>93	350	1,3	1/3	62006W.00F	62006W.01F	62006W.02F	62006W.05F
17w	3000k	2647	>93	500	1,3	1/3	62017W.00F	62017W.01F	62017W.02F	62017W.05F
25w	3000k	3618	>93	700	1,3	1/3	62010W.00F	62010W.01F	62010W.02F	62010W.05F
33w	3000k	4539	>93	900	1,3	1/3	62015W.00F	62015W.01F	62015W.02F	62015W.05F
39w	3000k	5163	>93	1050	1,3	1/3	62013W.00F	62013W.01F	62013W.02F	62013W.05F
5w	4000k	817	>93	150	1,3	1/3	62021WS.00F	62021WS.01F	62021WS.02F	62021WS.05F
8w	4000k	1356	>93	250	1,3	1/3	62021W.00F	62021W.01F	62021W.02F	62021W.05F
12w	4000k	1881	>93	350	1,3	1/3	62007W.00F	62007W.01F	62007W.02F	62007W.05F
17w	4000k	2647	>93	500	1,3	1/3	62018W.00F	62018W.01F	62018W.02F	62018W.05F
25w	4000k	3618	>93	700	1,3	1/3	62012W.00F	62012W.01F	62012W.02F	62012W.05F
33w	4000k	4539	>93	900	1,3	1/3	62016W.00F	62016W.01F	62016W.02F	62016W.05F
39w	4000k	5163	>93	1050	1,3	1/3	62014W.00F	62014W.01F	62014W.02F	62014W.05F

* Lichtstroom van armatuur, tolerantie van +/- 10%

* Luminaire luminous flux, tolerance of +/- 10%

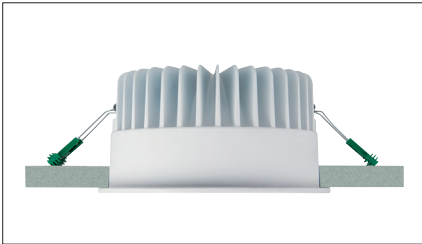

INBOUW DOWNLIGHTS RECESSED DOWNLIGHTS

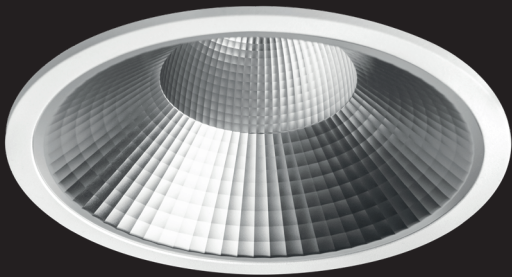


Opties:

- 1,5 meter snoer met 3-polige Shuko stekker
- 0,5 meter snoer + GST18i3® connector (niet - dimbaar)
- 0,5 meter snoer + GST18i3® and BST14i2 connector (dim)
- 0,5 meter snoer + GST18i5® Blue connector male (dim)
- Andere RAL kleur
- 2700K, 3500k, 5000k of hogere CRI waarde 90/97
- Vlees, brood of Crisp White
- IP65

Options:

- 1,5m cable with Shuko 3-pin plug
- 0,5 meter cable + GST18i3® connector (non - dimmable)
- 0,5 meter cable + GST18i3® and BST14i2 connector (dim)
- 0,5 meter cable + GST18i5® Blue connector male (dim)
- Different RAL color
- 2700k, 3500k, 5000k or higher CRI values 90/97
- Meat, bread or Crisp White
- IP65



62020WS.00F

5w 3000k 817lm
ηLB 100%