

Marici 195 Specular TRW BCL

PF>0,95



IP44-65



Triple Tunable White LED downlight met lage inbouwhoogte en gesatineerde PS Microprisma afscherming. Brede bundel (>74°) en lage verblinding op maximaal vermogen (UGR<19). Hoogglans aluminium reflector. Triple Tunable white - dynamisch mengen van licht kleur tussen 1800k, 2700K en 6500K (CRI>92). Wit gelakte (RAL 9003) aluminium behuizing. Zeer geschikt als basis verlichting in scholen, theaters en musea. Wordt geleverd inclusief externe DALI driver. Directe aansluiting op 220-240VAC. Kleurstabiliteit Mac Adam <3. Snelle en eenvoudige montage met veren. Onderhoudsvrij en hoge levensduurverwachting (60.000 uur L90B10). Vijf jaar garantie.



Triple Tunable white modular LED downlight with a satinated PS Microprism diffuser. Wide beam angle (>74°) and low glare at maximum power (UGR<19). High gloss aluminum reflector. Triple Tunable white - dynamic mixing of light colour, linear colour mixing between 1800k, 2700K and 6500k (CRI>92). White painted aluminium die cast body (RAL9003). Very suitable as general lighting in schools, theatres and museums. Delivered including external DALI driver. Direct connection to 220-240VAC. Colour stability, Mac Adam <3. Low maintenance and high life expectancy (60.000 hours L90B10). Fast and easy mounting with springs. Five years warranty.

Wattage Watts	Kleur Colour	Lumen* Lumen*	Amperage (mA) Amperage (mA)	CRI CRI	Gewicht (kg) Weight (kg)	Noodvoorz. (u) Emergency (h)	Dali-BCL Dali-BCL
17w	1800k	970	500	>92	1,3	1/3	62009W.17.TRW
17w	2700k	1422	500	>92	1,3	1/3	
17w	6500k	1483	500	>92	1,3	1/3	
24w	1800k	1358	700	>92	1,3	1/3	62009W.24.TRW
24w	2700k	1990	700	>92	1,3	1/3	
24w	6500k	2076	700	>92	1,3	1/3	
31w	1800k	1746	900	>92	1,3	1/3	62009W.31.TRW
31w	2700k	2559	900	>92	1,3	1/3	
31w	6500k	2669	900	>92	1,3	1/3	
36w	1800k	2037	1050	>92	1,3	1/3	62009W.36.TRW
36w	2700k	2986	1050	>92	1,3	1/3	
36w	6500k	3114	1050	>92	1,3	1/3	
41w	1800k	2328	1200	>92	1,3	1/3	62009W.41.TRW
41w	2700k	3412	1200	>92	1,3	1/3	
41w	6500k	3559	1200	>92	1,3	1/3	
48w	1800k	2716	1400	>92	1,3	1/3	62009W.48.TRW
48w	2700k	3981	1400	>92	1,3	1/3	
48w	6500k	4152	1400	>92	1,3	1/3	

* Lichtstroom van armatuur, tolerantie van +/- 10%

* Luminaire luminous flux, tolerance of +/- 10%

BCL certification ensures integration into the Biocentric lighting system with characterization of light properties for health and circadian impact. Integration into the BCL system optimizes health, visual comfort and aesthetics and as a solution delivers Biocentric lighting compliant with ISO 8995-1:2025. BCL certified luminaires by Melis Lighting will enjoy all features and the full health benefits of a Biocentric lighting solution, giving you healthy lighting with your favorite luminaires.

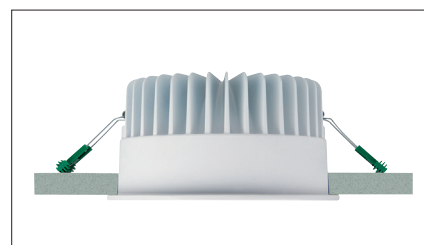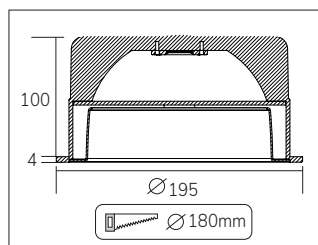

INBOUW DOWNLIGHTS RECESSED DOWNLIGHTS





Opties:

- GST18i5® connector
- Andere RAL kleur
- IP65

Options:

- GST18i5® connector
- Different RAL color
- IP65

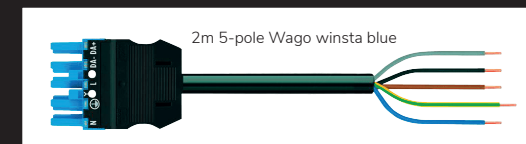

62009W.17.TRW

17w 1800-2700-6500K 970-1422-1483 lm
ηLB 73%

melis lighting