



Ronde LED wallwasher downlight met een lage inbouwhoogte. Voorzien van decoratieve aluminium (99,9%) matte reflector (UGR<18). Gesatineerde PS Microprisma afscherming voor extra comfort. Zeer geschikt als basis verlichting in gangen of kantoren. Zeer brede bundel (74,0°) en hoge efficiency (max 132lm/w) met **CRI>93 (R9>83)**. Wit gelakte (RAL 9003) aluminium behuizing. Wordt geleverd inclusief externe driver. Snelle en eenvoudige montage met veren. Directe aansluiting op 220-240VAC. Onderhoudsarm en hoge levensduurverwachting. Hoge kleurconsistentie SDCM <2. Vijf

Round LED wallwasher downlight with shallow build-in height. High gloss aluminium reflector (99,9%) with matt finish (UGR<18). Extra wide beam angle (74,0°) and high efficiency (max 132lm/w) with **CRI>93 (R9>83)**. Satinated PS Microprism diffuser for high comfort. White painted aluminium die cast body (RAL9003). Very suitable as general lighting in hallways and offices. Delivered including external driver. Direct connection to 220-240VAC. Low maintenance and high life expectancy. High color consistency SDCM <2. Fast and easy mounting with springs. Five years warranty.

Wattage	Kleur	Lumen*	CRI	Amperage (mA)	Gewicht (kg)	Noodvoorz. (u)	Artikel nr.	Dimbaar (1-10V)	Dali-2	Casambi
Watts	Colour	Lumen*	CRI	Amperage (mA)	Weight (kg)	Emergency (h)	Article no.	Dimmable (1-10V)	Dali-2	Casambi
5w	3000k	622	>93	150	1,3	1/3	62020WS.00.M.WS	62020WS.01.M.WS	62020WS.02.M.WS	62020WS.05.M.WS
8w	3000k	1032	>93	250	1,3	1/3	62020W.00.M.WS	62020W.01.M.WS	62020W.02.M.WS	62020W.05.M.WS
12w	3000k	1432	>93	350	1,3	1/3	62006W.00.M.WS	62006W.01.M.WS	62006W.02.M.WS	62006W.05.M.WS
17w	3000k	2015	>93	500	1,3	1/3	62017W.00.M.WS	62017W.01.M.WS	62017W.02.M.WS	62017W.05.M.WS
25w	3000k	2754	>93	700	1,3	1/3	62010W.00.M.WS	62010W.01.M.WS	62010W.02.M.WS	62010W.05.M.WS
33w	3000k	3456	>93	900	1,3	1/3	62015W.00.M.WS	62015W.01.M.WS	62015W.02.M.WS	62015W.05.M.WS
39w	3000k	3931	>93	1050	1,3	1/3	62013W.00.M.WS	62013W.01.M.WS	62013W.02.M.WS	62013W.05.M.WS
5w	4000k	622	>93	150	1,3	1/3	62021WS.00.M.WS	62021WS.01.M.WS	62021WS.02.M.WS	62021WS.05.M.WS
8w	4000k	1032	>93	250	1,3	1/3	62021W.00.M.WS	62021W.01.M.WS	62021W.02.M.WS	62021W.05.M.WS
12w	4000k	1432	>93	350	1,3	1/3	62007W.00.M.WS	62007W.01.M.WS	62007W.02.M.WS	62007W.05.M.WS
17w	4000k	2015	>93	500	1,3	1/3	62018W.00.M.WS	62018W.01.M.WS	62018W.02.M.WS	62018W.05.M.WS
25w	4000k	2754	>93	700	1,3	1/3	62012W.00.M.WS	62012W.01.M.WS	62012W.02.M.WS	62012W.05.M.WS
33w	4000k	3456	>93	900	1,3	1/3	62016W.00.M.WS	62016W.01.M.WS	62016W.02.M.WS	62016W.05.M.WS
39w	4000k	3931	>93	1050	1,3	1/3	62014W.00.M.WS	62014W.01.M.WS	62014W.02.M.WS	62014W.05.M.WS

* Lichtstroom van armatuur, tolerantie van +/- 10%

* Luminaire luminous flux, tolerance of +/- 10%

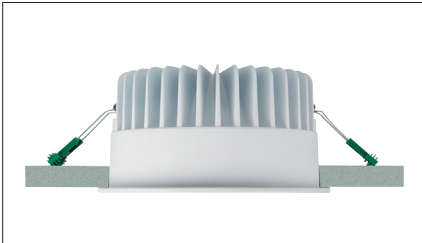


INBOUW DOWNLIGHTS RECESSED DOWNLIGHTS



- Opties:**
- 1,5 meter snoer met 3-polige Shuko stekker
 - 0,5 meter snoer + GST18i3® connector (niet - dimbaar)
 - 0,5 meter snoer + GST18i3® and BST14i2 connector (dim)
 - 0,5 meter snoer + GST18i5® Blue connector male (dim)
 - Andere RAL kleur
 - 2700K, 3500k, 5000k of hogere CRI waarde 90/97
 - Vlees, brood of Crisp White
 - IP65

- Options:**
- 1,5m cable with Shuko 3-pin plug
 - 0,5 meter cable + GST18i3® connector (non - dimmable)
 - 0,5 meter cable + GST18i3® and BST14i2 connector (dim)
 - 0,5 meter cable + GST18i5® Blue connector male (dim)
 - Different RAL color
 - 2700k, 3500k, 5000k or higher CRI values 90/97
 - Meat, bread or Crisp White
 - IP65



62020WS.00.M.WS
5w 3000k 622lm
ηLB 100%