

Ronde LED wallwasher downlight met een lage inbouwhoogte. Voorzien van decoratieve aluminium (99,9%) hoogglans reflector (UGR<19) **CRI>93 (R9>83)**. Gesatineerde PS Microprisma afscherming voor extra comfort. Wit gelakte (RAL 9003) aluminium behuizing. Wordt geleverd inclusief externe driver. Directe aansluiting op 220-240VAC. Onderhoudsarm en hoge levensduurverwachting. Hoge kleurconsistentie SDCM <2. Vijf jaar garantie.




Round LED wallwasher downlight with shallow build-in height. Specular aluminum reflector (99,9%), (UGR<19) **CRI>93 (R9>83)**. Satinated PS Microprism diffuser for high comfort. White painted die cast aluminum body (RAL9003). Delivered including external driver. Direct connection to 220-240VAC. Low maintenance and high life expectancy. High color consistency SDCM <2. Fast and easy mounting with springs. Five years warranty.

Wattage Watts	Kleur Colour	Lumen* Lumen*	CRI CRI	Amperage (mA) Amperage (mA)	Gewicht (kg) Weight (kg)	Noodvoorz. (u) Emergency (h)	Artikel nr. Article no.	Dimbaar (1-10V) Dimmable (1-10V)	Dali-2 Dali-2	Casambi Casambi
5w	3000k	688	>93	150	1,3	1/3	62020WS.00.WS	62020WS.01.WS	62020WS.02.WS	62020WS.05.WS
8w	3000k	1142	>93	250	1,3	1/3	62020W.00.WS	62020W.01.WS	62020W.02.WS	62020W.05.WS
12w	3000k	1584	>93	350	1,3	1/3	62006W.00.WS	62006W.01.WS	62006W.02.WS	62006W.05.WS
17w	3000k	2228	>93	500	1,3	1/3	62017W.00.WS	62017W.01.WS	62017W.02.WS	62017W.05.WS
25w	3000k	3047	>93	700	1,3	1/3	62010W.00.WS	62010W.01.WS	62010W.02.WS	62010W.05.WS
33w	3000k	3822	>93	900	1,3	1/3	62015W.00.WS	62015W.01.WS	62015W.02.WS	62015W.05.WS
39w	3000k	4347	>93	1050	1,3	1/3	62013W.00.WS	62013W.01.WS	62013W.02.WS	62013W.05.WS

5w	4000k	688	>93	150	1,3	1/3	62021WS.00.WS	62021WS.01.WS	62021WS.02.WS	62021WS.05.WS
8w	4000k	1142	>93	250	1,3	1/3	62021W.00.WS	62021W.01.WS	62021W.02.WS	62021W.05.WS
12w	4000k	1584	>93	350	1,3	1/3	62007W.00.WS	62007W.01.WS	62007W.02.WS	62007W.05.WS
17w	4000k	2228	>93	500	1,3	1/3	62018W.00.WS	62018W.01.WS	62018W.02.WS	62018W.05.WS
25w	4000k	3047	>93	700	1,3	1/3	62012W.00.WS	62012W.01.WS	62012W.02.WS	62012W.05.WS
33w	4000k	3822	>93	900	1,3	1/3	62016W.00.WS	62016W.01.WS	62016W.02.WS	62016W.05.WS
39w	4000k	4347	>93	1050	1,3	1/3	62014W.00.WS	62014W.01.WS	62014W.02.WS	62014W.05.WS

* Lichtstroom van armatuur, tolerantie van +/- 10%

* Luminaire luminous flux, tolerance of +/- 10%

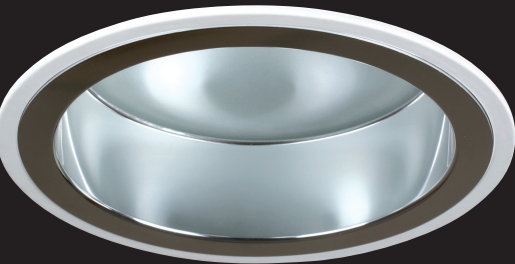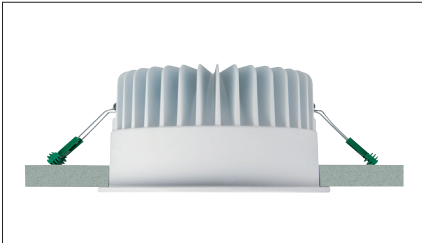


Opties:

- 1,5 meter snoer met 3-polige Shuko stekker
- 0,5 meter snoer + GST18i3® connector (niet - dimbaar)
- 0,5 meter snoer + GST18i3® and BST14i2 connector (dim)
- 0,5 meter snoer + GST18i5® Blue connector male (dim)
- Andere RAL kleur
- 2700K, 3500k, 5000k of hogere CRI waarde 90/97
- Vlees, brood of Crisp White
- IP65

Options:

- 1,5m cable with Shuko 3-pin plug
- 0,5 meter cable + GST18i3® connector (non - dimmable)
- 0,5 meter cable + GST18i3® and BST14i2 connector (dim)
- 0,5 meter cable + GST18i5® Blue connector male (dim)
- Different RAL color
- 2700k, 3500k, 5000k or higher CRI values 90/97
- Meat, bread or Crisp White
- IP65



62020WS.00.WS
5w 3000k 688lm
ηLB 100%