

Ronde LED wallwasher downlight met een lage inbouwhoogte. Voorzien van decoratieve aluminium (99,9%) witte reflector (UGR<18). Gesatineerde PS Microprisma afscherming voor extra comfort. Zeer geschikt als basis verlichting in gangen of kantoren. Zeer brede bundel (73°) en hoge efficiency (max 138lm/w) met **CRI>93 (R9>83)**. Wit gelakte (RAL 9003) aluminium behuizing. Wordt geleverd inclusief externe driver. Directe aansluiting op 220-240VAC. Onderhoudsarm en hoge levensduurverwachting. Hoge kleurconsistentie SDCM <2. Vijf jaar garantie.


Round LED wallwasher downlight with shallow build-in height. High gloss aluminum reflector (99,9%) with white finish (UGR<18). Extra wide beam angle (73°) and high efficiency (max 138lm/w) with **CRI>93 (R9>83)**. Satinated PS Microprism diffuser for high comfort. White painted aluminum die cast body (RAL9003). Very suitable as general lighting in hallways and offices. Delivered including external driver. Direct connection to 220-240VAC. Low maintenance and high life expectancy. High color consistency SDCM <2. Fast and easy mounting with springs. Five years warranty.

| Wattage<br>Watts | Kleur<br>Colour | Lumen*<br>Lumen* | CRI<br>CRI | Amperage (mA)<br>Amperage (mA) | Gewicht (kg)<br>Weight (kg) | Noodvoorz. (u)<br>Emergency (h) | Artikel nr.<br>Article no. | Dimbaar (1-10V)<br>Dimmable (1-10V) | Dali-2<br>Dali-2 | Casambi<br>Casambi |
|------------------|-----------------|------------------|------------|--------------------------------|-----------------------------|---------------------------------|----------------------------|-------------------------------------|------------------|--------------------|
| 5w               | 3000k           | 638              | >93        | 150                            | 1,3                         | 1/3                             | 62020WS.00.W.WS            | 62020WS.01.W.WS                     | 62020WS.02.W.WS  | 62020WS.05.W.WS    |
| 8w               | 3000k           | 1059             | >93        | 250                            | 1,3                         | 1/3                             | 62020W.00.W.WS             | 62020W.01.W.WS                      | 62020W.02.W.WS   | 62020W.05.W.WS     |
| 12w              | 3000k           | 1469             | >93        | 350                            | 1,3                         | 1/3                             | 62006W.00.W.WS             | 62006W.01.W.WS                      | 62006W.02.W.WS   | 62006W.05.W.WS     |
| 17w              | 3000k           | 2067             | >93        | 500                            | 1,3                         | 1/3                             | 62017W.00.W.WS             | 62017W.01.W.WS                      | 62017W.02.W.WS   | 62017W.05.W.WS     |
| 25w              | 3000k           | 2825             | >93        | 700                            | 1,3                         | 1/3                             | 62010W.00.W.WS             | 62010W.01.W.WS                      | 62010W.02.W.WS   | 62010W.05.W.WS     |
| 33w              | 3000k           | 3545             | >93        | 900                            | 1,3                         | 1/3                             | 62015W.00.W.WS             | 62015W.01.W.WS                      | 62015W.02.W.WS   | 62015W.05.W.WS     |
| 39w              | 3000k           | 4032             | >93        | 1050                           | 1,3                         | 1/3                             | 62013W.00.W.WS             | 62013W.01.W.WS                      | 62013W.02.W.WS   | 62013W.05.W.WS     |

|     |       |      |     |      |     |     |                 |                 |                 |                 |
|-----|-------|------|-----|------|-----|-----|-----------------|-----------------|-----------------|-----------------|
| 5w  | 4000k | 638  | >93 | 150  | 1,3 | 1/3 | 62021WS.00.W.WS | 62021WS.01.W.WS | 62021WS.02.W.WS | 62021WS.05.W.WS |
| 8w  | 4000k | 1059 | >93 | 250  | 1,3 | 1/3 | 62021W.00.W.WS  | 62021W.01.W.WS  | 62021W.02.W.WS  | 62021W.05.W.WS  |
| 12w | 4000k | 1469 | >93 | 350  | 1,3 | 1/3 | 62007W.00.W.WS  | 62007W.01.W.WS  | 62007W.02.W.WS  | 62007W.05.W.WS  |
| 17w | 4000k | 2067 | >93 | 500  | 1,3 | 1/3 | 62018W.00.W.WS  | 62018W.01.W.WS  | 62018W.02.W.WS  | 62018W.05.W.WS  |
| 25w | 4000k | 2825 | >93 | 700  | 1,3 | 1/3 | 62012W.00.W.WS  | 62012W.01.W.WS  | 62012W.02.W.WS  | 62012W.05.W.WS  |
| 33w | 4000k | 3545 | >93 | 900  | 1,3 | 1/3 | 62016W.00.W.WS  | 62016W.01.W.WS  | 62016W.02.W.WS  | 62016W.05.W.WS  |
| 39w | 4000k | 4032 | >93 | 1050 | 1,3 | 1/3 | 62014W.00.W.WS  | 62014W.01.W.WS  | 62014W.02.W.WS  | 62014W.05.W.WS  |

\* Lichtstroom van armatuur, tolerantie van +/- 10%

\* Luminaire luminous flux, tolerance of +/- 10%

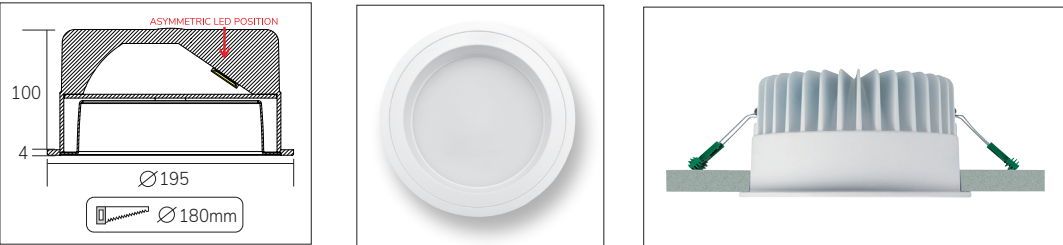


INBOUW DOWNLIGHTS

RECESSED DOWNLIGHTS



- Opties:**
- 1,5 meter snoer met 3-polige Shuko stekker
  - 0,5 meter snoer + GST18i3® connector (niet - dimbaar)
  - 0,5 meter snoer + GST18i3® and BST14i2 connector (dim)
  - 0,5 meter snoer + GST18i5® Blue connector male (dim)
  - Andere RAL kleur
  - 2700K, 3500k, 5000k of hogere CRI waarde 90/97
  - Vlees, brood of Crisp White
  - IP65

- Options:**
- 1,5m cable with Shuko 3-pin plug
  - 0,5 meter cable + GST18i3® connector (non - dimmable)
  - 0,5 meter cable + GST18i3® and BST14i2 connector (dim)
  - 0,5 meter cable + GST18i5® Blue connector male (dim)
  - Different RAL color
  - 2700k, 3500k, 5000k or higher CRI values 90/97
  - Meat, bread or Crisp White
  - IP65



62020WS.00.W.WS  
5w 3000k 638lm  
ηLB 100%