

Marici 195 White TW






Tunable white LED downlight met lage inbouwhoogte en gesatineerde PS Microprisma afscherming. Brede bundel (>73°) en lage verblinding op maximaal vermogen (UGR<18). Wit gelakte aluminium reflector. Tunable white - dynamisch mengen van licht kleur tussen 2700K en 6500K (CRI>92). Wit gelakte (RAL 9003) aluminium behuizing. Zeer geschikt als basis verlichting in scholen, theaters en musea. Wordt geleverd inclusief externe DALI driver. Directe aansluiting op 220-240VAC. Kleurstabiliteit Mac Adam <3. Snelle en eenvoudige montage met veren. Onderhoudsvrij en hoge levensduurverwachting (60.000 uur L90B10). Vijf jaar garantie.

Tunable white modular LED downlight with a satinated PS Microprism diffuser. Wide beam angle (>73°) and low glare at maximum power (UGR<18). white painted aluminum reflector. Tunable white - dynamic mixing of light colour, linear colour mixing between 2700K and 6500K (CRI>92). White painted aluminum die cast body (RAL9003). Very suitable as general lighting in schools, theatres and museums. Delivered including external DALI driver. Direct connection to 220-240VAC. Colour stability, Mac Adam <3. Low maintenance and high life expectancy (60.000 hours L90B10). Fast and easy mounting with springs. Five years warranty.

Wattage Watts	Kleur Colour	Lumen* Lumen*	CRI CRI	Gewicht (kg) Weight (kg)	Noodvoorz. (u) Emergency (h)	Artikel nr. Article no.	Casambi Casambi
13w	2700-6500k	1150-1340	>92	1,3	1/3	62009W.13.TWW	62009W.13.TWWC
19w	2700-6500k	1570-1835	>92	1,3	1/3	62009W.19.TWW	62009W.19.TWWC
27w	2700-6500k	2220-2615	>92	1,3	1/3	62009W.27.TWW	62009W.27.TWWC
32w	2700-6500k	2680-3080	>92	1,3	1/3	62009W.32.TWW	62009W.32.TWWC
37w	2700-6500k	3060-3580	>92	1,3	1/3	62009W.37.TWW	62009W.37.TWWC
48w	2700-6500k	3850-4515	>92	1,3	1/3	62009W.48.TWW	62009W.48.TWWC

* Lichtstroom van armatuur, tolerantie van +/- 10%

* Luminaire luminous flux, tolerance of +/- 10%

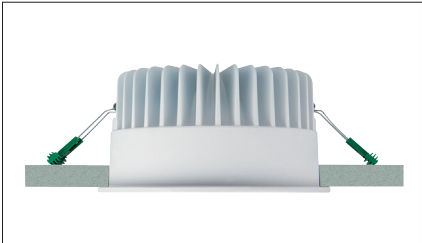

INBOUW DOWNLIGHTS RECESSED DOWNLIGHTS




Opties:

- GST18i5® connector
- Andere RAL kleur
- IP65

Options:

- GST18i5® connector
- Different RAL color
- IP65



62009W.13.TWW
13w 2700-6500K 1150-1340lm
ηLB 74%

melis lighting

