Marici 205-190 FACET SUSPENDED


Ronde LED pendel downlight. Voorzien van decoratieve aluminium (99,9%) semi matte facet reflector (UGR<19 - <3000lm). Zeer brede bundel (71,3°) en hoge efficiency (max 163lm/w) met **CRI>93 (R9>88)**. Wit gelakte (RAL 9003) stalen behuizing. Wordt geleverd inclusief interne driver. Directe aansluiting op netspanning. Zeer geschikt als basis verlichting in gangen, kantoren, vides, kerken en moskeeën. Inclusief 3 meter snoer. Snelle en eenvoudige montage. Onderhoudsarm en hoge levensduurverwachting (L90B10 180.000 uur). Hoge kleurconsistentie SDCM <2.
Vijf jaar garantie.

Round suspended LED downlight. Semi matt faceted aluminum reflector(99,9%) (UGR<19 - <3000lm). Extra wide beam angle (71,3°) and high efficiency (max 163lm/w) with **CRI>93 (R9>88)**. *White painted steel body (RAL9003). Very suitable as general lighting in hallways, offices, high rooms like lobby's, churches and mosques. Delivered including internal driver and 3 meter cable. Direct connection to mains. Low maintenance and high life expectancy (L90B10 180.000 hours). High color consistency SDCM <2. Five years warranty.*


Wattage *Watts*	**Kleur** *Colour*	**Lumen*** *Lumen**	**CRI** *CRI*	**Amperage (mA)** *Amperage (mA)*	**Gewicht (kg)** *Weight (kg)*	**Noodvoorz. (u)** *Emergency (h)*	**Artikel nr.** *Article no.*	**Dimbaar (1-10V)** *Dimmable (1-10V)*	**Dali-2** *Dali-2*	**Casambi** *Casambi*
5w	3000k	817	>93	150	3,0	1/3	62020WPNS.00F	62020WPNS.01F	62020WPNS.02F	62020WPNS.05F
8w	3000k	1356	>93	250	3,0	1/3	62020WPN.00F	62020WPN.01F	62020WPN.02F	62020WPN.05F
12w	3000k	1881	>93	350	3,0	1/3	62006WPN.00F	62006WPN.01F	62006WPN.02F	62006WPN.05F
17w	3000k	2647	>93	500	3,0	1/3	62017WPN.00F	62017WPN.01F	62017WPN.02F	62017WPN.05F
25w	3000k	3618	>93	700	3,0	1/3	62010WPN.00F	62010WPN.01F	62010WPN.02F	62010WPN.05F
33w	3000k	4539	>93	900	3,0	1/3	62015WPN.00F	62015WPN.01F	62015WPN.02F	62015WPN.05F
5w	4000k	817	>93	150	3,0	1/3	62021WPNS.00F	62021WPNS.01F	62021WPNS.02F	62021WPNS.05F
8w	4000k	1356	>93	250	3,0	1/3	62021WPN.00F	62021WPN.01F	62021WPN.02F	62021WPN.05F
12w	4000k	1881	>93	350	3,0	1/3	62007WPN.00F	62007WPN.01F	62007WPN.02F	62007WPN.05F
17w	4000k	2647	>93	500	3,0	1/3	62018WPN.00F	62018WPN.01F	62018WPN.02F	62018WPN.05F
25w	4000k	3618	>93	700	3,0	1/3	62012WPN.00F	62012WPN.01F	62012WPN.02F	62012WPN.05F
33w	4000k	4539	>93	900	3,0	1/3	62016WPN.00F	62016WPN.01F	62016WPN.02F	62016WPN.05F

* Lichtstroom van armatuur, tolerantie van +/- 10%

* *Luminaire luminous flux, tolerance of +/- 10%*






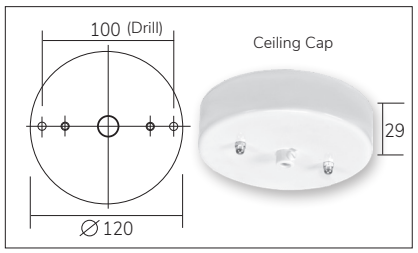



Opties:
- Vlees, Brood of Crisp white
- 2700k of 3500k

Opties:
- Meat, Bread or Crisp white
- 2700k or 3500k



23013WPN.05.30F
5w 3000k 828lm
ηLB 100%

melis lighting