

Marici 205-190 MATT SUSPENDED




Extreem krachtige ronde LED pendel downlight. Voorzien van decoratieve aluminium (99,9%) matte reflector (UGR<18). Gesatineerde PS Microprisma afscherming voor extra comfort. Zeer brede bundel (>74,0°) en hoge efficiency (max 123lm/w) met CRI>80. Wit gelakte (RAL 9003) stalen behuizing. Wordt geleverd inclusief interne driver. Directe aansluiting op netspanning. Zeer geschikt als basis verlichting in gangen, kantoren, vides, kerken en moskeeën. Inclusief 3 meter snoer. Snelle en eenvoudige montage. Onderhoudsarm en hoge levensduurverwachting. Kleur stabiliteit, Mac Adam <3. Vijf jaar garantie.

Powerful round suspended LED downlight. High gloss aluminium reflector (99,9%) with matt (M) finish (UGR<18). Extra wide beam angle (>74,0°) and high efficiency (max 123lm/w) with CRI>80. Satinated PS Microprism diffuser for high comfort. White painted steel body (RAL9003). Direct connection to mains. Very suitable as general lighting in hallways, offices, high rooms like lobby's, churches and mosques. Including 3 meter cable. Low maintenance and high life expectancy. Colour stability, Mac Adam <3. Fast and easy mounting. Five years warranty.

Wattage Watts	Kleur Colour	Lumen* Lumen*	Amperage (mA) Amperage (mA)	kg	Noodvoorz. (u) Emergency (h)	Artikel nr. Article no.	Dimbaar (1-10V) Dimmable (1-10V)	Dali Dali	Casambi Casambi
9w	3000k	1110	250	2,8	1	62020WPN.00-M	62020WPN.01-M	62020WPN.02-M	62020WPN.05-M
12w	3000k	1545	350	2,8	1	62006WPN.00-M	62006WPN.01-M	62006WPN.02-M	62006WPN.05-M
18w	3000k	2160	500	2,8	1	62017WPN.00-M	62017WPN.01-M	62017WPN.02-M	62017WPN.05-M
25w	3000k	2950	700	2,8	1	62010WPN.00-M	62010WPN.01-M	62010WPN.02-M	62010WPN.05-M
33w	3000k	3690	900	2,8	1	62015WPN.00-M	62015WPN.01-M	62015WPN.02-M	62015WPN.05-M
9w	4000k	1170	250	2,8	1	62021WPN.00-M	62021WPN.01-M	62021WPN.02-M	62021WPN.05-M
12w	4000k	1625	350	2,8	1	62007WPN.00-M	62007WPN.01-M	62007WPN.02-M	62007WPN.05-M
18w	4000k	2270	500	2,8	1	62018WPN.00-M	62018WPN.01-M	62018WPN.02-M	62018WPN.05-M
25w	4000k	3100	700	2,8	1	62012WPN.00-M	62012WPN.01-M	62012WPN.02-M	62012WPN.05-M
33w	4000k	3875	900	2,8	1	62016WPN.00-M	62016WPN.01-M	62016WPN.02-M	62016WPN.05-M

* Lichtstroom van armatuur, tolerantie van +/- 10%

* Luminaire luminous flux, tolerance of +/- 10%

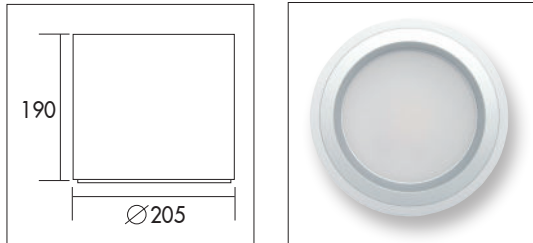

PENDEL ARMATUREN / SUSPENDED LUMINAIRES



Opties:


- Vlees, Brood of Crisp white (2700k of 3500k)
- 90CRI of 97CRI

Opties:

- Meat, Bread or Crisp white (2700k or 3500k)
- 90CRI or 97CRI

Levensduurverwachting (uren) Life expectancy (hours)

Watt	L90B10
9	79.000
12	78.000
18	70.000
25	64.000
33	57.000



62006WPN.00-M

12w 3000k 1545lm
ηLB 73%