

Marici 240 Darklight






Ronde LED downlight met een lage inbouwhoogte. Voorzien van trompetvormige darklight reflector van 99,98% hoogglans aluminium met brede bundel (>79°) en hoge efficiency (max 177lm/w) met **CRI>93**. Zeer lage verblinding (UGR<19, 9-18w) en minimale helderheid door uniek darklight reflector ontwerp. Wit gelakte (RAL 9003) aluminium behuizing. Wordt geleverd inclusief externe driver. Directe aansluiting op 220-240VAC. Snelle en eenvoudige montage met veren. Onderhoudsarm en hoge levensduurverwachting. Hoge kleurconsistentie SDCM <2. Vijf jaar garantie.

Round LED downlight with shallow build-in height. Trumpet shaped darklight reflector made of 99,98% specular aluminium with wide beam angle (>79°) with high efficiency (max 177lm/w) and **CRI>93**. Very low glare (UGR<19, 9-18w) and minimal brightness due to unique darklight reflector design. White painted die cast aluminium body (RAL9003). Delivered including external driver. Direct connection to 220-240VAC. Low maintenance and high life expectancy. High color consistency SDCM <2. Fast and easy mounting with springs. Five years warranty.

Wattage Watts	Kleur Colour	Lumen* Lumen*	CRI CRI	Amperage (mA) Amperage (mA)	kg	Noodvoorz. (u) Emergency (h)	Artikel nr. Article no.	Dimbaar (1-10V) Dimmable (1-10V)	Dali-2 Dali-2	Casambi Casambi
5w	3000k	841	>93	150	1,3	1/3	62022W.05.30.DK	62022W.05.31.DK	62022W.05.32.DK	62022W.05.35.DK
9w	3000k	1395	>93	250	1,3	1/3	62022W.09.30.DK	62022W.09.31.DK	62022W.09.32.DK	62022W.09.35.DK
12w	3000k	1935	>93	350	1,3	1/3	62022W.12.30.DK	62022W.12.31.DK	62022W.12.32.DK	62022W.12.35.DK
18w	3000k	2723	>93	500	1,3	1/3	62022W.18.30.DK	62022W.18.31.DK	62022W.18.32.DK	62022W.18.35.DK
26w	3000k	3723	>93	700	1,3	1/3	62022W.26.30.DK	62022W.26.31.DK	62022W.26.32.DK	62022W.26.35.DK
34w	3000k	4671	>93	900	1,3	1/3	62022W.34.30.DK	62022W.34.31.DK	62022W.34.32.DK	62022W.34.35.DK
40w	3000k	5313	>93	1050	1,3	1/3	62022W.40.30.DK	62022W.40.31.DK	62022W.40.32.DK	62022W.40.35.DK
5w	4000k	841	>93	150	1,3	1/3	62022W.05.40.DK	62022W.05.41.DK	62022W.05.42.DK	62022W.05.45.DK
9w	4000k	1395	>93	250	1,3	1/3	62022W.09.40.DK	62022W.09.41.DK	62022W.09.42.DK	62022W.09.45.DK
12w	4000k	1935	>93	350	1,3	1/3	62022W.12.40.DK	62022W.12.41.DK	62022W.12.42.DK	62022W.12.45.DK
18w	4000k	2723	>93	500	1,3	1/3	62022W.18.40.DK	62022W.18.41.DK	62022W.18.42.DK	62022W.18.45.DK
26w	4000k	3723	>93	700	1,3	1/3	62022W.26.40.DK	62022W.26.41.DK	62022W.26.42.DK	62022W.26.45.DK
34w	4000k	4671	>93	900	1,3	1/3	62022W.34.40.DK	62022W.34.41.DK	62022W.34.42.DK	62022W.34.45.DK
40w	4000k	5313	>93	1050	1,3	1/3	62022W.40.40.DK	62022W.40.41.DK	62022W.40.42.DK	62022W.40.45.DK

* Lichtstroom van armatuur, tolerantie van +/- 10%

* Luminaire luminous flux, tolerance of +/- 10%

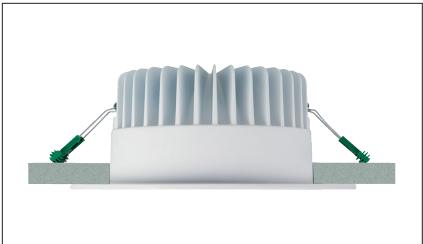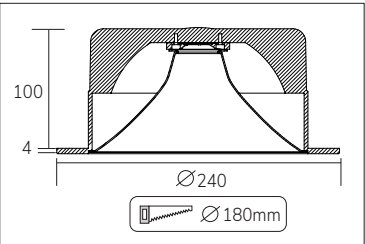


INBOUW DOWNLIGHTS RECESSED DOWNLIGHTS



- Opties:**
- 1,5 meter snoer met 3-polige Shuko stekker
 - 0,5 meter snoer + GST18i3® connector (niet - dimbaar)
 - 0,5 meter snoer + GST18i3® and BST14i2 connector (dim)
 - 0,5 meter snoer + GST18i5® Blue connector male (dim)
 - Andere RAL kleur
 - 2700K, 3500k, 5000k of hogere CRI waarde 90/97
 - Vlees, brood of Crisp White

- Options:**
- 1,5m cable with Shuko 3-pin plug
 - 0,5 meter cable + GST18i3® connector (non - dimmable)
 - 0,5 meter cable + GST18i3® and BST14i2 connector (dim)
 - 0,5 meter cable + GST18i5® Blue connector male (dim)
 - Different RAL color
 - 2700k, 3500k, 5000k or higher CRI values 90/97
 - Meat, bread or Crisp White



62022W.05.30.DK
5w 3000k 841lm
ηLB 100%

melis lighting

