

# Marici 240 EasySense Specular





Ronde LED downlight met een lage inbouwhoogte. Voorzien van decoratieve aluminium (99,9%) hoogglans reflector (UGR<18). Gesatineerde PS Microprisma afscherming voor extra comfort. Zeer geschikt als basis verlichting in gangen of kantoren. Zeer brede bundel (74,0°) en hoge efficiency (max 123lm/w) met CRI>80. Wit gelakte (RAL 9003) aluminium behuizing. Wordt geleverd inclusief externe driver. De EasySense-sensor combineert beweging- en daglichtregeling. Tot 40 sensoren kunnen draadloos worden gegroepeerd. Snelle en eenvoudige montage met veren. Directe aansluiting op 220-240VAC. Onderhoudsarm en hoge levensduurverwachting. Kleur stabiliteit, Mac Adam <3. Vijf jaar garantie.

Round LED downlight with shallow build-in height. High gloss aluminium reflector (99,9%) with specular finish (UGR<18). Extra wide beam angle (74,0°) and high efficiency (max 123lm/w) with CRI>80. Satinated PS Microprism diffuser for high comfort. White painted aluminium die cast body (RAL9003). Very suitable as general lighting in hallways and offices. Delivered including external driver. The EasySense sensor combines occupancy sensing, daylight harvesting and task tuning. Up to 40 sensors can be grouped wireless. Direct connection to 220-240VAC. Low maintenance and high life expectancy. Colour stability, Mac Adam <3. Fast and easy mounting with springs. Five years warranty.

Wattage Watts	Kleur Colour	Lumen* Lumen*	Amperage (mA) Amperage (mA)	Gewicht (kg) Weight (kg)	Noodvoorz. (u) Emergency (h)	Artikel nr. Article no.
9w	3000k	1215	250	1,4	1/3	62023W.0930
12w	3000k	1695	350	1,4	1/3	62023W.1230
18w	3000k	2370	500	1,4	1/3	62023W.1830
25w	3000k	3235	700	1,4	1/3	62023W.2530
33w	3000k	4045	900	1,4	1/3	62023W.3330
39w	3000k	4655	1050	1,4	1/3	62023W.3930
9w	4000k	1280	250	1,4	1/3	62023W.0940
12w	4000k	1780	350	1,4	1/3	62023W.1240
18w	4000k	2490	500	1,4	1/3	62023W.1840
25w	4000k	3395	700	1,4	1/3	62023W.2540
33w	4000k	4250	900	1,4	1/3	62023W.3340
39w	4000k	4810	1050	1,4	1/3	62023W.3940

\* Lichtstroom van armatuur, tolerantie van +/- 10%

\* Luminaire luminous flux, tolerance of +/- 10%

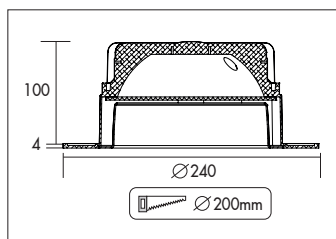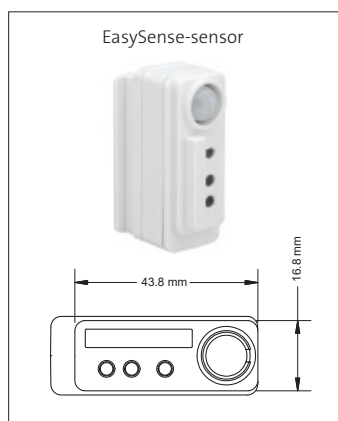

## INBOUW DOWNLIGHTS RECESSED DOWNLIGHTS



### Opties:

- 1,5 meter snoer met 3-polige Shuko stekker
- 0,5 meter snoer + GST18i3® connector
- Andere RAL kleur
- 2700K, 3500k, 5000k of hogere CRI waarde 90/97
- Vlees, brood of Crisp White
- IP65


### Options:

- 1,5m cable with Shuko 3-pin plug
- 0,5 meter cable + GST18i3® connector
- Different RAL color
- 2700k, 3500k, 5000k or higher CRI values 90/97
- Meat, bread or Crisp White
- IP65



### Levensduurverwachting (uren) Life expectancy (hours)

Watt	L80B10	L90B10
9	168.000	79.000
12	166.000	78.000
18	149.000	70.000
25	135.000	64.000
33	120.000	57.000
39	115.000	54.000



### 62023W.1230

12w 3000k 1695lm  
ηLB 79%

**melis lighting**