Marici 240 Facet

DALI-2 | PF>0,95 | MAX 50 mm | IP44-65 | RoHS


Ronde LED downlight met een lage inbouwhoogte. Voorzien van decoratieve aluminium (99,9%) semi matte facet reflector (UGR<19 - <3000lm). Zeer brede bundel (71,3°) en hoge efficiency (max 149lm/w) met **CRI>93 (R9>88)**. Wit gelakte (RAL 9003) aluminium behuizing. Zeer geschikt als basis verlichting in gangen of kantoren. Wordt geleverd inclusief externe driver. Directe aansluiting op 220-240VAC. Snelle en eenvoudige montage met veren. Onderhoudsarm en hoge levensduurverwachting (L90B10 180.000 uur). Hoge kleurconsistentie SDCM <2. Vijf jaar garantie.

Round LED downlight with shallow build-in height. Semi matt faceted aluminum reflector (99,9%) (UGR<19 - <3000lm). Extra wide beam angle (71,3°) and high efficiency (max 149lm/w) with **CRI>93 (R9>88)**. *White painted aluminum die cast body (RAL9003). Very suitable as general lighting in hallways and offices. Delivered including external driver. Direct connection to 220-240VAC. Fast and easy mounting with springs. Low maintenance and high life expectancy (L90B10 180.000 hours). High color consistency SDCM <2. Five years warranty.*


Wattage *Watts*	**Kleur** *Colour*	**Lumen*** *Lumen**	**CRI** *CRI*	**Amperage (mA)** *Amperage (mA)*	**kg** *kg*	**Noodvoorz. (u)** *Emergency (h)*	**Artikel nr.** *Article no.*	**Dimbaar (1-10V)** *Dimmable (1-10V)*	**Dali-2** *Dali-2*	**Casambi** *Casambi*
5w	3000k	817	>93	150	1,3	1/3	62022W.05.30F	62022W.05.31F	62022W.05.32F	62022W.05.35F
8w	3000k	1356	>93	250	1,3	1/3	62022W.08.30F	62022W.08.31F	62022W.08.32F	62022W.08.35F
12w	3000k	1881	>93	350	1,3	1/3	62022W.12.30F	62022W.12.31F	62022W.12.32F	62022W.12.35F
17w	3000k	2647	>93	500	1,3	1/3	62022W.17.30F	62022W.17.31F	62022W.17.32F	62022W.17.35F
25w	3000k	3618	>93	700	1,3	1/3	62022W.25.30F	62022W.25.31F	62022W.25.32F	62022W.25.35F
33w	3000k	4539	>93	900	1,3	1/3	62022W.33.30F	62022W.33.31F	62022W.33.32F	62022W.33.35F
39w	3000k	5163	>93	1050	1,3	1/3	62022W.39.30F	62022W.39.31F	62022W.39.32F	62022W.39.35F
F										
5w	4000k	817	>93	150	1,3	1/3	62022W.05.40F	62022W.05.41F	62022W.05.42F	62022W.05.45F
8w	4000k	1356	>93	250	1,3	1/3	62022W.08.40F	62022W.08.41F	62022W.08.42F	62022W.08.45F
12w	4000k	1881	>93	350	1,3	1/3	62022W.12.40F	62022W.12.41F	62022W.12.42F	62022W.12.45F
17w	4000k	2647	>93	500	1,3	1/3	62022W.17.40F	62022W.17.41F	62022W.17.42F	62022W.17.45F
25w	4000k	3618	>93	700	1,3	1/3	62022W.25.40F	62022W.25.41F	62022W.25.42F	62022W.25.45F
33w	4000k	4539	>93	900	1,3	1/3	62022W.33.40F	62022W.33.41F	62022W.33.42F	62022W.33.45F
39w	4000k	5163	>93	1050	1,3	1/3	62022W.39.40F	62022W.39.41F	62022W.39.42F	62022W.39.45F


* Lichtstroom van armatuur, tolerantie van +/- 10%

* *Luminaire luminous flux, tolerance of +/- 10%*

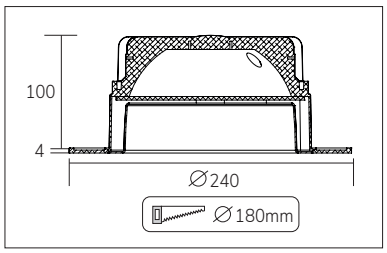



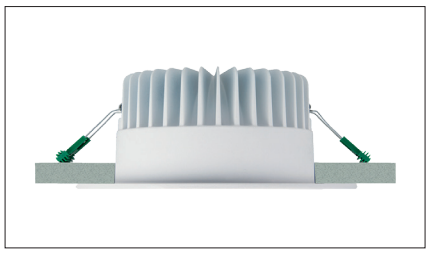






Opties:
- 1,5 meter snoer met 3-polige Shuko stekker
- 0,5 meter snoer + GST18i3® connector (niet - dimbaar)
- 0,5 meter snoer + GST18i3® and BST14i2 connector (dim)
- 0,5 meter snoer + GST18i5® Blue connector male (dim)
- Andere RAL kleur
- 2700K, 3500k, 5000k of hogere CRI waarde 90/97
- Vlees, brood of Crisp White
- IP65

Options:
- *1,5m cable with Shuko 3-pin plug*
- *0,5 meter cable + GST18i3® connector (non - dimmable)*
- *0,5 meter cable + GST18i3® and BST14i2 connector (dim)*
- *0,5 meter cable + GST18i5® Blue connector male (dim)*
- *Different RAL color*
- *2700k, 3500k, 5000k or higher CRI values 90/97*
- *Meat, bread or Crisp White*
- *IP65*





62022F.05.30
5w 3000k 817lm
ηLB 100%

melis lighting