

Marici 240 Matt RGB-TW






RGB en Tunable white LED downlight met lage inbouwhoogte en gesatineerde PS Microprisma afscherming. Brede bundel (>74°) en lage verblinding op maximaal vermogen (UGR<18). Matte aluminium reflector. Voorzien van dimbaar RGB + tunable white LED technology (>100lm/w, 2500-7000k, CRI>90). Aanstuurbaar via DALI DT8 (slechts 1 BUS adres). RGB dimming 0-100%, CCT dimming 5-100%. Wit gelakte (RAL 9003) aluminium behuizing. Zeer geschikt als basis verlichting in scholen, theaters en musea. Inclusief DALI driver. Directe aansluiting op 48VDC of 220-240VAC. Zeer hoge initiële kleurstabiliteit Mac Adam <1. Snelle en eenvoudige montage met veren. Onderhoudsvrij en hoge levensduurverwachting (50.000 uur L90B10). Vijf jaar garantie.

RGB and tunable white modular LED downlight with low build-in height and a satinated PS Microprism diffuser. Wide beam angle (>74°) and low glare at maximum power (UGR<18). Matt aluminum reflector. Build-in RGB + tuneable white LED technology (>100lm/w, 2500-7000k, CRI>90). RGB dimming 0-100%, CCT dimming 5-100%. Controllable over DALI DT8 protocol (only 1 bus adress per luminaire). White painted aluminium die cast body (RAL9003). Ideal for schools, museums, theaters and hospitals. Including DALI driver. Direct connection to 48VDC or 220-240VAC. Very high initial colour stability, Mac Adam <1. Low maintenance and high life expectancy (50.000 hours L90B10). Fast and easy mounting with springs. Five years warranty.


Wattage Watts	Lumen* Lumen*	CRI CRI	Gewicht (kg) Weight (kg)	48VDC 48VDC	220-240VAC 220-240VAC	Casambi Casambi
22w	1680	>90	1,5	62022W.22D.RGBM	62022W.22A.RGBM	62022W.22C.RGBM
31w	2190	>90	1,5	62022W.31D.RGBM	62022W.31A.RGBM	62022W.31C.RGBM
50w	2920	>90	1,5	62022W.50D.RGBM	62022W.50A.RGBM	62022W.50C.RGBM

* Lichtstroom van armatuur, tolerantie van +/- 10%

* Luminaire luminous flux, tolerance of +/- 10%

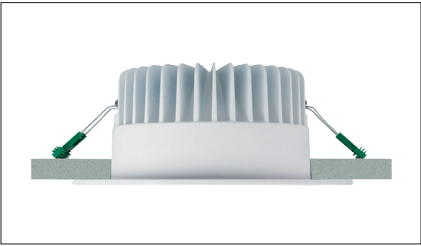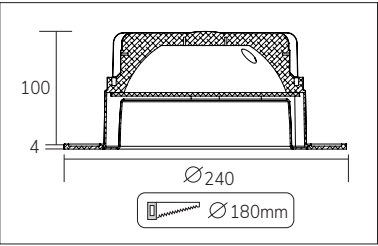


INBOUW DOWNLIGHTS RECESSED DOWNLIGHTS

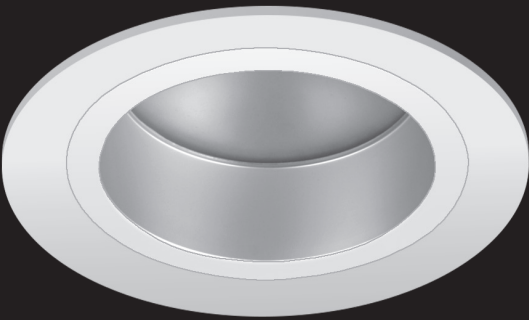

- Opties:**
- GST18i3® connector + BST14i2 connector
 - GST18i5® connector
 - Andere RAL kleur
 - IP65

- Options:**
- GST18i3® connector + BST14i2 connector
 - GST18i5® connector
 - Different RAL color
 - IP65



62022W.31D.RGBM
31w 2190lm
ηLB 73%

melis lighting