




 Tunable white LED downlight met lage inbouwhoogte en gesatineerde PS Microprisma afscherming. Brede bundel (>74°) en lage verblinding op maximaal vermogen (UGR<19). Matte aluminium reflector. Tunable white - dynamisch mengen van licht kleur tussen 2700K en 6500K. Wit gelakte (RAL 9003) aluminium behuizing. Zeer geschikt als basis verlichting in scholen, theaters en musea. Wordt geleverd inclusief externe DALI driver. Directe aansluiting op 220-240VAC. Kleurstabiliteit Mac Adam <3. Snelle en eenvoudige montage met veren. Onderhoudsvrij en hoge levensduurverwachting (60.000 uur L90B10). Vijf jaar garantie.

Tunable white modular LED downlight with a satinated PS Microprism diffuser. Wide beam angle (>74°) and low glare at maximum power (UGR<19). Matt aluminum reflector. Tunable white - dynamic mixing of light colour, linear colour mixing between 2700K and 6500k. White painted aluminium die cast body (RAL9003). Very suitable as general lighting in schools, theatres and museums. Delivered including external DALI driver. Direct connection to 220-240VAC. Colour stability, Mac Adam <3. Low maintenance and high life expectancy (60.000 hours L90B10). Fast and easy mounting with springs. Five years warranty.

Wattage Watts	Kleur Colour	Lumen* Lumen*	CRI CRI	Gewicht (kg) Weight (kg)	Noodvoorz. (u) Emergency (h)	Dali Dali	Casambi Casambi
13w	2700-6500k	1130-1320	>92	1,3	1/3	62022W.13.TWM	62022W.13.TWMC
21w	2700-6500k	1545-1810	>92	1,3	1/3	62022W.21.TWM	62022W.21.TWMC
27w	2700-6500k	2190-2575	>92	1,3	1/3	62022W.27.TWM	62022W.27.TWMC
32w	2700-6500k	2645-3035	>92	1,3	1/3	62022W.32.TWM	62022W.32.TWMC
37w	2700-6500k	3015-3535	>92	1,3	1/3	62022W.37.TWM	62022W.37.TWMC
48w	2700-6500k	3795-4455	>92	1,3	1/3	62022W.48.TWM	62022W.48.TWMC


* Lichtstroom van armatuur, tolerantie van +/- 10%

* Luminaire luminous flux, tolerance of +/- 10%

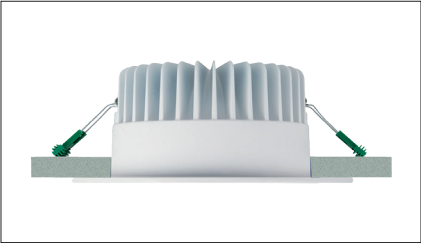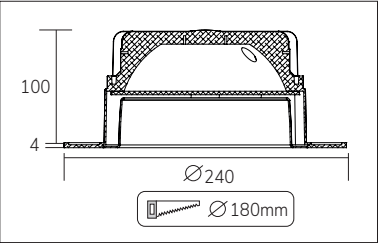


INBOUW DOWNLIGHTS

RECESSED DOWNLIGHTS

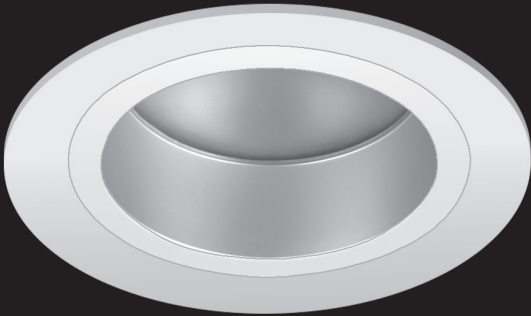

- Opties:**
- GST18i5® connector
 - Andere RAL kleur
 - IP65

- Options:**
- GST18i5® connector
 - Different RAL color
 - IP65



62022W.13.TWM
13w 2700-6500K 1130-1320lm
ηLB 73%