

Marici 240 Matt






Ronde LED downlight met een lage inbouwhoogte. Voorzien van decoratieve aluminium (99,9%) matte reflector (UGR<18). Gesatineerde PS Microprisma afscherming voor extra comfort. Zeer geschikt als basis verlichting in gangen of kantoren. Zeer brede bundel (74,0°) en hoge efficiency (max 131lm/w) met **CRI>93**. Wit gelakte (RAL 9003) aluminium behuizing. Wordt geleverd inclusief externe driver. Snelle en eenvoudige montage met veren. Directe aansluiting op 220-240VAC. Onderhoudsarm en hoge levensduurverwachting. Hoge kleurconsistentie SDCM <2. Vijf jaar garantie.

Round LED downlight with shallow build-in height. High gloss aluminium reflector (99,9%) with matt finish (UGR<18). Extra wide beam angle (74,0°) and high efficiency (max 131lm/w) with **CRI>93**. Satinated PS Microprism diffuser for high comfort. White painted aluminium die cast body (RAL9003). Very suitable as general lighting in hallways and offices. Delivered including external driver. Direct connection to 220-240VAC. Low maintenance and high life expectancy. High color consistency SDCM <2. Fast and easy mounting with springs. Five years warranty.


Wattage Watts	Kleur Colour	Lumen* Lumen*	CRI CRI	Amperage (mA) Amperage (mA)	kg kg	Noodvoorz. (u) Emergency (h)	Artikel nr. Article no.	Dimbaar (1-10V) Dimmable (1-10V)	Dali-2 Dali-2	Casambi Casambi
5w	3000k	620	>93	150	1,3	1/3	62022W.05.30.M	62022W.05.31.M	62022W.05.32.M	62022W.05.35.M
8w	3000k	1029	>93	250	1,3	1/3	62022W.09.30.M	62022W.09.31.M	62022W.09.32.M	62022W.09.35.M
12w	3000k	1428	>93	350	1,3	1/3	62022W.12.30.M	62022W.12.31.M	62022W.12.32.M	62022W.12.35.M
17w	3000k	2008	>93	500	1,3	1/3	62022W.17.30.M	62022W.17.31.M	62022W.17.32.M	62022W.17.35.M
25w	3000k	2746	>93	700	1,3	1/3	62022W.25.30.M	62022W.25.31.M	62022W.25.32.M	62022W.25.35.M
33w	3000k	3445	>93	900	1,3	1/3	62022W.33.30.M	62022W.33.31.M	62022W.33.32.M	62022W.33.35.M
39w	3000k	3918	>93	1050	1,3	1/3	62022W.39.30.M	62022W.39.31.M	62022W.39.32.M	62022W.39.35.M
5w	4000k	620	>93	150	1,3	1/3	62022W.05.40.M	62022W.05.41.M	62022W.05.42.M	62022W.05.45.M
8w	4000k	1029	>93	250	1,3	1/3	62022W.09.40.M	62022W.09.41.M	62022W.09.42.M	62022W.09.45.M
12w	4000k	1428	>93	350	1,3	1/3	62022W.12.40.M	62022W.12.41.M	62022W.12.42.M	62022W.12.45.M
17w	4000k	2008	>93	500	1,3	1/3	62022W.17.40.M	62022W.17.41.M	62022W.17.42.M	62022W.17.45.M
25w	4000k	2746	>93	700	1,3	1/3	62022W.25.40.M	62022W.25.41.M	62022W.25.42.M	62022W.25.45.M
33w	4000k	3445	>93	900	1,3	1/3	62022W.33.40.M	62022W.33.41.M	62022W.33.42.M	62022W.33.45.M
39w	4000k	3918	>93	1050	1,3	1/3	62022W.39.40.M	62022W.39.41.M	62022W.39.42.M	62022W.39.45.M

* Lichtstroom van armatuur, tolerantie van +/- 10%

* Luminaire luminous flux, tolerance of +/- 10%

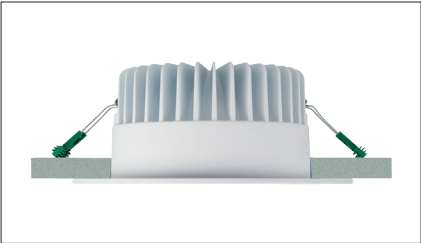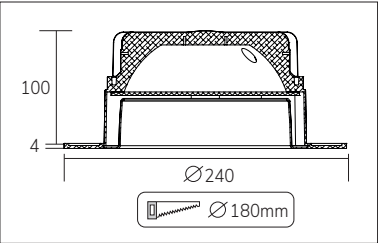


INBOUW DOWNLIGHTS RECESSED DOWNLIGHTS

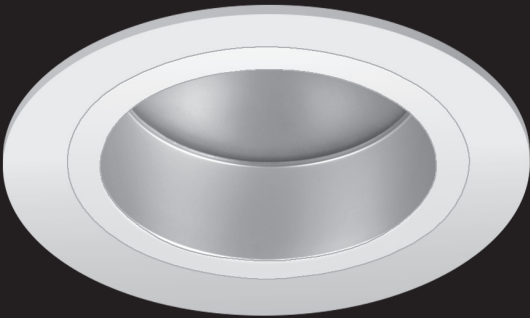

- Opties:**
- 1,5 meter snoer met 3-polige Shuko stekker
 - 0,5 meter snoer + GST18i3® connector (niet - dimbaar)
 - 0,5 meter snoer + GST18i3® and BST14i2 connector (dim)
 - 0,5 meter snoer + GST18i5® Blue connector male (dim)
 - Andere RAL kleur
 - 2700K, 3500k, 5000k of hogere CRI waarde 90/97
 - Vlees, brood of Crisp White
 - IP65

- Options:**
- 1,5m cable with Shuko 3-pin plug
 - 0,5 meter cable + GST18i3® connector (non - dimmable)
 - 0,5 meter cable + GST18i3® and BST14i2 connector (dim)
 - 0,5 meter cable + GST18i5® Blue connector male (dim)
 - Different RAL color
 - 2700k, 3500k, 5000k or higher CRI values 90/97
 - Meat, bread or Crisp White
 - IP65



62022W.05.30.M
5w 3000k 620lm
ηLB 100%