

# Marici 240 Specular RGB-TW





RGB en Tunable white LED downlight met lage inbouwhoogte en gesatineerde PS Microprisma afscherming. Brede bundel (83°) en lage verblinding op maximaal vermogen (UGR<19). Hoogglans aluminium reflector. Voorzien van dimbaar RGB + tunable white LED technology (>100lm/w, 2500-7000k, CRI>90). Aanstuurbaar via DALI DT8 (slechts 1 BUS adres). RGB dimming 0-100%, CCT dimming 5-100%. Wit gelakte (RAL 9003) aluminium behuizing. Zeer geschikt als basis verlichting in scholen, theaters en musea. Inclusief DALI driver. Directe aansluiting op 48VDC of 220-240VAC. Zeer hoge initiële kleurstabiliteit Mac Adam <1. Snelle en eenvoudige montage met veren. Onderhoudsvrij en hoge levensduurverwachting (50.000 uur L90B10). Vijf jaar garantie.

RGB and tunable white modular LED downlight with low build-in height and a satinated PS Microprism diffuser. Wide beam angle (83°) and low glare at maximum power (UGR<19). Specular aluminum reflector. Build-in RGB + tuneable white LED technology (>100lm/w, 2500-7000k, CRI>90). RGB dimming 0-100%, CCT dimming 5-100%. Controllable over DALI DT8 protocol (only 1 bus adress per luminaire). White painted aluminum die cast body (RAL9003). Ideal for schools, museums, theaters and hospitals. Delivered including DALI driver. Direct connection to 48VDC or 220-240VAC. Very high initial colour stability, Mac Adam <1. Low maintenance and high life expectancy (50.000 hours L90B10). Fast and easy mounting with springs. Five years warranty.

Wattage Watts	Lumen* Lumen*	CRI CRI	Gewicht (kg) Weight (kg)	48VDC 48VDC	220-240VAC 220-240VAC	Casambi Casambi
22w	1840	>90	1,5	62022W.22D.RGB	62022W.22A.RGB	62022W.22C.RGB
31w	2400	>90	1,5	62022W.31D.RGB	62022W.31A.RGB	62022W.31C.RGB
50w	3200	>90	1,5	62022W.50D.RGB	62022W.50A.RGB	62022W.50C.RGB

\* Lichtstroom van armatuur, tolerantie van +/- 10%

\* Luminaire luminous flux, tolerance of +/- 10%

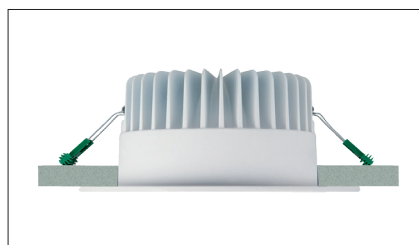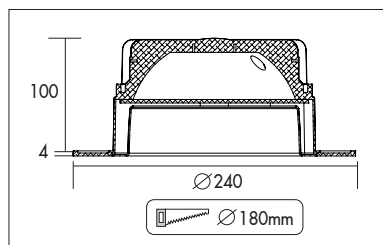

INBOUW DOWNLIGHTS RECESSED DOWNLIGHTS





#### Opties:

- GST18i3® connector + BST14i2 connector
- GST18i5® connector
- Andere RAL kleur
- IP65

#### Options:

- GST18i3® connector + BST14i2 connector
- GST18i5® connector
- Different RAL color
- IP65

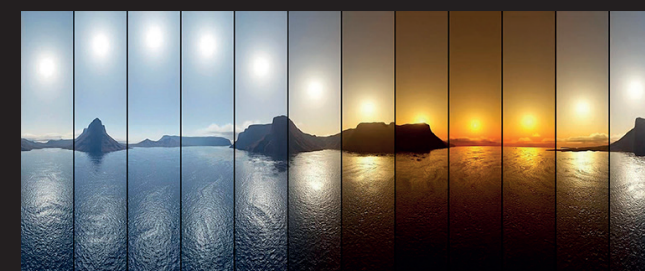

62022W.31D.RGB  
31w 2400lm  
ηLB 80%

melis lighting

