

Marici 240 Specular TW





Tunable white LED downlight met lage inbouwhoogte en gesatineerde PS Microprisma afscherming. Brede bundel (>83°) en lage verblinding op maximaal vermogen (UGR<19). Hoogglans aluminium reflector. Tunable white - dynamisch mengen van licht kleur tussen 2700K en 6500K (CRI>84). Wit gelakte (RAL 9003) aluminium behuizing. Zeer geschikt als basis verlichting in scholen, theaters en musea. Wordt geleverd inclusief externe DALI driver. Directe aansluiting op 220-240VAC. Kleurstabiliteit Mac Adam <3. Snelle en eenvoudige montage met veren. Onderhoudsvrij en hoge levensduurverwachting (60.000 uur L90B10). Vijf jaar garantie.

Tunable white modular LED downlight with satinated PS Microprism diffuser. Wide beam angle (>83°) and low glare at maximum power (UGR<19). Specular aluminium reflector. Tunable white - dynamic mixing of light colour, linear colour mixing between 2700K and 6500K (CRI>84). White painted aluminum die cast body (RAL9003). Very suitable as general lighting in schools, theatres and museums. Delivered including external DALI driver. Direct connection to 220-240VAC. Colour stability, Mac Adam <3. Low maintenance and high life expectancy (60.000 hours L90B10). Fast and easy mounting with springs. Five years warranty.

Wattage Watts	Kleur Colour	Lumen* Lumen*	CRI CRI	Gewicht (kg) Weight (kg)	Noodvoorz. (u) Emergency (h)	Dali Dali	Casambi Casambi
13w	2700-6500k	1240-1450	>92	1,3	1/3	62022W.13.TW	62022W.13.TWC
19w	2700-6500k	1695-1985	>92	1,3	1/3	62022W.19.TW	62022W.19.TWC
27w	2700-6500k	2400-2825	>92	1,3	1/3	62022W.27.TW	62022W.27.TWC
32w	2700-6500k	2895-3330	>92	1,3	1/3	62022W.32.TW	62022W.32.TWC
37w	2700-6500k	3305-3875	>92	1,3	1/3	62022W.37.TW	62022W.37.TWC
48w	2700-6500k	4160-4880	>92	1,3	1/3	62022W.48.TW	62022W.48.TWC

* Lichtstroom van armatuur, tolerantie van +/- 10%

* Luminaire luminous flux, tolerance of +/- 10%

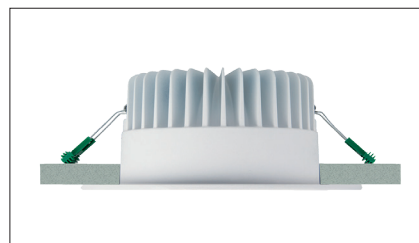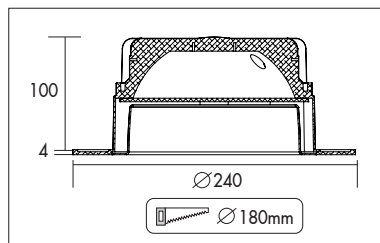

INBOUW DOWNLIGHTS RECESSED DOWNLIGHTS




Opties:

- GST18i5® connector
- Andere RAL kleur
- IP65

Options:

- GST18i5® connector
- Different RAL color
- IP65



62022W.13.TW

13w 2700-6500k 1240-1450lm
ηLB 80%

melis lighting

