

# Marici 240 Specular TW





Tunable white LED downlight met lage inbouwhoogte en gesatineerde PS Microprisma afscherming. Brede bundel (>83°) en lage verblinding op maximaal vermogen (UGR<19). Hoogglans aluminium reflector. Tunable white - dynamisch mengen van licht kleur tussen 2700K en 6500K. Wit gelakte (RAL 9003) aluminium behuizing. Zeer geschikt als basis verlichting in scholen, theaters en musea. Wordt geleverd inclusief externe DALI driver. Directe aansluiting op 220-240VAC. Kleurstabiliteit Mac Adam <3. Snelle en eenvoudige montage met veren. Onderhoudsvrij en hoge levensduurverwachting (60.000 uur L90B10). Vijf jaar garantie.

Tunable white modular LED downlight with satinated PS Microprism diffuser. Wide beam angle (>83°) and low glare at maximum power (UGR<19). Specular aluminium reflector. Tunable white - dynamic mixing of light colour, linear colour mixing between 2700K and 6500K. White painted aluminum die cast body (RAL9003). Very suitable as general lighting in schools, theatres and museums. Delivered including external DALI driver. Direct connection to 220-240VAC. Colour stability, Mac Adam <3. Low maintenance and high life expectancy (60.000 hours L90B10). Fast and easy mounting with springs. Five years warranty.

Wattage Watts	Kleur Colour	Lumen* Lumen*	CRI CRI	Gewicht (kg) Weight (kg)	Noodvoorz. (u) Emergency (h)	Dali Dali	Casambi Casambi
13w	2700-6500k	1240-1450	>92	1,3	1/3	62022W.13.TW	62022W.13.TWC
19w	2700-6500k	1695-1985	>92	1,3	1/3	62022W.19.TW	62022W.19.TWC
27w	2700-6500k	2400-2825	>92	1,3	1/3	62022W.27.TW	62022W.27.TWC
32w	2700-6500k	2895-3330	>92	1,3	1/3	62022W.32.TW	62022W.32.TWC
37w	2700-6500k	3305-3875	>92	1,3	1/3	62022W.37.TW	62022W.37.TWC
48w	2700-6500k	4160-4880	>92	1,3	1/3	62022W.48.TW	62022W.48.TWC

\* Lichtstroom van armatuur, tolerantie van +/- 10%

\* Luminaire luminous flux, tolerance of +/- 10%

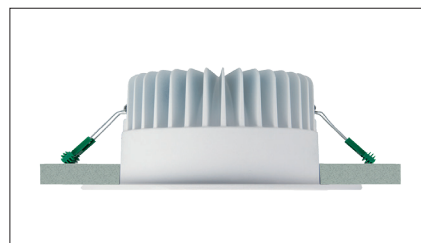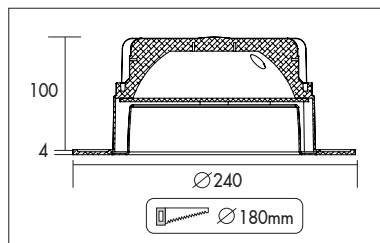

## INBOUW DOWNLIGHTS RECESSED DOWNLIGHTS



### Opties:

- GST18i5® connector
- Andere RAL kleur
- IP65


### Options:

- GST18i5® connector
- Different RAL color
- IP65

### Levensduurverwachting (uren)

Life expectancy (hours)

Watt	L80B10	L90B10
13	149.400	70.200
19	134.100	63.000
27	121.500	57.600
32	108.000	51.300
37	103.500	48.600



### 62022W.13.TW

13w 2700-6500k 1240-1450lm  
ηLB 80%

melis lighting

