

Marici 240 Specular



IP44-65





Ronde LED downlight met een lage inbouwhoogte. Voorzien van decoratieve aluminium (99,9%) hoogglans reflector (UGR<19). Gesatineerde PS Microprisma afscherming voor extra comfort. Zeer brede bundel (83°) en hoge efficiency (max 135lm/w) met CRI>80. Wit gelakte (RAL 9003) aluminium behuizing. Zeer geschikt als basis verlichting in gangen of kantoren. Wordt geleverd inclusief externe driver. Directe aansluiting op 220-240VAC. Onderhoudsarm en hoge levensduurverwachting. Kleur stabiliteit, Mac Adam <3. Vijf jaar garantie.

Round LED downlight with shallow build-in height. High gloss aluminium reflector (99,9%) (UGR<19) with specular finish. Extra wide beam angle (83°) and high efficiency (max 135lm/w) with CRI>80. Satinated PS Microprism diffuser for high comfort. White painted aluminum die cast body (RAL9003). Very suitable as general lighting in hallways and offices. Delivered including external driver. Direct connection to 220-240VAC. Low maintenance and high life expectancy. Colour stability, Mac Adam <3. Fast and easy mounting with springs. Five years warranty.

Wattage Watts	Kleur Colour	Lumen* Lumen*	Amperage (mA) Amperage (mA)	kg	Noodvoorz. (u) Emergency (h)	Artikel nr. Article no.	Dimbaar (1-10V) Dimmable (1-10V)	Dali Dali	Casambi Casambi
9w	3000k	1215	250	1,3	1/3	62022W.09.30	62022W.09.31	62022W.09.32	62022W.09.35
12w	3000k	1695	350	1,3	1/3	62022W.12.30	62022W.12.31	62022W.12.32	62022W.12.35
18w	3000k	2370	500	1,3	1/3	62022W.18.30	62022W.18.31	62022W.18.32	62022W.18.35
25w	3000k	3235	700	1,3	1/3	62022W.25.30	62022W.25.31	62022W.25.32	62022W.25.35
33w	3000k	4045	900	1,3	1/3	62022W.33.30	62022W.33.31	62022W.33.32	62022W.33.35
39w	3000k	4655	1050	1,3	1/3	62022W.39.30	62022W.39.31	62022W.39.32	62022W.39.35
9w	4000k	1280	250	1,3	1/3	62022W.09.40	62022W.09.41	62022W.09.42	62022W.09.45
12w	4000k	1780	350	1,3	1/3	62022W.12.40	62022W.12.41	62022W.12.42	62022W.12.45
18w	4000k	2490	500	1,3	1/3	62022W.18.40	62022W.18.41	62022W.18.42	62022W.18.45
25w	4000k	3395	700	1,3	1/3	62022W.25.40	62022W.25.41	62022W.25.42	62022W.25.45
33w	4000k	4250	900	1,3	1/3	62022W.33.40	62022W.33.41	62022W.33.42	62022W.33.45
39w	4000k	4810	1050	1,3	1/3	62022W.39.40	62022W.39.41	62022W.39.42	62022W.39.45

* Lichtstroom van armatuur, tolerantie van +/- 10%

* Luminaire luminous flux, tolerance of +/- 10%

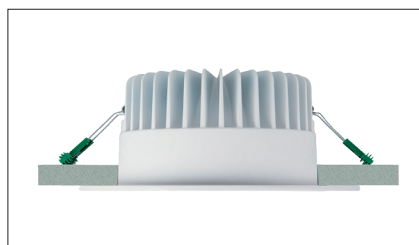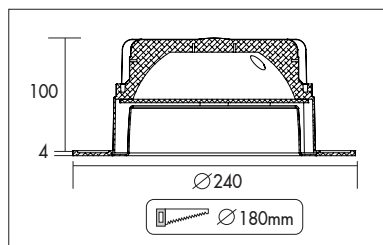

INBOUW DOWNLIGHTS RECESSED DOWNLIGHTS



Opties:

- 1,5 meter snoer met 3-polige Shuko stekker
- 0,5 meter snoer + GST18i3® connector (niet - dimbaar)
- 0,5 meter snoer + GST18i3® and BST14i2 connector (dim)
- 0,5 meter snoer + GST18i5® Blue connector male (dim)
- Andere RAL kleur
- 2700K, 3500k, 5000k of hogere CRI waarde 90/97
- Vlees, brood of Crisp White
- IP65

Options:

- 1,5m cable with Shuko 3-pin plug
- 0,5 meter cable + GST18i3® connector (non - dimmable)
- 0,5 meter cable + GST18i3® and BST14i2 connector (dim)
- 0,5 meter cable + GST18i5® Blue connector male (dim)
- Different RAL color
- 2700k, 3500k, 5000k or higher CRI values 90/97
- Meat, bread or Crisp White
- IP65




optional dust cover 61396-240

Levensduurverwachting (uren)

Life expectancy (hours)

Watt	L80B10	L90B10
9	168.000	79.000
12	166.000	78.000
18	149.000	70.000
25	135.000	64.000
33	120.000	57.000
39	115.000	54.000



62022W.12.30

12w 3000k 1695lm
ηLB 80%

melis lighting

