






RGB and Tunable white wallwasher downlight met een lage inbouwhoogte. Voorzien van decoratieve aluminium (99,9%) hoogglans reflector (UGR<19). Gesatineerde PS Microprisma afscherming voor extra comfort. Voorzien van dimbaar RGB + tunable white LED technology (>100lm/w, 2500-7000k, CRI>90). Aanstuurbaar via DALI DT8 (slecht 1 BUS adres). RGB dimming 0-100%, CCT dimming 5-100%. Wit gelakte (RAL 9003) aluminium behuizing. Zeer geschikt als basis verlichting in scholen, theaters en musea. Inclusief DALI driver. Directe aansluiting op 48VDC of 220-240VAC. Zeer hoge initiële kleurstabiliteit Mac Adam <1. Snelle en eenvoudige montage met veren. Onderhoudsvrij en hoge levensduurverwachting (50.000 uur L90B10). Vijf jaar garantie.

RGB and Tunable white wallwasher downlight with shallow build-in height. Specular aluminum reflector (99,9%), (UGR<19). Satinated PS Microprism diffuser for high comfort. Build-in RGB + tuneable white LED technology (>100lm/w, 2500-7000k, CRI>90). RGB dimming 0-100%, CCT dimming 5-100%. Controllable over DALI DT8 protocol (only 1 bus adress per luminaire). White painted aluminum die cast body (RAL9003). Ideal for schools, museums, theaters and hospitals. Including DALI driver. Direct connection to 48VDC or 220-240VAC. Very high initial colour stability, Mac Adam <1. Low maintenance and high life expectancy (50.000 hours L90B10). Fast and easy mounting with springs. Five years warranty.

| Wattage<br>Watts | Lumen*<br>Lumen* | CRI<br>CRI | Gewicht (kg)<br>Weight (kg) | 48VDC<br>48VDC  | 220-240VAC<br>220-240VAC | Casambi<br>Casambi |
|------------------|------------------|------------|-----------------------------|-----------------|--------------------------|--------------------|
| 22w              | 1800             | >90        | 1,5                         | 62022WS.22.DRGB | 62022WS.22.RGB           | 62022WS.22.RGB5    |
| 31w              | 2345             | >90        | 1,5                         | 62022WS.31.DRGB | 62022WS.31.RGB           | 62022WS.31.RGB5    |


\* Lichtstroom van armatuur, tolerantie van +/- 10%

\* Luminaire luminous flux, tolerance of +/- 10%

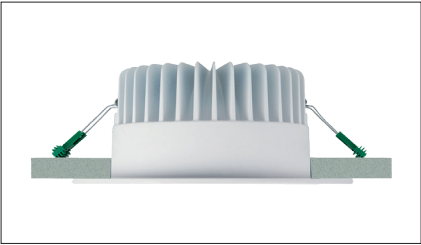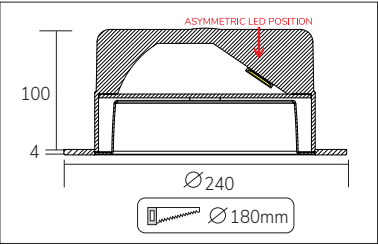

- Opties:**
- GST18i3® connector + BST14i2 connector
  - GST18i5® connector
  - Andere RAL kleur
  - IP65

- Options:**
- GST18i3® connector + BST14i2 connector
  - GST18i5® connector
  - Different RAL color
  - IP65



62022WS.22.DRGB  
22w 1800lm  
ηLB 78,1%

