

Marici 240 Wallwasher Specular TW





Tunable white wallwasher downlight met een lage inbouwhoogte. Voorzien van decoratieve aluminium (99,9%) hoogglans reflector (UGR<19). Gesatineerde PS Microprisma afscherming voor extra comfort. Tunable white - dynamisch mengen van licht kleur tussen 2700K en 6500K (CRI>92). Wit gelakte (RAL 9003) aluminium behuizing. Zeer geschikt als basis verlichting in scholen, theaters en musea. Wordt geleverd inclusief externe DALI driver. Directe aansluiting op 220-240VAC. Kleurstabiliteit Mac Adam <3. Snelle en eenvoudige montage met veren. Onderhoudsvrij en hoge levensduurverwachting (60.000 uur L90B10). Vijf jaar garantie.

Tunable white wallwasher downlight with shallow build-in height. Specular aluminum reflector (99,9%), (UGR<19). Satinated PS Microprism diffuser for high comfort. Tunable white - dynamic mixing of light colour, linear colour mixing between 2700K and 6500k (CRI>92). White painted aluminum die cast body (RAL9003). Very suitable as general lighting in schools, theatres and museums. Delivered including external DALI driver. Direct connection to 220-240VAC. Colour stability, Mac Adam <3. Low maintenance and high life expectancy (60.000 hours L90B10). Fast and easy mounting with springs. Five years warranty.

Wattage Watts	Kleur Colour	Lumen* Lumen*	CRI CRI	Gewicht (kg) Weight (kg)	Noodvoorz. (u) Emergency (h)	Dali Dali	Casambi Casambi
13w	2700-6500k	1210-1410	>92	1,5	1/3	62022W.13.TWS	62022W.13.TWS5
19w	2700-6500k	1655-1935	>92	1,5	1/3	62022W.19.TWS	62022W.19.TWS5
27w	2700-6500k	2340-2755	>92	1,5	1/3	62022W.27.TWS	62022W.27.TWS5
32w	2700-6500k	2825-3245	>92	1,5	1/3	62022W.32.TWS	62022W.32.TWS5

* Lichtstroom van armatuur, tolerantie van +/- 10%

* Luminaire luminous flux, tolerance of +/- 10%

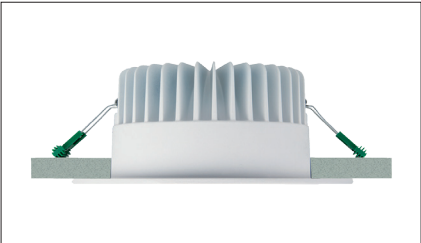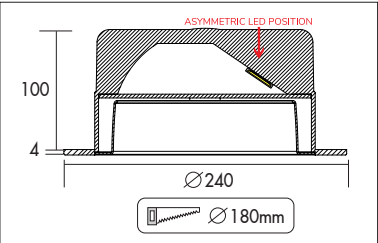


Opties:

- GST18i5® connector
- Andere RAL kleur
- IP65

Options:

- GST18i5® connector
- Different RAL color
- IP65



62022W.13.TWS
13w 2700-6500k 1210-1410lm
ηLB 78%

melis lighting

