

Marici 240 Wallwasher Specular

Ronde LED wallwasher downlight met een lage inbouwhoogte. Voorzien van decoratieve aluminium (99,9%) hoogglans reflector (UGR<19) **CRI>93**. Gesatineerde PS Microprisma afscherming voor extra comfort. Wit gelakte (RAL 9003) aluminium behuizing. Wordt geleverd inclusief externe driver. Directe aansluiting op 220-240VAC. Onderhoudsarm en hoge levensduurverwachting. Hoge kleurconsistentie SDCM <2. Vijf jaar garantie.




Round LED wallwasher downlight with shallow build-in height. Specular aluminum reflector (99,9%), (UGR<19) **CRI>80**. Satinated PS Microprism diffuser for high comfort. White painted die cast aluminum body (RAL9003). Delivered including external driver. Direct connection to 220-240VAC. Low maintenance and high life expectancy. High color consistency SDCM <2. Fast and easy mounting with springs. Five years warranty.

Wattage Watts	Kleur Colour	Lumen* Lumen*	CRI CRI	Amperage (mA) Amperage (mA)	kg kg	Noodvoorz. (u) Emergency (h)	Artikel nr. Article no.	Dimbaar (1-10V) Dimmable (1-10V)	Dali-2 Dali-2	Casambi Casambi
5w	3000k	688	>93	150	1,5	1/3	62022W.05.30.WS	62022W.05.31.WS	62022W.05.32.WS	62022W.05.35.WS
8w	3000k	1142	>93	250	1,5	1/3	62022W.08.30.WS	62022W.08.31.WS	62022W.08.32.WS	62022W.08.35.WS
12w	3000k	1584	>93	350	1,5	1/3	62022W.12.30.WS	62022W.12.31.WS	62022W.12.32.WS	62022W.12.35.WS
17w	3000k	2228	>93	500	1,5	1/3	62022W.17.30.WS	62022W.17.31.WS	62022W.17.32.WS	62022W.17.35.WS
25w	3000k	3047	>93	700	1,5	1/3	62022W.25.30.WS	62022W.25.31.WS	62022W.25.32.WS	62022W.25.35.WS
33w	3000k	3822	>93	900	1,5	1/3	62022W.33.30.WS	62022W.33.31.WS	62022W.33.32.WS	62022W.33.35.WS
39w	3000k	4347	>93	1050	1,5	1/3	62022W.39.30.WS	62022W.39.31.WS	62022W.39.32.WS	62022W.39.35.WS

5w	4000k	688	>93	150	1,5	1/3	62022W.05.40.WS	62022W.05.41.WS	62022W.05.42.WS	62022W.05.45.WS
9w	4000k	1142	>93	250	1,5	1/3	62022W.09.40.WS	62022W.09.41.WS	62022W.09.42.WS	62022W.09.45.WS
12w	4000k	1584	>93	350	1,5	1/3	62022W.12.40.WS	62022W.12.41.WS	62022W.12.42.WS	62022W.12.45.WS
17w	4000k	2228	>93	500	1,5	1/3	62022W.17.40.WS	62022W.17.41.WS	62022W.17.42.WS	62022W.17.45.WS
25w	4000k	3047	>93	700	1,5	1/3	62022W.25.40.WS	62022W.25.41.WS	62022W.25.42.WS	62022W.25.45.WS
33w	4000k	3822	>93	900	1,5	1/3	62022W.33.40.WS	62022W.33.41.WS	62022W.33.42.WS	62022W.33.45.WS
39w	4000k	4347	>93	1050	1,5	1/3	62022W.39.40.WS	62022W.39.41.WS	62022W.39.42.WS	62022W.39.45.WS

* Lichtstroom van armatuur, tolerantie van +/- 10%

* Luminaire luminous flux, tolerance of +/- 10%

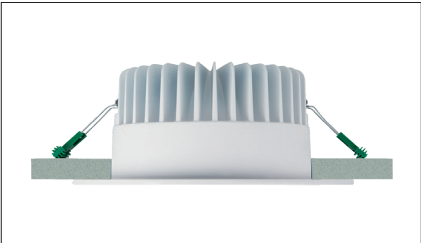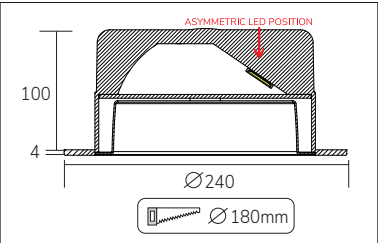


INBOUW DOWNLIGHTS

RECESSED DOWNLIGHTS



- Opties:**
- 1,5 meter snoer met 3-polige Shuko stekker
 - 0,5 meter snoer + GST18i3® connector (niet - dimbaar)
 - 0,5 meter snoer + GST18i3® and BST14i2 connector (dim)
 - 0,5 meter snoer + GST18i5® Blue connector male (dim)
 - Andere RAL kleur
 - 2700K, 3500k, 5000k of hogere CRI waarde 90/97
 - Vlees, brood of Crisp White
 - IP65

- Options:**
- 1,5m cable with Shuko 3-pin plug
 - 0,5 meter cable + GST18i3® connector (non - dimmable)
 - 0,5 meter cable + GST18i3® and BST14i2 connector (dim)
 - 0,5 meter cable + GST18i5® Blue connector male (dim)
 - Different RAL color
 - 2700k, 3500k, 5000k or higher CRI values 90/97
 - Meat, bread or Crisp White
 - IP65



62022W.05.30.WS
5w 3000k 688lm
ηLB 100%

melis lighting