

Marici 240 White TW







Tunable white LED downlight met lage inbouwhoogte en gesatineerde PS Microprisma afscherming. Brede bundel (>73°) en lage verblinding op maximaal vermogen (UGR<18). Wit gelakte aluminium reflector. Tunable white - dynamisch mengen van licht kleur tussen 2700K en 6500K. Wit gelakte (RAL 9003) aluminium behuizing. Zeer geschikt als basis verlichting in scholen, theaters en musea. Wordt geleverd inclusief externe DALI driver. Directe aansluiting op 220-240VAC. Kleurstabiliteit Mac Adam <3. Snelle en eenvoudige montage met veren. Onderhoudsvrij en hoge levensduurverwachting (60.000 uur L90B10). Vijf jaar garantie.

Tunable white modular LED downlight with a satinated PS Microprism diffuser. Wide beam angle (>73°) and low glare at maximum power (UGR<18). white painted aluminum reflector. Tunable white - dynamic mixing of light colour, linear colour mixing between 2700K and 6500K. White painted aluminum die cast body (RAL9003). Very suitable as general lighting in schools, theatres and museums. Delivered including external DALI driver. Direct connection to 220-240VAC. Colour stability, Mac Adam <3. Low maintenance and high life expectancy (60.000 hours L90B10). Fast and easy mounting with springs. Five years warranty.

Wattage Watts	Kleur Colour	Lumen* Lumen*	CRI CRI	Gewicht (kg) Weight (kg)	Noodvoorz. (u) Emergency (h)	Artikel nr. Article no.	Casambi Casambi
13w	2700-6500k	1150-1340	>92	1,3	1/3	62022W.13.TWW	62022W.13.TWWC
19w	2700-6500k	1570-1835	>92	1,3	1/3	62022W.19.TWW	62022W.19.TWWC
27w	2700-6500k	2220-2615	>92	1,3	1/3	62022W.27.TWW	62022W.27.TWWC
32w	2700-6500k	2680-3080	>92	1,3	1/3	62022W.32.TWW	62022W.32.TWWC
37w	2700-6500k	3060-3580	>92	1,3	1/3	62022W.37.TWW	62022W.37.TWWC
48w	2700-6500k	3850-4515	>92	1,3	1/3	62022W.48.TWW	62022W.48.TWWC

* Lichtstroom van armatuur, tolerantie van +/- 10%

* Luminaire luminous flux, tolerance of +/- 10%

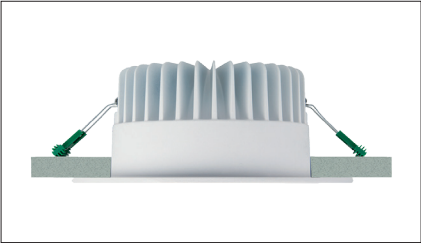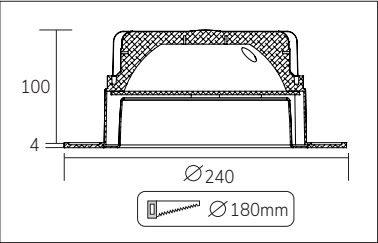


Opties:

- GST18i5® connector
- Andere RAL kleur
- IP65

Options:

- GST18i5® connector
- Different RAL color
- IP65



62022W.13.TWW
13w 2700-6500K 1150-1340lm
ηLB 74%