



Slank LED armatuur voor inbouw in klimaatplafonds. Maatvoering kan aangepast worden nagelang plafondmaat en type. Met hoog voltage en hoog rendement LED lines en brede bundel (88°). Vervaardigd uit wit gelakt (RAL 9003) plaatstaal. Voorzien van de micro prisma afscherming waardoor de helderheid van het armatuur terug gebracht kan worden tot onder L<1000cm/m² met een afscherming groter dan 65°. Hierdoor zeer goed toepasbaar in kantoren, klaslokalen en andere werkruimtes waar hoge eisen aan comfort worden gesteld. Snelle montage met twee L-beugels. Inclusief staalkabel voor valbeveiliging. Onderhoudsarm en hoge levensduurverwachting (50.000 uur L80B10). Kleur stabiliteit, Mac Adam <3. Vijf jaar garantie.

Slim recessed LED luminaire for installation in metal climate ceilings. Luminaire size can be configured according to ceiling type and dimension. With high voltage and high efficiency LED lines and wide beam angle (88°). Housing made of white painted (RAL 9003) sheet metal. With micro prism diffuser that can reduce brightness to under L<1000cm/m² and has an emission angle >65°. Therefore very suitable for offices, classrooms and other working areas where there are high demands for comfortable light. Fast and easy installation with two L-brackets. Low maintenance and high life expectancy (50.000 hours L80B10). Colour stability, Mac Adam <3. Fast and easy mounting. Five years warranty.

Wattage	Kleur	Lumen	CRI (Ra)	L(mm)	B(mm)	H(mm)	Gewicht (kg)	Noodvoorz. (u)	Artikel nr.	Dali	EasySense
Watts	Colour	Lumen	CRI (Ra)	L (mm)	W (mm)	H (mm)	Weight (kg)	Emergency (h)	Article no.	Dali	EasySense
12w	3000k	1395	>80	600	100	63,5	2	1/3	21023W.12.30	21023W.12.32	21023W.12.37
18w	3000k	2090	>80	600	100	63,5	2	1/3	21023W.18.30	21023W.18.32	21023W.18.37
24w	3000k	2780	>80	1200	100	63,5	4	1/3	21023W.24.30	21023W.24.32	21023W.24.37
36w	3000k	4170	>80	1200	100	63,5	4	1/3	21023W.36.30	21023W.36.32	21023W.36.37
30w	3000k	3480	>80	1500	100	63,5	5	1/3	21023W.30.30	21023W.30.32	21023W.30.37
45w	3000k	5220	>80	1500	100	63,5	5	1/3	21023W.45.30	21023W.45.32	21023W.45.37
12w	4000k	1460	>80	600	100	63,5	2	1/3	21023W.12.40	21023W.12.42	21023W.12.47
18w	4000k	2190	>80	600	100	63,5	2	1/3	21023W.18.40	21023W.18.42	21023W.18.47
24w	4000k	2920	>80	1200	100	63,5	4	1/3	21023W.24.40	21023W.24.42	21023W.24.47
36w	4000k	4375	>80	1200	100	63,5	4	1/3	21023W.36.40	21023W.36.42	21023W.36.47
30w	4000k	3650	>80	1500	100	63,5	5	1/3	21023W.30.40	21023W.30.42	21023W.30.47
45w	4000k	5480	>80	1500	100	63,5	5	1/3	21023W.45.40	21023W.45.42	21023W.45.47

* Lichtstroom van armatuur, tolerantie van +/- 10%

* Luminaire luminous flux, tolerance of +/- 10%

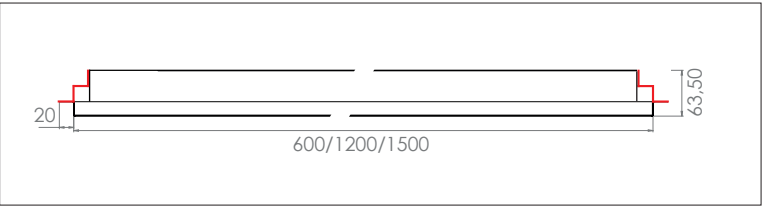


Opties:

- Daglichtregeling
- Bewegingsmelder
- Daglichtregeling & bewegingssensor
- GST18i3® connector + BST14i2 connector
- GST18i5® connector
- Andere RAL kleur

Optional:

- Daylight control sensor
- Motion sensor
- Daylight control & motion sensor
- GST18i3® connector + BST14i2 connector
- GST18i5® connector
- Different RAL colour



21023W.12.30

12w 3000k 1395lm
ηLB 75%