

Pandora SUSPENDED



Rond pendel LED armatuur met minimalistisch design. Behuizing gemaakt van gebogen aluminium profiel. Verkrijgbaar in wit gelakt (RAL 9003) zwart (RAL 9005) of zilver grijs (RAL 9006). Inclusief plafondrozet en 3 staalkabels (3m) met snoer (3,5m) voor centrale of decentrale ophanging. Geschikt voor toepassing in onder andere winkelcentra, hotels en kantoren. Onderhoudsarm en hoge levensduurverwachting (50.000 uur L80B10). Kleur stabiliteit, Mac Adam <3. Vijf jaar garantie.

Round suspended LED luminaire with minimalistic design. Housing made of aluminium profile painted in white (RAL 9003) black (RAL 9005) or silver grey (RAL 9006). Supplied including ceiling cap and 3 steelcables (3m) and wire (3,5m) for central or decentralized suspension. Suitable for shopping centres, hotels and offices. Low maintenance and high life expectancy (50.000 hours L80B10). Colour stability, Mac Adam <3. Warranty 5 years.

Micro Prisma / Micro Prism


Wattage Watts	Kleur Colour	Lumen* Lumen*	CRI CRI	Diameter (mm) Diameter (mm)	Hoogte (mm) Height (mm)	kg kg	Artikel nr. Article no.	Dali Dali	Casambi Casambi
24w	3000k	2160	>80	400	80	2	26003MP_40030	26003MP_40032	26003MP_40035
41w	3000k	3690	>80	600	80	3	26003MP_60030	26003MP_60032	26003MP_60035
65w	3000k	5850	>80	900	80	6	26003MP_90030	26003MP_90032	26003MP_90035
85w	3000k	7650	>80	1200	80	10	26003MP_120030	26003MP_120032	26003MP_120035
105w	3000k	9900	>80	1500	80	15	26003MP_150030	26003MP_150032	26003MP_150035
140w	3000k	12.600	>80	2000	100	18	26003MP_200030	26003MP_200032	26003MP_200035
180w	3000k	16.200	>80	2500	100	21	26003MP_250030	26003MP_250032	26003MP_250035
220w	3000k	19.800	>80	3000	100	24	26003MP_300030	26003MP_300032	26003MP_300035
350w	3000k	31.500	>80	3500	100	27	26003MP_350030	26003MP_350032	26003MP_350035
24w	4000k	2270	>80	400	80	2	26003MP_40040	26003MP_40042	26003MP_40045
41w	4000k	3875	>80	600	80	3	26003MP_60040	26003MP_60042	26003MP_60045
65w	4000k	6145	>80	900	80	6	26003MP_90040	26003MP_90042	26003MP_90045
85w	4000k	8030	>80	1200	80	10	26003MP_120040	26003MP_120042	26003MP_120045
105w	4000k	10.395	>80	1500	80	15	26003MP_150040	26003MP_150042	26003MP_150045
140w	4000k	13.230	>80	2000	100	18	26003MP_200040	26003MP_200042	26003MP_200045
180w	4000k	17.010	>80	2500	100	21	26003MP_250040	26003MP_250042	26003MP_250045
220w	4000k	20.790	>80	3000	100	24	26003MP_300040	26003MP_300042	26003MP_300045
350w	4000k	33.070	>80	3500	100	27	26003MP_350040	26003MP_350042	26003MP_350045

* Lichtstroom van armatuur, tolerantie van +/- 10%


* Luminaire luminous flux, tolerance of +/- 10%

_ W=wit / B=zwart / G=grijs


_ W=white / B=black / G=grey

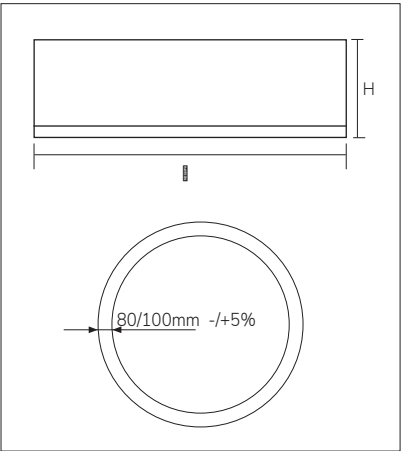

Diameter Diameter	Hoogte Height	Breedte +/-5% Width +/- 5%
400	80mm	80 mm
600	80mm	80mm
900	80mm	80mm
1200	80mm	80mm
1500	80mm	80mm
2000	100mm	100mm
2500	100mm	100mm
3000	100mm	100mm
3500	100mm	100mm

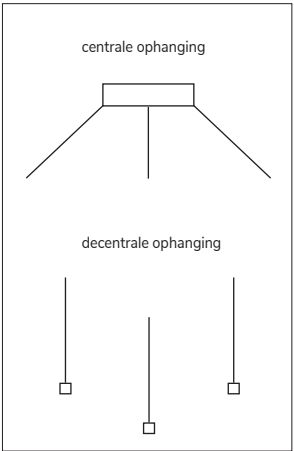

PENDEL ARMATUREN SUSPENDED LUMINAIRES



26003.MP_40030
24w 3000k 2160lm
ηLB 100%

Pandora SUSPENDED

PENDEL ARMATUREN SUSPENDED LUMINAIRES

Opaal / Opal

Wattage Watts	Kleur Colour	Lumen* Lumen*	CRI CRI	Diameter (mm) Diameter (mm)	Hoogte (mm) Height (mm)	kg kg	Artikel nr. Article no.	Dali Dali	Casambi Casambi
24w	3000k	1945	>80	400	80	2	26003OP_40030	26003OP_40032	26003OP_40035
41w	3000k	3325	>80	600	80	3	26003OP_60030	26003OP_60032	26003OP_60035
65w	3000k	5270	>80	900	80	6	26003OP_90030	26003OP_90032	26003OP_90035
85w	3000k	6890	>80	1200	80	10	26003OP_120030	26003OP_120032	26003OP_120035
105w	3000k	9405	>80	1500	80	15	26003OP_150030	26003OP_150032	26003OP_150035
140w	3000k	11.340	>80	2000	100	18	26003OP_200030	26003OP_200032	26003OP_200035
180w	3000k	14.580	>80	2500	100	21	26003OP_250030	26003OP_250032	26003OP_250035
220w	3000k	17.820	>80	3000	100	24	26003OP_300030	26003OP_300032	26003OP_300035
350w	3000k	28.350	>80	3500	100	27	26003OP_350030	26003OP_350032	26003OP_350035
24w	4000k	2040	>80	400	80	2	26003OP_40040	26003OP_40042	26003OP_40045
41w	4000k	3480	>80	600	80	3	26003OP_60040	26003OP_60042	26003OP_60045
65w	4000k	5520	>80	900	80	6	26003OP_90040	26003OP_90042	26003OP_90045
85w	4000k	7225	>80	1200	80	10	26003OP_120040	26003OP_120042	26003OP_120045
105w	4000k	8935	>80	1500	80	15	26003OP_150040	26003OP_150042	26003OP_150045
140w	4000k	11.910	>80	2000	100	18	26003OP_200040	26003OP_200042	26003OP_200045
180w	4000k	15.305	>80	2500	100	21	26003OP_250040	26003OP_250042	26003OP_250045
220w	4000k	18.715	>80	3000	100	24	26003OP_300040	26003OP_300042	26003OP_300045
350w	4000k	29.760	>80	3500	100	27	26003OP_350040	26003OP_350042	26003OP_350045

* Lichtstroom van armatuur, tolerantie van +/- 10%

* Luminaire luminous flux, tolerance of +/- 10%

_ W=wit / B=zwart / G=grijs

_ W=white / B=black / G=grey

